

Track Lighting Guide

Trac-Master® | Trac-Lites™ | HD Commercial | Trac 12™



A modern lounge interior with large windows, patterned armchairs, and track lighting. The room features a high ceiling with recessed lighting and a large window on the left side. The walls are white, and the floor is made of light-colored tiles. There are several armchairs with a circular pattern, a small round table, and a large piece of driftwood in a glass display case. The overall design is clean and contemporary.

juno®

Design leader in the
world of track lighting



Table of Contents

Introduction	2
Product Index	12
Trac-Master®	22
Trac-Lites™	92
HD Commercial – TEK/HTEK	114
Trac 12™	126
Lighting Control & Application Tips	150
Numerical Index	154

Juno®... the industry leader in track lighting systems

A culture of excellence predicated on superior design, performance and service.



Design

Juno Trac systems are unsurpassed for innovation and style, earning industry design awards with regularity. It all starts with a commitment to engineering excellence, resulting in products that combine grace and beauty with supreme functionality. And contractors love them because installation is simple, economical and reliable. Clearly, Juno is the design leader in the world of track lighting.



Performance

Juno Trac products perform at the highest level in terms of illumination effectiveness, energy efficiency and operational economy. With the industry's most extensive range of fixtures, light sources, mounting options, accessories and light control media, Juno products perform above-and-beyond expectations. Whatever the lighting challenge, Juno has a superlative solution.



Service

Juno Trac has a long-held commitment to excellence in customer service. It begins with our nationwide network of sales representatives and distributors who are lighting industry experts. They are backed-up by an inside sales and service team dedicated to keeping the order, delivery, billing and communication process on track. Throughout the industry, we are renowned for pre- and post-sale service that is without equal.



Anaheim Ducks, Honda Center, Anaheim, CA (Paul Nieboer Lighting, Designer)

Grocery



Societe des alcools du Quebec, Brossard, Quebec, Canada (Mark Steele Photography)

Successful grocery retailers excel at making their stores bright and welcoming, and their merchandise appetizing and appealing. Juno Trac systems help grocers make the right impression. From accent lighting for produce displays to decorative lighting at counters, and task lighting at checkout...Juno has the perfect solution for every track application. With a variety of efficient light sources, Juno Trac systems offer substantial energy and maintenance savings, while presenting food products in the best possible light.

Hospitality



Bruxie Gourmet Waffles, Los Angeles, CA (Doug Salin Photography)

From restaurants to reception areas to hotel rooms, Juno Trac lighting helps welcome, acquaint and comfort guests by producing just the right ambiance. Whether creating spaciousness or intimacy, illuminating a task, or highlighting art or architectural details, Juno Trac lighting creates an engaging environment, while providing a high degree of flexibility for fine-tuning the lighting design.

Retail



Anaheim Ducks, Honda Center, Anaheim, CA (Paul Nieboer Lighting, Designer)

Selling...it's the name of the game in retail. And successful retailers know that a properly illuminated store not only drives sales, but also reduces operating costs, resulting in a healthier bottom line. Juno Trac systems offer exceptional retail lighting solutions that create image, attract attention and enhance merchandise appeal. Combining performance, efficiency and versatility, Juno Trac systems can readily adapt to changing store configurations and offer a wide range of light sources and fixture designs to show merchandise to its best advantage.

Commercial



Juno Trac systems play an important role in illuminating commercial, corporate and general office spaces. From reception areas to private offices and conference rooms, they are well suited to diverse applications including task lighting, accenting vertical surfaces and highlighting artwork. Juno Trac lighting is attractive and has a positive impact on employee comfort, productivity and motivation.

Residential



From family rooms and great rooms, to kitchens and home offices, Juno Trac systems provide flexible, affordable and stylish lighting alternatives. They excel at illuminating task surfaces, artwork or vertical elements and help create mood and atmosphere. Use the miniaturized Trac 12™ system in coves and cabinets or any of the Juno systems for accent lighting anywhere in the home. Wherever you look, there is a Juno Trac lighting solution to create a special residential experience.

Exhibit



Johnny Cash Museum, Nashville, TN (Mark Steele Photography)

Juno Trac lighting is the first choice of exhibit and display designers everywhere. The tremendous variety of systems, fixtures and options yields diverse lighting solutions, from art galleries, to kiosks, to trade show booths. Whatever the application, Juno Trac systems deliver unmatched versatility in lighting effects, mounting methods and aesthetics.

Juno® Trac Lighting

The award-winning family of Juno Trac lighting systems provides a multitude of options for illuminating homes, offices, retail stores, hospitality establishments, and commercial facilities. Four distinct track systems include literally thousands of products designed for optimum performance, whether the challenge is display, task, accent, wall wash or general lighting.

Thanks to creative engineering, Juno Trac systems perform at the highest levels of lighting effectiveness, energy efficiency, and operating economy. LED fixtures lead the way in every category, while alternative light sources including halogen assure that there is an answer for every need and budget.



LeMay-America's Car Museum®, Tacoma, WA (Doug Salin Photography)

LED ... on-track with today's most advanced lighting technology

Juno® Trac systems offer an ever-expanding range of LED luminaires across all its platforms. From track fixtures, to linear lighting modules, Juno's LED product development team has harnessed the very latest technologies to take full advantage of LED's spectacular benefits. Juno LED track fixtures produce high-quality light, consume just a fraction of the energy of halogen, and last up to 20-times longer. They save energy, help save the environment, and facilitate compliance with today's stringent energy codes.

Juno Cylindra™, Vertical Cylinders, Integral Driver Cylinders, and Conix® II LED Track Fixtures are contemporary yet timeless classics. They produce spot, narrow flood, flood, or wide flood illumination using just a fraction of the energy of halogen. The go-to choice for retail display lighting.

Juno Arc™ LED Track Fixtures employ a distinctive aesthetic and a unique optical system to deliver powerful illumination, while using far less energy than equivalent halogen.

Juno Trac 12™ LED Modules mount on the low-profile Trac 12 system for high-performance linear lighting and consume just 15% of the energy of equivalent xenon. In addition to the standard modules, exclusive WarmDim® modules that simulate the warm glow of incandescent dimming are also available.

Juno Trac 12™ LED Mini-Cylinders and Directionals are no bigger than the palm of your hand, but produce big-time illumination and energy savings. Ideal for residential and retail accent lighting in confined quarters.

Masters in the art of track lighting

The Juno brand offers a dazzling array of track systems, fixture/light-source combinations, and accessories. Every product is designed to deliver optimum performance, reliability, and efficiency. And with complete fixture families available across all systems, a homogeneous ceiling appearance is easily achieved.

Trac-Master® is the workhorse of the Juno Trac system families, featuring the largest selection of fixtures, light sources, accessories, and options. 1-circuit or 2-circuit, line voltage or low voltage, Trac-Master has it all, does it all.

Trac-Lites™ is an economical, low-profile system, offering an assortment of traditional fixture styles and a variety of line voltage kits. Trac-Lites track is fully compatible with Trac-Master fixtures; likewise, Trac-Lites fixtures can be used on Trac-Master track, providing ultimate design flexibility.

HD Commercial Trac Lighting is a 2-circuit/2-neutral system that is ideal for dimming-intensive applications or where grid layouts or more robust track systems are desired. It is available for either 120V or 277V operating environments.

Trac 12™ is a miniaturized, low voltage system that goes where no other track system can. It provides accent lighting in cramped quarters, or fits easily into casework, coves, or displays to create linear lighting effects. **Trac12/25** is the rigid profile, higher amperage, low voltage system which is ideal for miniature suspended applications.

Designed and Manufactured Locally

Many U.S. projects include provisions that require procurement of domestic products. These requirements typically apply to U.S. federal projects but may also apply to state or municipal funded projects. A vast assortment of Juno Trac products are manufactured in our U.S. or North American manufacturing facilities, including all of our LED track fixtures, many non-LED track fixtures, track sticks and many of the track system components and accessories needed to fulfill a complete job bill of material. These products are constantly evolving, and our website is designed to provide the most current compliance information. For more details, please visit the extensive resource found at <https://www.acuitybrands.com/resources/buy-american> or search "Buy-American" on our website.




Product Index



Trac-Master® Multi-Lamp

LED Series




Uno/Duo™ Halogen PAR30




LED Vertical Cylinder



LED Conix® II




LED Cylindra™



LED Flat Back Cylinder



LED Arc™




LED Wall Wash/Floods


LED-Compatible Lampholders

Professional Halogen Series

Designer Series



LED Die Cast Gimbal
Ring PAR Lampholders



MR16 LED-Compatible
Lampholders



Cylindra™ MR16




Close-Ups

Classic Series




Open Back Gimbals



Front Lamping Gimbals



Universals



Flat Back Cylinders

Product Index

Trac-Master®

Low Voltage



MR16 LED-Compatible
Lampholders - Lily16



Cylindra™ MR16

Track System Components



One-Circuit System




Two-Circuit System




Recessed System

Track System Components




Extension Wands



Fixture Slope
Ceiling Adapter



Monopoints



Special Mountings



Low Voltage
Transformers


Accessories



Silver Bullet



Current Limiting Feeds









Light Control
Accessories



Alternate
Track Adapters

Trac-Lites™ LED

LED PRODUCT Page 92  Integral Driver Cone - 900 Lumens	LED PRODUCT Page 93  Integral Driver Cylinder - 1000 Lumens	LED PRODUCT Page 93  Integral Driver Cylinder - 1300 Lumens	LED PRODUCT Page 94  Integral Driver Cylinder - 2200 Lumens
LED PRODUCT Page 94  Integral Driver Cylinder - 3300 Lumens	LED PRODUCT Page 95  Integral Driver Cylinder with Adjustable Beam - 1200 Lumens		











Line Voltage Spotlights

Page 96  Open Back Spotlight GU10	Page 96  Round Back Cylinder GU10	Page 96  Cast Cube GU10	Page 96  Flare GU10	Page 96  Odyssey GU10
Page 96  Bell GU10	Page 97  Universal	Page 97  Flared Gimbals	Page 98  Flared Steps	Page 99  Round Back Cylinders
Page 99  Flat Back Cylinders	Page 100  Step Cylinders	Page 100  Open Back Spotlights		


Product Index

Trac-Lites™

Track System Components

Page 101  Track Sections	Page 101  Electrical Feeds	Page 103  Connectors	Page 104  Current Limiting Feeds	Page 105  Current Limiting Pendant Stem Kits
Page 106  Mounting Accessories	Page 108  Cable Suspension Kit	Page 107  Monopoints	Page 110  Extension Wands	Page 110  Special Mounting Accessories

Track Kits

Page 112  Track Kits
--

Accessories

Page 113  Light Control Accessories
--

Product Index

HD Commercial Track 120V TEK Track System Components

Page 115



Track Sections

Page 115



Connectors

Page 117




Accessories

Page 118



Compatible Fixtures

Page 119



Track Configurations

277V HTEK Track System Components

Page 120



Track Sections

Page 121



Connectors

Page 122




Accessories

Page 123



Compatible Fixtures

Page 124



Track Configurations

Product Index

Trac 12™

Linear Lighting Lampholders



Page 126

Low Power LED Modules



Page 128

Wedge Base Lampholder

LED Spotlights




Page 130

LED Integral Driver Cylinder



Page 131

LED Cylindra™



Page 132

LED Mini-Cylinder

MR16 Lampholders



Page 133

Lily16



Page 134

Cylindra™



Page 135

Gimbal Rings

Product Index

Trac 12™

Track System Components

Page 136



Trac 12/25 Low Voltage Track System

Page 139



Trac 12™ Low Voltage Track System

Page 141




Electronic Transformers

Page 143



Remote Mount Magnetic Transformers

Page 144



Extension Wands

Accessories

Page 145




Monopoints

Page 147



Light Control Accessories

Page 148




Cabinetry and Cove Lighting Guidelines
LED or Halogen

Applications

Lighting Control & Application Tips


Applying and Controlling Light

Page 150




Light Control Lenses

Page 151




Objects and Artwork

Page 152



Task Lighting

Page 153



Wall Lighting

LED Lighting

Fixture Selection



The task of finding the right LED fixture can be intimidating. Choices might be driven by fixture design aesthetics, or by beam distribution requirements, or by available finishes, or by power consumption limitations, or by a host of other design features or performance data. Juno Trac fixtures have you covered on all of these fronts, plus practically any other performance characteristic you can think of. More often than not, the most common starting point for this search ends up being delivered lumens.

To help guide you quickly to the lumen packages we offer, the table on the right gives you an at-a-glance breakdown of our track fixture offering based on their nominal delivered lumens. The intent of this information not to select the fixture for you. The intent is to enable you to quickly navigate to a selection of fixtures that are most likely to suit your needs. Now, not every fixture selection will as simple as just determining lumens, but hopefully this information will get you well on your way.

For Fixtures that deliver:

< 500 Lumens	See Page:
TL114	132
500 - 999 Lumens	
TL381L	130
TL252L	131
R600L	92
1000 - 1499 Lumens	
R605L	93
T252L	35
T261L	29
T271L	40
T381L	23
R620L	95
R606L	93
1500 - 1999 Lumens	
T254L	36
T262L	30
T272L	24
T1050L Wall Washer	41
T382L	24
2000 - 2999 Lumens	
T263L	31
T256L Wall Washer	44
R610L	94
T383L	25
T1051L Wall Washer	41
T283L	39
3000 - 3999 Lumens	
T385L	26
T1052L Wall Washer	41
R612L	94
T285L	39
T286L	39
T265L	32
T1053L Wall Washer	41
T255L	38
4000 - 4999 Lumens	
T1054L Wall Washer	41
T257L Wall Washer	45
T387L	27
T267L	34
5000 - 5999 Lumens	
T1056L Wall Washer	42
T388L	28
> 6000 Lumens	
T1058L Wall Washer	42



Toronto Maple Leafs, Air Canada Centre, Toronto, Canada (Paul Nieboer Lighting, Designer, David Whittaker Photography)

Juno® Trac-Master®



Founded in 1976, Juno Lighting's first product in the marketplace was Juno Trac-Master track. Juno Trac-Master has been a leader in track lighting for over 45 years, setting the bar over and over with quality and value that is second to none. Leading the way with the development of our first LED platforms in 2008, our engineering experience and expertise shines through with each new product we introduce. Offering fixtures that deliver specification-grade performance, and comprehensive systems that enable flexible design and installation, Trac-Master is the obvious choice for track lighting solutions.

Trac-Master® | Multi-Lamp

Uno/Duo™ – PAR30

Uno/Duo™ – Open PAR30

The concentric gimbal rings springing off the bottom edge of the chiseled monolith is a perfect example of “form follows function” in design. The monolith remains perfectly aligned with the track while the gimbal ring mechanisms are free to provide broad aiming capability. On PAR30 versions, the monolith simply provides the pivot point for the gimbal rings.




Catalog #
T831 WH

Finish
White

Lamp
One 75W PAR30

Dimensions




Catalog #
T832 WH

Finish
White

Lamp
Two 75W PAR30

Dimensions



Trac-Master® | LED Series

11W/16W Vertical Cylinder LED




Vertical Cylinder T381L


The classic appearance of the T381L Vertical Cylinder LED fixture offers a fresh take on the traditional aesthetic. This 11W/16W state-of-the-art track light delivers up to 1249 lumens, is up to 80% more efficient than equivalent halogen and has a rated life of 50,000 hours. It is available in 2700K, 3000K, 3500K and 4000K color temperatures and 80 or 90 CRI versions. Optional SpectralWhite color/white enhancing versions render colors richly and make whites appear naturally brilliant; optional WarmDim® version warms the color of the LED light on a gentle gradient as it dims light output, delivering the feeling of halogen lighting with the long life and energy savings of LED. These fixtures have an integral bayonet-mount accessory holder that accommodates one accessory if desired.



Dimensions - Static White



Dimensions - WarmDim

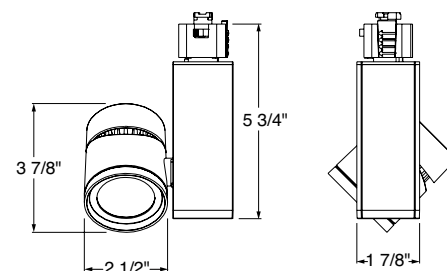

Ordering Information

Ordering Example: T381L G2 30K SPW PDIM NFL WH

Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T381L 11W Vertical Cylinder LED (Static White)	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI	OFF ¹ On/Off (Non-Dimming)	SP Spot	BL Black
			30K 3000K	90CRI 90 CRI		NFL Narrow Flood	SL Silver
			35K 3500K	SPW ³ SpectralWhite	PDIM Phase Dimmable	FL Flood	WH White
			40K 4000K			WFL Wide Flood	
T381L 16W Vertical Cylinder LED (WarmDim®)	HTEK ¹ HTEK 277V Track Adapter		WDIM HALR ² WarmDim® 3000K-1800K				
	TEK TEK 120V Track Adapter						
	GTYPE G-Type Track Adapter						
	HTYPE H-Type Track Adapter						
	LTYPE L-Type Track Adapter						
	CPY ⁴ Canopy Mounted						

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² WDIM HALR available with 90CRI only. ³ 3000K and 3500K only.

⁴ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T381L
Color Filters	CGF 200
Dichroic Filters	DGF 200
Dichroic Color Correction Filters	DCCF 200
Diffusion Lens	DIFF 200
Uniformity Lens	SOLITE 200
UV Filter	UVF 200
Prismatic Spread Lens	PRISM 200
Linear Spread Lens	LSPREAD 200
Hexcell Louver	HCLBL 200
Snoot	SNOOTBL 200

Trac-Master® | LED Series

17W Vertical Cylinder LED




Vertical Cylinder T382L

The classic appearance of the T382L Vertical Cylinder LED fixture offers a fresh take on the traditional aesthetic. This 17W state-of-the-art track light delivers up to 1845 lumens, is up to 80% more efficient than equivalent halogen and has a rated life of 50,000 hours. It is available in 2700K, 3000K, 3500K and 4000K color temperatures and 80 or 90 CRI versions. Optional SpectralWhite color/white enhancing versions render colors richly and make whites appear naturally brilliant. These fixtures have an integral bayonet-mount accessory holder that accommodates one accessory if desired.



Dimensions

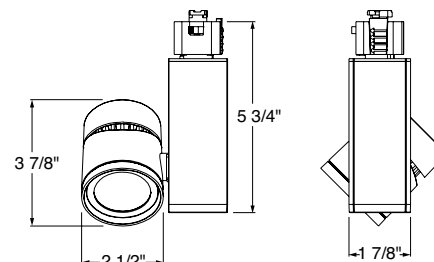

Ordering Information

Ordering Example: T382L G2 30K SPW PDIM NFL WH

Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T382L 17W Vertical Cylinder LED	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot	BL Black SL Silver WH White
	HTEK ¹ HTEK 277V Track Adapter		30K 3000K	90CRI 90 CRI		NFL Narrow Flood	
	TEK TEK 120V Track Adapter		35K 3500K	SPW ² SpectralWhite		FL Flood	
	GTYPE G-Type Track Adapter		40K 4000K			WFL Wide Flood	
	HTYPE H-Type Track Adapter						
	LTYPE L-Type Track Adapter						
	CPY ³ Canopy Mounted						

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² 3000K and 3500K only.

³ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T382L
Color Filters	CGF 200
Dichroic Filters	DGF 200
Dichroic Color Correction Filters	DCCF 200
Diffusion Lens	DIFF 200
Uniformity Lens	SOLITE 200
UV Filter	UVF 200
Prismatic Spread Lens	PRISM 200
Linear Spread Lens	LSPREAD 200
Hexcell Louver	HCLBL 200
Snoot	SNOOTBL 200

Trac-Master® | LED Series

24W Vertical Cylinder LED




Vertical Cylinder T383L

The classic appearance of the T383L Vertical Cylinder LED fixture offers a fresh take on the traditional aesthetic. This 24W state-of-the-art track light delivers up to 2446 lumens, is up to 80% more efficient than equivalent halogen and has a rated life of 50,000 hours. It is available in 2700K, 3000K, 3500K and 4000K color temperatures and 80 or 90 CRI versions. Optional SpectralWhite color/white enhancing versions render colors richly and make whites appear naturally brilliant. These fixtures have an integral bayonet-mount accessory holder that accommodates up to two accessories if desired.



Dimensions

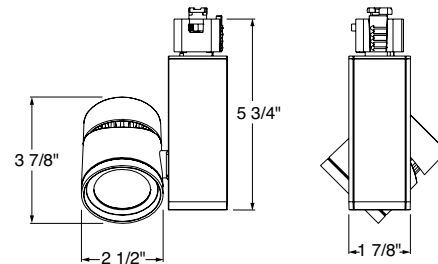

Ordering Information				Ordering Example: T383L G2 27K 80CRI PDIM SP BL			
Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T383L 24W Vertical Cylinder LED	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot NFL Narrow Flood FL Flood WFL Wide Flood	BL Black SL Silver WH White
	HTEK ¹ HTEK 277V Track Adapter		30K 3000K	90CRI 90 CRI			
	TEK TEK 120V Track Adapter		35K 3500K	SPW ² SpectralWhite			
	GTYPE G-Type Track Adapter		40K 4000K				
	HTYPE H-Type Track Adapter						
	LTYPE L-Type Track Adapter						
	CPY ³ Canopy Mounted						

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² 3000K and 3500K only.

³ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories	
For Fixtures	T383L
Color Filters	CGF 200
Dichroic Filters	DGF 200
Dichroic Color Correction Filters	DCCF 200
Diffusion Lens	DIFF 200
Uniformity Lens	SOLITE 200
UV Filter	UVF 200
Prismatic Spread Lens	PRISM 200
Linear Spread Lens	LSPREAD 200
Hexcell Louver	HCLBL 200
Snoot	SNOOTBL 200

Trac-Master® | LED Series

30W Vertical Cylinder LED




Vertical Cylinder T385L

The classic appearance of the T385L Vertical Cylinder LED fixture offers a fresh take on the traditional aesthetic. This 30W state-of-the-art track light delivers up to 3250 lumens, is up to 80% more efficient than equivalent halogen and has a rated life of 50,000 hours. It is available in 2700K, 3000K, 3500K and 4000K color temperatures and 80 or 90 CRI versions. Optional SpectralWhite color/white enhancing versions render colors richly and make whites appear naturally brilliant. These fixtures have an integral bayonet-mount accessory holder that accommodates up to two accessories if desired.



Dimensions

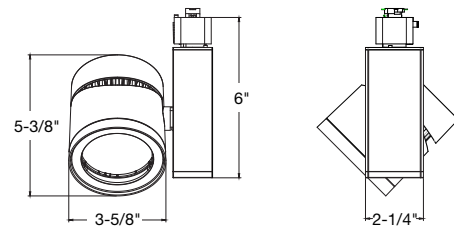

Ordering Information

Ordering Example: T385L G2 27K 80CRI PDIM SP BL

Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T385L 30W Vertical Cylinder LED	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI	OFF¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot	BL Black SL Silver WH White
	HTEK¹ HTEK 277V Track Adapter		30K 3000K	90CRI 90 CRI		NFL Narrow Flood	
	TEK TEK 120V Track Adapter		35K 3500K	SPW² SpectralWhite		FL Flood	
	GTYPE G-Type Track Adapter		40K 4000K			WFL Wide Flood	
	HTYPE H-Type Track Adapter						
	LTYPE L-Type Track Adapter						
	CPY³ Canopy Mounted						

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² 3000K and 3500K only.

³ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T385L
Color Filters	CGF 275
Dichroic Filters	DGF 275
Diffusion Lens	DIFF 275
Uniformity Lens	SOLITE 275
UV Filter	UVF 275
Prismatic Spread Lens	PRISM 275
Linear Spread Lens	LSPREAD 275
Hexcell Louver	HCLBL 300
Snoot	SNOOTBL 275

Trac-Master® | LED Series

46W Vertical Cylinder LED




Vertical Cylinder T387L

The classic appearance of the T387L Vertical Cylinder LED fixture offers a fresh take on the traditional aesthetic. This 46W state-of-the-art track light delivers up to 4651 lumens, is up to 80% more efficient than equivalent halogen and has a rated life of 50,000 hours. It is available in 2700K, 3000K, 3500K and 4000K color temperatures and 80 or 90 CRI versions. Optional SpectralWhite color/white enhancing versions render colors richly and make whites appear naturally brilliant. These fixtures have an integral bayonet-mount accessory holder that accommodates up to two accessories if desired.



Dimensions

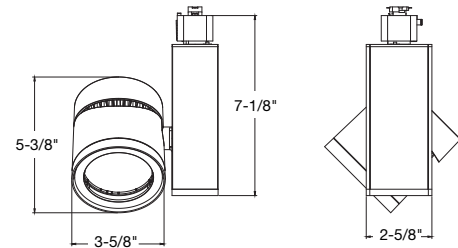

Ordering Information

Ordering Example: T387L G2 30K 90CRI PDIM NFL SL

Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T387L 46W Vertical Cylinder LED	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot	BL Black SL Silver WH White
	HTEK ¹ HTEK 277V Track Adapter		30K 3000K	90CRI 90 CRI		NFL Narrow Flood	
	TEK TEK 120V Track Adapter		35K 3500K	SPW ² SpectralWhite		FL Flood	
	GTYPE G-Type Track Adapter		40K 4000K			WFL Wide Flood	
	HTYPE H-Type Track Adapter						
	LTYPE L-Type Track Adapter						
	CPY ³ Canopy Mounted						

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² 3000K and 3500K only.

³ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T387L
Color Filters	CGF 275
Dichroic Filters	DGF 275
Diffusion Lens	DIFF 275
Uniformity Lens	SOLITE 275
UV Filter	UVF 275
Prismatic Spread Lens	PRISM 275
Linear Spread Lens	LSPREAD 275
Hexcell Louver	HCLBL 300
Snoot	SNOOTBL 275

Trac-Master® | LED Series


55W Vertical Cylinder LED

Vertical Cylinder T388L

The classic appearance of the T388L Vertical Cylinder LED fixture offers a fresh take on the traditional aesthetic. This 55W state-of-the-art track light delivers up to 5550 lumens, is up to 80% more efficient than equivalent halogen and has a rated life of 50,000 hours. It is available in 2700K, 3000K, 3500K and 4000K color temperatures and 80 or 90 CRI versions. Optional SpectralWhite color/white enhancing versions render colors richly and make whites appear naturally brilliant. These fixtures have an integral bayonet-mount accessory holder that accommodates up to two accessories if desired.



Dimensions

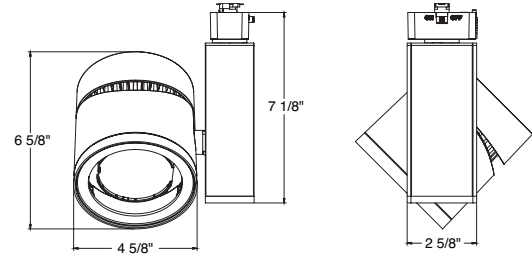

Ordering Information

Ordering Example: T388L 30K SPW PDIM NFL WH

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T388L 55W Vertical Cylinder LED	(Blank) Juno Universal 120V Track Adapter	27K 2700K	80CRI 80 CRI	OFF ¹ On/Off (Non-Dimming)	SP Spot	BL Black
		30K 3000K	90CRI 90 CRI		NFL Narrow Flood	SL Silver
	HTEK ¹ HTEK 277V Track Adapter	35K 3500K	SPW ² SpectralWhite	PDIM Phase Dimmable	FL Flood	WH White
	TEK TEK 120V Track Adapter	40K 4000K			WFL Wide Flood	
	GTYPE G-Type Track Adapter					
	HTYPE H-Type Track Adapter					
	LTYPE L-Type Track Adapter					
	CPY ³ Canopy Mounted					

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² 3000K and 3500K only.

³ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T388L
Color Filters	CGF 375
Dichroic Filters	DGF 375
Diffusion Lens	DIFF 375
Uniformity Lens	SOLITE 375
UV Filter	UVF 375
Prismatic Spread Lens	PRISM 375
Linear Spread Lens	LSPREAD 375
Hexcell Louver	HCLBL 375
Cube Cell Louver	CCLBL 375
Snoot	SNOOTBL 375
Barn Doors	TBDR BLCK 375

Trac-Master® | LED Series

11W/16W Conix® II LED




Conix® II T261L

The sleek sculpted aesthetic of the Conix II LED fixtures is unparalleled in the industry. Their elegance is carried through the entire design for a fresh, contemporary appeal. The T261L fixtures have integral TIR optics which enable uniform spot, narrow flood and flood or wide flood distributions to be achieved. Optional SpectralWhite color/white enhancing versions render colors richly and make whites appear naturally brilliant; optional WarmDim® version warms the color of the LED light on a gentle gradient as it dims light output, delivering the feeling of halogen lighting with the long life and energy savings of LED. These fixtures have an integral, bayonet-mount accessory holder that accommodates one accessory if desired. The T261L can deliver up to 1132 lumens, utilizing less than 1/3 of the energy of halogen equivalents and having a rated life of 50,000 hours.



Dimensions

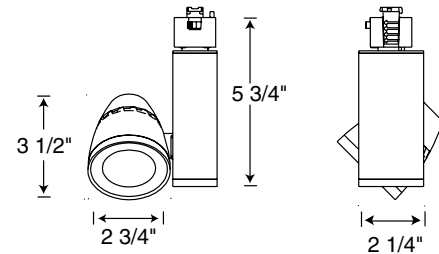

Ordering Information		Ordering Examples: T261L G3 30K 80CRI PDIM SP WH, T261L TEK G3 30K 80CRI PDIM SP BL							
Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution		Finish	
T261L 11W Conix II LED (Static White)	(Blank) Juno Universal 120V Track Adapter	G3 Generation 3	27K 2700K	80CRI 80 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP	Spot	BL	Black
			30K 3000K	90CRI 90 CRI		NFL	Narrow Flood	SL	Silver
			35K 3500K	SPW ³ SpectralWhite		FL	Flood	WH	White
T261L 16W Conix II LED (WarmDim®)	HTEK ¹ HTEK 277V Track Adapter		40K 4000K			WFL	Wide Flood		
	TEK TEK 120V Track Adapter		WDIM HALR ² WarmDim® 3000K-1800K						
	GTYPE G-Type Track Adapter								
	HTYPE H-Type Track Adapter								
	LTYPE L-Type Track Adapter								
	CPY ⁴ Canopy Mounted								

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² WDIM HALR available with 90CRI only. ³ 3000K and 3500K only.

⁴ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories	
For Fixtures	T261L
Color Filters	CGF 200
Dichroic Filters	DGF 200
Dichroic Color Correction Filters	DCCF 200
Diffusion Lens	DIFF 200
Uniformity Lens	SOLITE 200
UV Filter	UVF 200
Prismatic Spread Lens	PRISM 200
Linear Spread Lens	LSPREAD 200
Hexcell Louver	HCLBL 200
Snoot	SNOOTBL 200

Trac-Master® | LED Series

16W Conix® II LED




Conix® II T262L

The sleek sculpted aesthetic of the Conix II LED fixtures is unparalleled in the industry. Their elegance is carried through the entire design for a fresh, contemporary appeal. The T262L fixtures have integral reflectors which enable uniform spot, narrow flood or flood distributions to be achieved. These fixtures have an integral, bayonet-mount accessory holder that accommodates up to two accessories if desired in place of the clear glass lens provided. The T262L can deliver up to 1675 lumens, utilizing less than 1/3 of the energy of halogen equivalents and having a rated life of 50,000 hours.



Dimensions

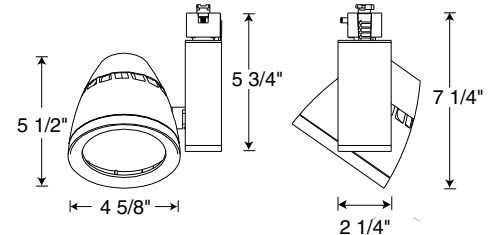

Ordering Information		Ordering Examples: T262L G2 30K 80CRI PDIM SP WH, T262L TEK G2 30K 80CRI PDIM SP BL					
Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T262L 16W Conix II LED	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot NFL Narrow Flood FL Flood	BL Black SL Silver WH White
	HTEK ¹ HTEK 277V Track Adapter		30K 3000K	90CRI 90 CRI			
	TEK TEK 120V Track Adapter		35K 3500K	97CRI ² 97 CRI			
	GTYPE G-Type Track Adapter		40K 4000K				
	HTYPE H-Type Track Adapter						
	LTYPE L-Type Track Adapter						
	CPY ³ Canopy Mounted						

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² 97CRI only available with 27K, 30K and 40K options.

³ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T262L
Color Filters	CGF 375
Dichroic Filters	DGF 375
Diffusion Lens	DIFF 375
Uniformity Lens	SOLITE 375
UV Filter	UVF 375
Prismatic Spread Lens	PRISM 375
Linear Spread Lens	LSPREAD 375
Hexcell Louver	HCLBL 375
Cube Cell Louver	CCLBL 375
Snoot	SNOOTBL 375
Barn Doors	TBDR BLCK 375

Trac-Master® | LED Series

21W Conix® II LED




Conix® II T263L

The sleek sculpted aesthetic of the Conix II LED fixtures is unparalleled in the industry. Their elegance is carried through the entire design for a fresh, contemporary appeal. The T263L fixtures have integral reflectors which enable uniform spot, narrow flood or flood distributions to be achieved. These fixtures have an integral, bayonet-mount accessory holder that accommodates up to two accessories if desired in place of the clear glass lens provided. The T263L can deliver up to 2228 lumens, utilizing less than 1/3 of the energy of halogen equivalents and having a rated life of 50,000 hours.



Dimensions

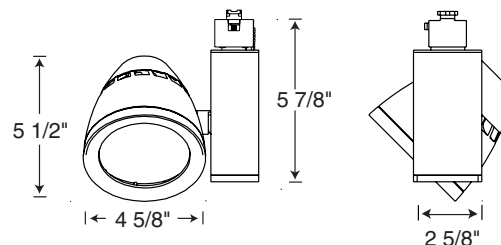

Ordering Information		Ordering Examples: T263L G3 30K 80CRI PDIM SP WH, T263L TEK G3 30K 80CRI PDIM SP BL					
Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T263L 21W Conix II LED	(Blank) Juno Universal 120V Track Adapter	G3 Generation 3	27K 2700K	80CRI 80 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot	BL Black
	HTEK ¹ HTEK 277V Track Adapter		30K 3000K	90CRI 90 CRI		NFL Narrow Flood	SL Silver
	TEK TEK 120V Track Adapter		35K 3500K	97CRI ² 97 CRI		FL Flood	WH White
	GTYPE G-Type Track Adapter		40K 4000K				
	HTYPE H-Type Track Adapter						
	LTYPE L-Type Track Adapter						
	CPY ³ Canopy Mounted						

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² 97CRI only available with 27K, 30K and 40K options.

³ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T263L
Color Filters	CGF 375
Dichroic Filters	DGF 375
Diffusion Lens	DIFF 375
Uniformity Lens	SOLITE 375
UV Filter	UVF 375
Prismatic Spread Lens	PRISM 375
Linear Spread Lens	LSPREAD 375
Hexcell Louver	HCLBL 375
Cube Cell Louver	CCLBL 375
Snoot	SNOOTBL 375
Barn Doors	TBDR BLCK 375

Trac-Master® | LED Series

36W Conix® II LED




Conix® II T265L

The sleek sculpted aesthetic of the Conix II LED fixtures is unparalleled in the industry. Their elegance is carried through the entire design for a fresh, contemporary appeal. The T265L fixtures have integral reflectors which enable uniform spot, narrow flood or flood distributions to be achieved. These fixtures have an integral, bayonet-mount accessory holder that accommodates up to two accessories if desired in place of the clear glass lens provided. The T265L can deliver up to 3814 lumens, utilizing less than 1/3 of the energy of halogen equivalents and having a rated life of 50,000 hours.



Dimensions

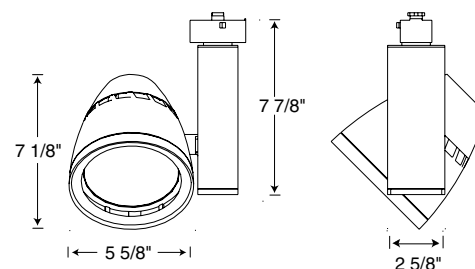

Ordering Information

Ordering Example: T265L G3 27K 90CRI PDIM FL BL

Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T265L 36W Conix II LED	(Blank) Juno Universal 120V Track Adapter	G3 Generation 3	27K 2700K	80CRI 80 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot NFL Narrow Flood FL Flood	BL Black
	HTEK ¹ HTEK 277V Track Adapter		30K 3000K	90CRI 90 CRI			SL Silver
	TEK TEK 120V Track Adapter		35K 3500K	SPW ² SpectralWhite			WH White
	GTYPE G-Type Track Adapter		40K 4000K				
	HTYPE H-Type Track Adapter						
	LTYPE L-Type Track Adapter						
	CPY ³ Canopy Mounted						

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² 3000K and 3500K only.

³ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T265L
Color Filters	CGF 469
Dichroic Filters	DGF 469
Diffusion Lens	DIFF 469
Uniformity Lens	SOLITE 469
UV Filter	UVF 469
Prismatic Spread Lens	PRISM 469
Linear Spread Lens	LSPREAD 469
Hexcell Louver	HCLBL 469
Cube Cell Louver	CCLBL 469
Snoot	SNOOTBL 469
Barn Doors	TBDR BLCK 469



Kowalski's Market, Excelsior, MN (Mark Steele Photography)

Trac-Master® | LED Series

52W Conix® II LED




Conix® II T267L

The sleek sculpted aesthetic of the Conix II LED fixtures is unparalleled in the industry. Their elegance is carried through the entire design for a fresh, contemporary appeal. The T267L fixtures have integral reflectors which enable uniform spot, narrow flood, flood or wide flood distributions to be achieved. These fixtures have an integral, bayonet-mount accessory holder that accommodates up to two accessories if desired in place of the clear glass lens provided. The T267L can deliver up to 5042 lumens, utilizing less than 1/3 of the energy of halogen equivalents and having a rated life of 50,000 hours.



Dimensions

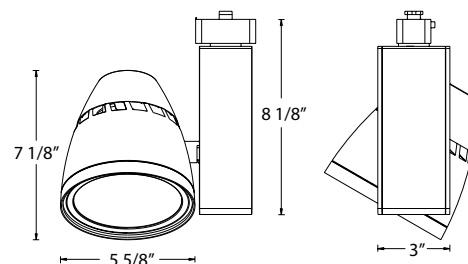

Ordering Information		Ordering Examples: T267L G2 30K 80CRI PDIM SP WH, T267L TEK G2 30K 80CRI PDIM SP BL					
Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T267L 52W Conix II LED	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI 90CRI 90 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot	BL Black SL Silver WH White
	HTEK ¹ HTEK 277V Track Adapter		30K 3000K			NFL Narrow Flood	
	TEK TEK 120V Track Adapter		35K 3500K			FL Flood	
	GTYPE G-Type Track Adapter		40K 4000K			WFL Wide Flood	
	HTYPE H-Type Track Adapter						
	LTYPE L-Type Track Adapter						
	CPY ² Canopy Mounted						

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only.

² CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T267L
Color Filters	CGF 469
Dichroic Filters	DGF 469
Diffusion Lens	DIFF 469
Uniformity Lens	SOLITE 469
UV Filter	UVF 469
Prismatic Spread Lens	PRISM 469
Linear Spread Lens	LSPREAD 469
Hexcell Louver	HCLBL 469
Cube Cell Louver	CCLBL 469
Snoot	SNOOTBL 469
Barn Doors	TBDR BLACK 469

Trac-Master® | LED Series

11W Cylindra™ LED




Cylindra™ T252L

At up to 1066 lumens, the T252L Cylindra LED approximates the light output and distribution of 75W MR16 halogen lamps, utilizing less than 15% of the energy and having a rated life of 50,000 hours. The contemporary styling of the Cylindra LED enables it to subtly enhance practically any decor without diverting attention from the surrounding environment. Soft curved surfaces combine with clean, crisp edges to provide a uniquely attractive aesthetic. Cylindra's integral, bayonet mounted accessory holder accommodates one light control accessory if desired (except wide flood). TWLED Extension Wands are also available, enabling the T252L to be moved closer to the object being illuminated without lowering the track mounting plane.



Dimensions



Ordering Information

Ordering Example: T252L G2 27K 90CRI PDIM SP WH

Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution		Finish	
T252L 11W Cylindra LED	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI	PDIM Phase Dimmable	SP	Spot	BL	Black
			30K 3000K	90CRI 90 CRI		NFL	Narrow Flood	SL	Silver
	GTYPE G-Type Track Adapter		35K 3500K	SPW SpectralWhite (3000K & 3500K only)		FL	Flood	WH	White
	HTYPE H-Type Track Adapter		40K 4000K			WFL	Wide Flood		
	LTYPE L-Type Track Adapter								

Accessories

For Fixtures	T252L
Color Filters	CGF 200
Dichroic Filters	DGF 200
Dichroic Color Correction Filters	DCCF 200
Diffusion Lens	DIFF 200
Uniformity Lens	SOLITE 200
UV Filter	UVF 200
Prismatic Spread Lens	PRISM 200
Linear Spread Lens	LSPREAD 200
Hexcell Louver	HCLBL 200
Snoot	SNOOTBL 200

Note: Wide flood versions do not accept accessories.

T252L Extension Wands



Catalog #	Finish	Overall Length
TWLED 12IN WH	White	13 1/2"
TWLED 12IN BL	Black	
TWLED 12IN SL	Silver	
TWLED 18IN WH	White	19 1/2"
TWLED 18IN BL	Black	
TWLED 18IN SL	Silver	
TWLED 24IN WH	White	25 1/2"
TWLED 24IN BL	Black	
TWLED 24IN SL	Silver	
TWLED 36IN WH	White	37 1/2"
TWLED 36IN BL	Black	
TWLED 36IN SL	Silver	
TWLED 48IN WH	White	49 1/2"
TWLED 48IN BL	Black	
TWLED 48IN SL	Silver	

Trac-Master® | LED Series

15W Cylindra™ LED




Cylindra™ T254L

At up to 1598 lumens, the T254L Cylindra LED approximates the light output and distribution of 90W PAR30 halogen lamps, utilizing less than 20% of the energy and having a rated life of 50,000 hours. The contemporary styling of the Cylindra LED enables it to subtly enhance practically any decor without diverting attention from the surrounding environment. Soft curved surfaces combine with clean, crisp edges to provide a uniquely attractive aesthetic. Cylindra's integral, bayonet-mount accessory holder accommodates up to two light control accessories if desired.



Dimensions



Ordering Information

Ordering Example: T254L G2 27K 90CRI PDIM SP BL

Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T254L 15W Cylindra LED	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI	PDIM Phase Dimmable	SP Spot	BL Black
	GTYPE G-Type Track Adapter		30K 3000K	90CRI 90 CRI		NFL Narrow Flood	SL Silver
	HTYPE H-Type Track Adapter		35K 3500K	SPW¹ SpectralWhite		FL Flood	WH White
	LTYPE L-Type Track Adapter		40K 4000K				
	TEK TEK 120V Track Adapter						
	CPY² Canopy Mounted						

¹ 3000K and 3500K only. ² CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T254L
Color Filters	CGF 375
Dichroic Filters	DGF 375
Diffusion Lens	DIFF 375
Uniformity Lens	SOLITE 375
UV Filter	UVF 375
Prismatic Spread Lens	PRISM 375
Linear Spread Lens	LSPREAD 375
Hexcell Louver	HCLBL 375
Cube Cell Louver	CCLBL 375
Snoot	SNOOTBL 375
Barn Doors	TBDR BLCK 375



Sony Easton Store (Mark Steele Photography)

Trac-Master® | LED Series

36W Cylindra™ LED




Cylindra™ T255L

At up to 3947 lumens, the T255L Cylindra LED track fixture approximates the light output and distribution of 70W PAR30L ceramic metal halide lamps, consuming less than half the energy, but having a rated life of 50,000 hours and significantly better lumen maintenance over life. The contemporary styling of the Cylindra LED enables it to subtly enhance practically any decor without diverting attention from the surrounding environment. Soft curved surfaces combine with clean, crisp edges to provide a uniquely attractive aesthetic. Cylindra's integral, bayonet-mount accessory holder accommodates up to two accessories if desired.



Dimensions

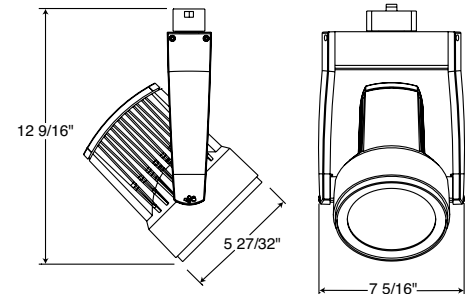

Ordering Information

Ordering Example: T255L G3 27K 80CRI PDIM NFL WH

Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
T255L 36W Cylindra LED	(Blank) Juno Universal 120V Track Adapter	G3 Generation 3	27K 2700K	80CRI 80 CRI 90CRI 90 CRI SPW ² SpectralWhite	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP 10° Spot NFL Narrow Flood FL Flood	BL Black SL Silver WH White
	HTEK ¹ HTEK 277V Track Adapter		30K 3000K				
	TEK TEK 120V Track Adapter		35K 3500K				
	HTYPE H-Type Track Adapter		40K 4000K				
	LTYPE L-Type Track Adapter						

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² 3000K and 3500K only.

Accessories

For Fixtures	T255L
Color Filters	CGF 469
Dichroic Filters	DGF 469
Diffusion Lens	DIFF 469
Uniformity Lens	SOLITE 469
UV Filter	UVF 469
Prismatic Spread Lens	PRISM 469
Linear Spread Lens	LSPREAD 469
Hexcell Louver	HCLBL 469
Cube Cell Louver	CCLBL 469
Shoot	SNOOTBL 469
Barn Doors	TBDR BLCK 469

Trac-Master® | LED Series


26W, 36W, & 43W Integral Driver Flat Back Cylinder LED

Flat Back Cylinder T283L, T285L, & T286L

With its integral driver, the cylindrical aesthetic of the Integral Driver Flat Back Cylinder Series offers the simplest of form factors. It is designed with a unique, patented, precision optical system which produces the most perfectly uniform spot, narrow flood or flood beam distributions. The 26W T283L Series can deliver up to 3003 lumens, the 36W T285L Series can deliver up to 3636 lumens, and the 43W T286L Series can deliver up to 3900 lumens, each consuming less than 1/3 of the energy of halogen equivalents and having a rated life of 50,000 hours. An optional field-installed accessory holder, snoot or barn doors can accommodate up to 2 accessories if desired.



Dimensions

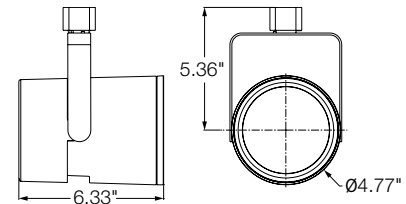

Ordering Information				Ordering Example: T283L G2 27K 80CRI PDIM NFL WH				
Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish	
T283L 26W Integral Driver Flat Back Cylinder LED	(Blank) Juno Universal 120V Track Adapter	G2³ Generation 2	27K 2700K	80CRI 80 CRI	OFF¹ On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot	BL Black	
T285L 36W Integral Driver Flat Back Cylinder LED	HTEK^{1x} HTEK 277V Track Adapter		30K 3000K	90CRI 90 CRI		NFL Narrow Flood	SL Silver	
T286L 43W Integral Driver Flat Back Cylinder LED	TEK TEK 120V Track Adapter		35K 3500K	SPW² Spectral White		FL Flood	WH White	
	GTYPE G-Type Track Adapter		40K 4000K					
	HTYPE H-Type Track Adapter							
	LTYPE L-Type Track Adapter							
	CPY³ Canopy Mounted							

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only. ² 3000K and 3500K only, T283L and T285L only.

³ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T283L, T285L, T286L
Dual Accessory Holder	T770BL, WH
Color Filters	CGF 469*
Dichroic Filters	DGF 469*
Diffusion Lens	DIFF 469*
Uniformity Lens	SOLITE 469*
UV Filter	UVF 469*
Prismatic Spread Lens	PRISM 469*
Linear Spread Lens	LSPREAD 469*
Hexcell Louver	HCLBL 469*
Cube Cell Louver	CCLBL 469*
Snoot	T5788BL 469
Barn Doors	T5774BL 469

* Accessory Holder, Snoot or Barn Doors required to install filters or lenses; Accessory Holder or Snoot required to install louver.

Trac-Master® | LED Series

9W & 15W Arc™ LED




Arc™ T271L & Arc™ L T272L

The ultra-efficient optical system of the Arc LED track fixture maximizes efficiency while minimizing fixture depth, yielding a unique and attractive aesthetic. It approximates the light output and distribution of 60-75W PAR30 halogen lamps, utilizing about 20% of the energy and having a rated life of 50,000 hours. The T271L delivers up to 1158 lumens, while the T272L delivers up to 1749 lumens, yielding efficacies in excess of 120 lumens per watt. A variety of accessories are available to customize fixture performance. The Arc LED is available with or without louver to optimize visual cutoff; there is also a louver accessory that can be added at a later time if desired.



Louvered Version

Dimensions

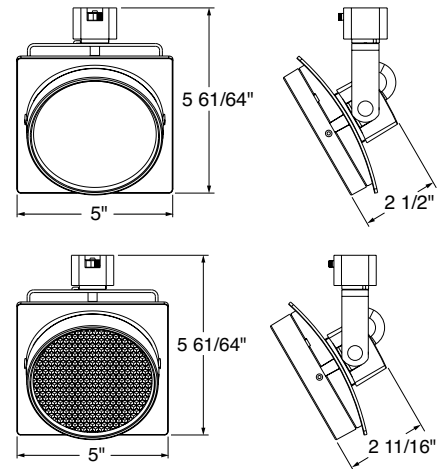

Ordering Information

Ordering Example: T271L G2 27K 80CRI PDIM SP WH THCL1WH


Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish	Factory Installed Louvers
T271L 9W Arc LED	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI	PDIM Phase Dimmable	SP Spot NFL Narrow Flood	BL Black SL Silver WH White	THCL1BL Black
T272L 15W Arc L LED	TEK TEK 120V Track Adapter		30K 3000K	90CRI 90 CRI				THCL1SL Silver
	GTYPE G-Type Track Adapter		35K 3500K	SPW¹ SpectralWhite				THCL1WH White
	HTYPE H-Type Track Adapter		40K 4000K					
	LTYPE L-Type Track Adapter							

¹ 3000K and 3500K only.

Accessories

For Fixtures	T271L, T272L	For Fixtures	T271L, T272L
Color Filters	CGF 469*	Prismatic Spread Lens	PRISM 469*
Dichroic Filters	DGF 469*	Linear Spread Lens	LSPREAD 469*
Diffusion Lens	DIFF 469*	Hexcell Louver Assembly	THCL1BL, SL, WH
Uniformity Lens	SOLITE 469*	Barn Doors	TBDR BLCK 440
UV Filter	UVF 469*		

* Filters, lenses, eyebrow and cross baffle require barn doors for installation.

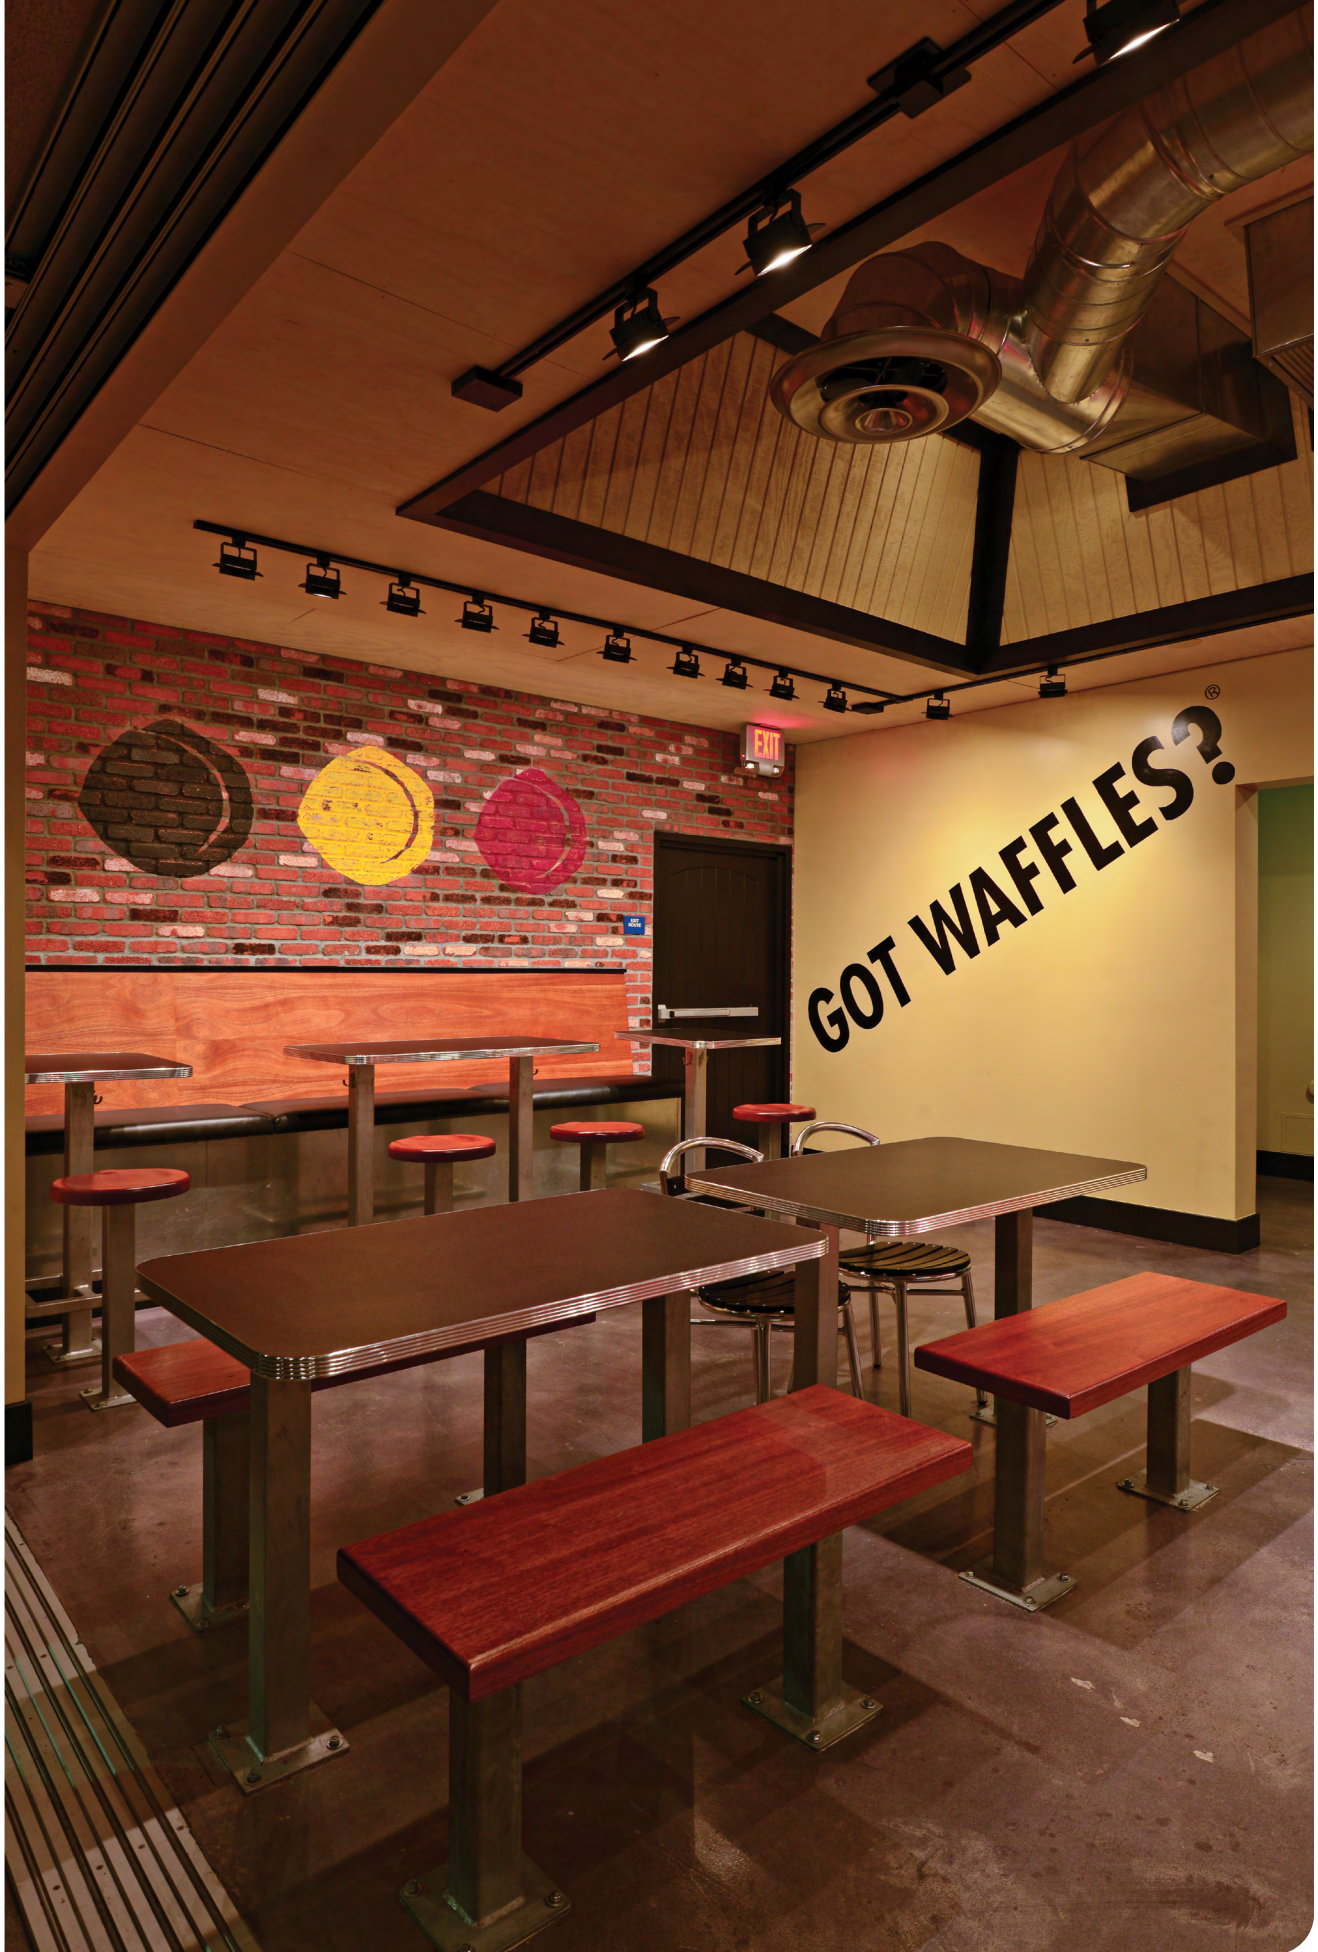

GOT WAFFLES?

Trac-Master® | LED Series

12W, 16W, 22W, 26W & 30W Narrow Profile LED Wall Wash




Narrow Profile Wall Wash/Flood T1050L, T1051L, T1052L, T1053L, & T1054L

By employing a patented, proprietary hyperbolic reflector, the T105xL Narrow Profile LED Wall Wash/Flood track fixture family delivers a powerful and uniform punch of light, with minimal aperture brightness, achieving efficacy of up to 148 lumens per watt. Their unique, narrow profile and small footprint reduces visual clutter at the ceiling. The lightweight, but robust, die cast aluminum construction is designed to maintain a consistent center of gravity, regardless of aiming or rotation. Vertical aiming locks enable fixtures to be precisely aimed and locked in place, and a variety of light control accessories can be attached to optimize beam control. They can even be aimed straight down and used for ambient illumination. Their optimized thermal management design yields a maintenance-free minimum 50,000 hours service life at 70% lumen maintenance.



Dimensions

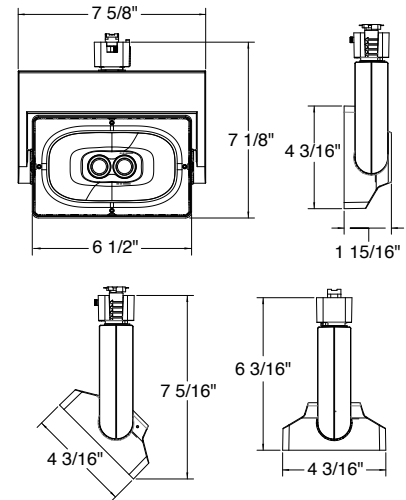

Ordering Information

Ordering Example: T1054L 30K 80CRI PDIM WH

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility	Finish	Factory-Installed Lens Option
T1050L 12W LED 1700 Lumens Wall Wash	(Blank) Juno Universal 120V Track Adapter	27K 2700K 30K 3000K 35K 3500K 40K 4000K	80CRI 80 CRI 90CRI 90 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	BL Black SL Silver WH White	CPL Clear Polycarbonate Lens DIFF Diffusion Lens
T1051L 16W LED 2300 Lumens Wall Wash	HTEK ¹ HTEK 277V Track Adapter					
T1052L 22W LED 3200 Lumens Wall Wash	TEK TEK 120V Track Adapter					
T1053L 26W LED 3700 Lumens Wall Wash	GTYPE G-Type Track Adapter					
T1054L 30W LED 4200 Lumens Wall Wash	HTYPE H-Type Track Adapter					
	LTYPE L-Type Track Adapter					
	CPY ² Canopy Mounted					

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only.

² CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T1050L, T1051L, T1052L, T1053L, T1054L		
Hexagonal Cell Louver	HCLBL RECT3	Snoot - Black	SNOOTBL RECT3
Clear Polycarbonate Lens	CGF RECT3 CLEAR	Eyebrow - Black	EYEBROWBL RECT3
Diffusion Lens	DIFF RECT3	Eyebrow - White	EYEBROWH RECT3
UV Filter	UVF RECT3	Barn Door - Black	TBDR BLCK RECT3

Trac-Master® | LED Series

38W & 45W Narrow Profile LED Wall Wash




Narrow Profile Wall Wash/Flood T1056L & T1058L

By employing a patented, proprietary hyperbolic reflector, the T105xL Narrow Profile LED Wall Wash/Flood track fixture family delivers a powerful and uniform punch of light, with minimal aperture brightness, achieving efficacy of up to 148 lumens per watt. Their unique, narrow profile and small footprint reduces visual clutter at the ceiling. The lightweight, but robust, die cast aluminum construction is designed to maintain a consistent center of gravity, regardless of aiming or rotation. Vertical aiming locks enable fixtures to be precisely aimed and locked in place, and a variety of light control accessories can be attached to optimize beam control. They can even be aimed straight down and used for ambient illumination. Their optimized thermal management design yields a maintenance-free minimum 50,000 hours service life at 70% lumen maintenance.



Dimensions

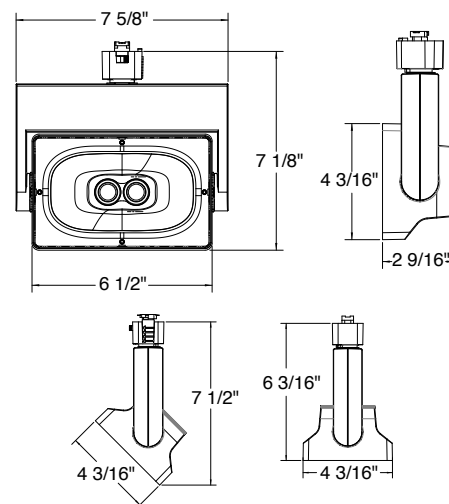

Ordering Information

Ordering Example: T1056L HTYPE 35K 80CRI PDIM BL

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility	Finish	Factory-Installed Lens Option
T1056L 38W LED 5200 Lumens Wall Wash	(Blank) Juno Universal 120V Track Adapter	27K 2700K 30K 3000K 35K 3500K 40K 4000K	80CRI 80 CRI 90CRI 90 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	BL Black SL Silver WH White	CPL Clear Polycarbonate Lens DIFF Diffusion Lens
T1058L 45W LED 6300 Lumens Wall Wash	HTEK ¹ HTEK 277V Track Adapter TEK TEK 120V Track Adapter GTYPE G-Type Track Adapter HTYPE H-Type Track Adapter LTYPE L-Type Track Adapter CPY ² Canopy Mounted					

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only.

² CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	T1050L, T1051L, T1052L, T1053L, T1054L		
Hexagonal Cell Louver	HCLBL RECT3	Snoot - Black	SNOOTBL RECT3
Clear Polycarbonate Lens	CGF RECT3 CLEAR	Eyebrow - Black	EYEBROWBL RECT3
Diffusion Lens	DIFF RECT3	Eyebrow - White	EYEBROWH RECT3
UV Filter	UVF RECT3	Barn Door - Black	TBDR BLCK RECT3

Trac-Master® | LED Series

35W LED Wall Wash/Flood




Description

The 35W T256L wall wash/flood track fixture delivers a powerful and uniform punch of light, utilizing less energy than a similar CMH fixture and offering up to 4 times the rated life. Its sleek, shallow profile enables it to virtually blend in with the track. Operating at only 35W, it is able to deliver up to 2223 lumens, yielding an efficacy of up to 64 lumens per watt. Its unique thermal management design yields a maintenance-free 50,000 hours service life at 70% lumen maintenance.

Features

- Custom designed concealed heat sink provides outstanding thermal management, yielding 70% average lumen maintenance at 50,000 hours of operation
- Textured paint available in white, black or silver finishes
- High efficacy LEDs provide outstanding reliability, performance and color quality/consistency
- High CRI of 80 minimum
- Driver is concealed in housing to minimize overall fixture footprint
- Standard versions are dimming-compatible
- 90° vertical aiming capability
- Two position power contact provided for two-circuit track application
- UL and cUL Listed

Dimensions

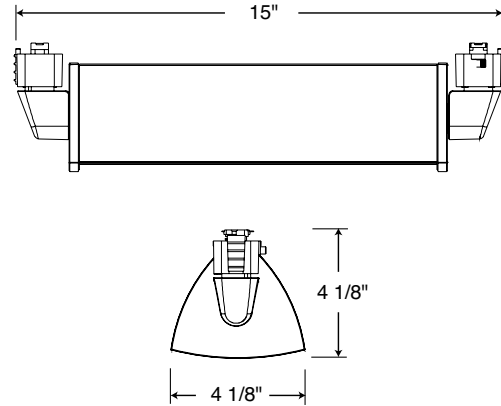

Ordering Information

Ordering Examples: T256L 30K 80CRI OFF WH, T256L TEK 30K 80CRI PDIM BL

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility	Finish
T256L 35W LED Wall Wash/Flood	(Blank) Juno Universal 120V Track Adapter TEK TEK 120V Track Adapter HTEK¹ HTEK 277V Track Adapter HTYPE H-Type Track Adapter	27K 2700K 30K 3000K 35K 3500K 40K 4000K	80CRI 80 CRI	OFF¹ On/Off (Non-Dimming) PDIM Phase Dimmable	BL Black SL Silver WH White

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only.

Trac-Master® | LED Series

70W LED Wall Wash/Flood




Description

The 70W T257L wall wash/flood track fixture delivers a powerful and uniform punch of light, utilizing less energy than a similar CMH fixture and offering up to 4 times the rated life. Its sleek, shallow profile enables it to virtually blend in with the track. Operating at only 70W, it is able to deliver up to 4467 lumens, yielding an efficacy of up to 64 lumens per watt. Its unique thermal management design yields a maintenance-free 50,000 hours service life at 70% lumen maintenance.

Features

- Custom designed concealed heat sink provides outstanding thermal management, yielding 70% average lumen maintenance at 50,000 hours of operation
- Textured paint available in white, black or silver finishes
- High efficacy LEDs provide outstanding reliability, performance and color quality/consistency
- High CRI of 80 minimum
- Driver is concealed in housing to minimize overall fixture footprint
- Standard versions are dimming-compatible
- 90° vertical aiming capability
- Two position power contact provided for two-circuit track application
- UL and cUL listed

Dimensions

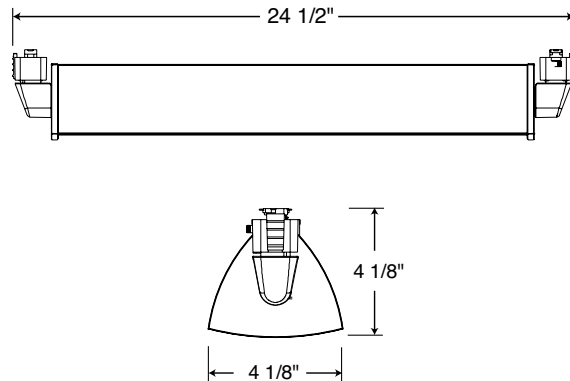

Ordering Information

Ordering Examples: T257L 30K 80CRI PDIM WH, T257L TEK 30K 80CRI PDIM BL

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility	Finish
T257L 70W Wall Wash/Flood LED	(Blank) Juno Universal 120V Track Adapter	27K 2700K	80CRI 80 CRI	OFF ¹ On/Off (Non-Dimming) PDIM Phase Dimmable	BL Black
	HTEK ¹ HTEK 277V Track Adapter	30K 3000K			SL Silver
	TEK TEK 120V Track Adapter	35K 3500K			WH White
	HTYPE H-Type Track Adapter	40K 4000K			

¹ HTEK versions available with OFF option only, and OFF option available with HTEK version only.

Trac-Master® | Gimbal Ring Series

Die Cast Gimbal Ring Lampholders



T1020, T1030, T1031S and T1038

The Die Cast Gimbal Ring fixture series offers premium construction features and extensive lamp flexibility. The narrow, arched yoke minimizes the fixture mass and gives it a fresh, modern appearance. It is designed to accommodate halogen PAR lamps as well as the latest technology LED lamps. Its robust design is mostly open, allowing air circulation which enables LED lamps to operate as cool as possible. Each version has a high wattage and low wattage labeling option to further facilitate energy code compliance. The Die Cast Gimbal Ring fixture series has a front-loading design making lamp changes a breeze. Each fixture possesses a tri-lobe locking knob to prevent the fixture from “drooping” over time due to lamp weight and to enable the fixture aiming to be locked in place, even during lamp changes.



Catalog

Finish

Lamp

Dimensions

High Wattage PAR20 E26 Medium Base Lamp

T1020 E26 50W BL Black 50W max. PAR20

T1020 E26 50W SL Silver


T1020 E26 50W WH White

Low Wattage PAR20 E26 Medium Base Lamp

T1020 E26 10W BL Black 10W max. PAR20

T1020 E26 10W SL Silver

T1020 E26 10W WH White



Catalog

Finish

Lamp

Dimensions

High Wattage PAR30L E26 Medium Base Lamp

T1030 E26 75W BL Black 75W max. PAR30L

T1030 E26 75W SL Silver


T1030 E26 75W WH White

Low Wattage PAR30L E26 Medium Base Lamp

T1030 E26 18W BL Black 18W max. PAR30L

T1030 E26 18W SL Silver

T1030 E26 18W WH White



Catalog

Finish

Lamp

Dimensions

High Wattage PAR30S E26 Medium Base Lamp

T1031S E26 75W BL Black 75W max. PAR30S

T1031S E26 75W SL Silver


T1031S E26 75W WH White

Low Wattage PAR30S E26 Medium Base Lamp

T1031S E26 18W BL Black 18W max. PAR30S

T1031S E26 18W SL Silver

T1031S E26 18W WH White




Trac-Master® | Gimbal Ring Series

Die Cast Gimbal Ring Lampholders



Catalog #	Finish	Lamp
High Wattage PAR38 E26 Medium Base Lamp		
T1038 E26 150W BL	Black	150W max. PAR38
T1038 E26 150W SL	Silver	
T1038 E26 150W WH	White	
Low Wattage PAR38 E26 Medium Base Lamp		
T1038 E26 25W BL	Black	25W max. PAR38
T1038 E26 25W SL	Silver	
T1038 E26 25W WH	White	

Dimensions



Note: T1020, T1030, T1031S and T1038 are available with TEK, GTYPE, HTYPE and LTYPE Alternate Mounting Adapters-- see specification sheet for details.

Accessories

For Fixtures	T1030, T1031S	T1038
Accessory Ring	TAH BLCK 469	TAH BLCK 550
Color Filters	CGF 469*	CGF 550*
Dichroic Filters	DGF 469*	—
Diffusion Lens	DIFF 469*	—
Uniformity Lens	SOLITE 469*	—
UV Filter	UVF 469*	—
Prismatic Spread Lens	PRISM 469*	—
Linear Spread Lens	LSPREAD 469*	—
Hexcell Louver	HCLBL 469*	—
Cube Cell Louver	CCLBL 469*	CCLBL 550*
Snoot	SNOOTBL 469*	—

* Filters, lenses, louver, cross baffle, eyebrow and snoot require accessory ring for installation.

Trac-Master® | Low Voltage

MR16 LED-Compatible Lampholders

T1040

T1040 low voltage fixtures offer both mechanical and electrical compatibility with most MR16 LED lamps (by others). Constructed with an open design, this series provides for improved airflow around the lamp, leading to better cooling and optimized LED lamp life. They may also be used with MR16 halogen lamps with integral cover glass. The fixture is designed with an integral transformer housing which is centered above the lampholder, offering a new and unique aesthetic in a small, close-to-the-track fixture footprint. T1040 fixtures are dimming-compatible (with dimmable lamps) – contact lamp manufacturer to confirm full compatibility.



Lily16

Catalog

T1040 H WH
T1040 H BL


Finish

White
Black

Lamp

12V, 50W max. MR16CG Cover Glass

Dimensions



Note: T1040 is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.

Trac-Master® | Professional Halogen Series

Cylindra™ Low Voltage

Cylindra™ Low Voltage

Applying a new twist to a traditional design, the Cylindra Series offers a unique, contemporary aesthetic based on a step cylinder fixture platform. Gentle arcs elegantly blend with bold edges to provide a unique yet timeless visual appeal. Each Cylindra fixture is supplied with an integral bayonet-mount media cartridge that is designed to simultaneously accept up to two light control accessories.



Catalog

T841 WH
T841 BL


Finish

White
Black

Lamp

12V, 50W max. MR16

Dimensions



T537 Transformer required. Must order separately.
See Low Voltage Transformers section for detailed information.

Accessories

For Fixtures	T841
Color Filters	CGF 200
Dichroic Filters	DGF 200
Dichroic Color Correction Filters	DCCF 200
Diffusion Lens	DIFF 200
Uniformity Lens	SOLITE 200
UV Filter	UVF 200
Prismatic Spread Lens	PRISM 200
Linear Spread Lens	LSPREAD 200
Hexcell Louver	HCLBL 200
Snoot	SNOOTBL 200

T841 Extension Wands



Catalog #	Finish	Overall Length
TWL12 12IN WH	White	13 1/2"
TWL12 12IN BL	Black	
TWL12 18IN WH	White	19 1/2"
TWL12 18IN BL	Black	
TWL12 24IN WH	White	25 1/2"
TWL12 24IN BL	Black	
TWL12 36IN WH	White	37 1/2"
TWL12 36IN BL	Black	
TWL12 48IN WH	White	49 1/2"
TWL12 48IN BL	Black	

Trac-Master® | Designer Series

Close-Ups



Close-Ups

As the name implies, this compact, stylish lampholder hugs close to the track for minimum intrusion into a space. The softly sculpted back detail and metal shades are welcome design refinements for many interiors.



PAR30 - Open

	Catalog #	Finish	Lamp	Dimensions
	T230 WH	White	75W max. PAR30	

PAR30 - Enclosed

	Catalog #	Finish	Lamp	Dimensions
	T231 WH T231 BL	White Black	75W max. PAR30	

PAR38 - Enclosed

	Catalog #	Finish	Lamp	Dimensions
	T239 WH T239 BL	White Black	120W max. PAR38	

Trac-Master® | Classic Series

Open Back Gimbals

Open Back Gimbals

Gimbal rings are ever popular due to their long-standing use as an economical, general-purpose track lampholder.



Catalog

T368 WH
T368 BL


Finish

White
Black

Lamp

150W max. PAR38

Dimensions



Accessories







For Fixtures	T368
Color Filters	CGF 469
Dichroic Filters	DGF 469
Diffusion Lens	DIFF 469
Uniformity Lens	SOLITE 469
UV Filter	UVF 469
Prismatic Spread Lens	PRISM 469
Linear Spread Lens	LSPREAD 469
Hexcell Louver	HCLBL 469
Cube Cell Louver	CCLBL 469
Snoot	SNOOTBL 469

Trac-Master® | Classic Series

Front Lamping Gimbals

Front Lamping Gimbals

A Juno innovation, the front-loading gimbal ring combines the practicality, versatility and economy of traditional gimbal ring track fixtures with a fixed socket housing to allow simplified front relamping.

	Catalog # T687 BL	Finish Black	Lamp 50W max. PAR20	Dimensions 
	Catalog # T689 WH T689 BL	Finish White Black	Lamp 75W max. PAR30	Dimensions 
	Catalog # T690 WH T690 BL T690 SL	Finish White Black Silver	Lamp 250W max. PAR38	Dimensions 







Note: T690 BL is available with TEK, GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.

Trac-Master® | Classic Series

Universals

Universals

These economical, universal lampholders accept a wide range of wattages and sizes of popular halogen PAR and incandescent R/BR lamps.

	Catalog # T308 WH T308 BL	Finish White Black	Lamp 50W max. R20/ 50W max. PAR20/ 85W max. BR30/ 75W max. PAR30/ 120W max. BR40/ 150W max. PAR38	Dimensions 
	Catalog # T620 WH T620 BL	Finish White Black	Lamp 50W max. R20/ 50W max. PAR20/ 85W max. BR30/ 75W max. PAR30/ 120W max. BR40/ 150W max. PAR38	Dimensions 
	Catalog # T691 WH T691 BL T691 NAT	Finish White Black Natural	Lamp 60W max. PAR16/ 50W max. PAR20/ 75W max. PAR30/ 150W max. PAR38	Dimensions 

Notes:

T691 WH is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.

The Natural (NAT) finish is merely a raw finish with a clear protective coating applied—inconsistencies, scratches, and minor processing marks are part of the unique aesthetic created by this process and should be expected.

Trac-Master® | Classic Series

Flat Back Cylinders

Flat Back Cylinders

These long-standing traditional lampholders accept both halogen PAR and incandescent R/BR lamps and provide deep lamp shielding.




Catalog #
T313 WHB WH
T313 BLB BL

Finish
White/White Baffle
Black/Black Baffle

Lamp
50W max. R20/
50W max. PAR20

Dimensions




Catalog #
T315 BLB BL

Finish
Black/Black Baffle

Lamp
75W max. BR30/
75W max. PAR30L

Dimensions



Accessories

For Fixtures	T313	T315
Accessory Holder	T560BL	-
Color Filters	CGF 375*	CGF 469*
Dichroic Filters	DGF 375*	DGF 469*
Diffusion Lens	DIFF 375*	DIFF 469*
Uniformity Lens	SOLITE 375*	SOLITE 469*
UV Filter	UVF 375*	UVF 469*
Prismatic Spread Lens	PRISM 375*	PRISM 469*
Linear Spread Lens	LSPREAD 375*	LSPREAD 469*
Hexcell Louver	HCLBL 375*	HCLBL 469*
Cube Cell Louver	CCLBL 375*	CCLBL 469*
Snoot	SNOOTBL 375*	SNOOTBL 469*
Barn Doors	T71BL 375	T72BL 469

* Filters, lenses and louver require accessory holder or barn doors for installation.



Low voltage fixtures are one of the most widely used tools to create effective, dramatic accent lighting. Most of the Juno offering of low voltage fixtures is presented in this section for ease of selection, many of which are compatible with state-of-the-art LED lamps.

Precise Beam Control

Low voltage lamps are available in a wide variety of precise beam patterns from pin-spots to wide floods. Combined with lens accessories, an infinite range of exacting effects is possible.

Crisp, White Light

The point source and white-light characteristics of low voltage lamps render the color and dimension of objects with exceptional clarity.

Miniature Size

Low voltage lamps, and the fixtures that house them, are of a small scale that can integrate more unobtrusively into lighting designs.

Energy Efficiency

Low voltage lamps produce substantially more usable accent lighting per watt of energy as compared with line voltage halogen sources. Due to their miniature size, they often can be positioned closer to an object being illuminated, thus requiring less wattage to create the desired effect. MR16 LED lamps, with their even higher efficacies and longer service life, offer a very attractive alternative to halogen MR16s.

Cool Beam

MR16 halogen lamps are commonly available with dichroic reflector coatings that allow the infrared energy to pass out the back of the lamp, projecting mostly visible light forward. LED lamps have no forward projected heat. Each of these lamp types reduces the projected heat on objects and people in a space.

Long Life

The compact filament of low voltage halogen lamps is very rugged and results in lamp life up to 6000 hours. Low voltage LED lamps typically provide a rated life of 15,000 to 35,000 hours, with some providing up to 50,000 hours, effectively eliminating lamp maintenance in many applications.

Juno High-Quality Electronic Transformers

Juno low voltage electronic transformers are designed to provide 40,000-hour life minimum, even in higher 40-degree centigrade elevated ambient temperatures. They are FCC certified to the highest noise limiting standards to minimize the potential for radio interference and provide quiet operation even when dimmed. Juno offers universal LED-compatible transformers for applications that use LED lamps.

Trac-Master® | Low Voltage

MR16 LED-Compatible Lampholders

T1040

T1040 low voltage fixtures offer both mechanical and electrical compatibility with most MR16 LED lamps (by others). Constructed with an open design, this series provides for improved airflow around the lamp, leading to better cooling and optimized LED lamp life. They may also be used with MR16 halogen lamps with integral cover glass. The fixture is designed with an integral transformer housing which is centered above the lampholder, offering a new and unique aesthetic in a small, close-to-the-track fixture footprint. T1040 fixtures are dimming-compatible (with dimmable lamps) – contact lamp manufacturer to confirm full compatibility.



Lily16

Catalog

T1040 H WH
T1040 H BL


Finish

White
Black

Lamp

12V, 50W max. MR16CG Cover Glass

Dimensions



Note: T1040 is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.

Trac-Master® | Low Voltage

Cylindra™

Cylindra™

Applying a new twist to a traditional design, Cylindra Series offers a unique, contemporary aesthetic based on a step cylinder fixture platform. Gentle arcs elegantly blend with bold edges to provide a unique yet timeless visual appeal. The Cylindra low voltage is designed to use 50W max. MR16 lamps. Each Cylindra fixture is supplied with an integral bayonet-mount media cartridge that is designed to simultaneously accept up to two light control accessories.



Catalog

T841 WH

T841 BL

Finish


White

Black

Lamp

12V, 50W max. MR16

Dimensions



T537 Transformer required. Must order separately.
See Low Voltage Transformers section for detailed information.

Accessories

For Fixtures	T841
Color Filters	CGF 200
Dichroic Filters	DGF 200
Dichroic Color Correction Filters	DCCF 200
Diffusion Lens	DIFF 200
Uniformity Lens	SOLITE 200
UV Filter	UVF 200
Prismatic Spread Lens	PRISM 200
Linear Spread Lens	LSPREAD 200
Hexcell Louver	HCLBL 200
Snoot	SNOOTBL 200

T841 Extension Wands




Catalog #	Finish	Overall Length
TWL12 12IN WH	White	13 1/2"
TWL12 12IN BL	Black	
TWL12 18IN WH	White	19 1/2"
TWL12 18IN BL	Black	
TWL12 24IN WH	White	25 1/2"
TWL12 24IN BL	Black	
TWL12 36IN WH	White	37 1/2"
TWL12 36IN BL	Black	
TWL12 48IN WH	White	49 1/2"
TWL12 48IN BL	Black	

Trac-Master® System


Track Sections

- Extruded aluminum channels for strength and rigidity.
- Low profile minimizes visual ceiling intrusion.
- 12-gauge solid copper conductors.
- Available in a variety of finishes: white, black or silver
- Extruded thermoplastic insulator features dimensional and thermal stability, plus excellent insulating properties.
- Debossed visual polarity line indicates the positive conductor (+) side of the track.



Track Connectors

Juno Trac “push-in” connectors mechanically and electrically join track sections together, thereby eliminating the need for splices and greatly simplifying installation.

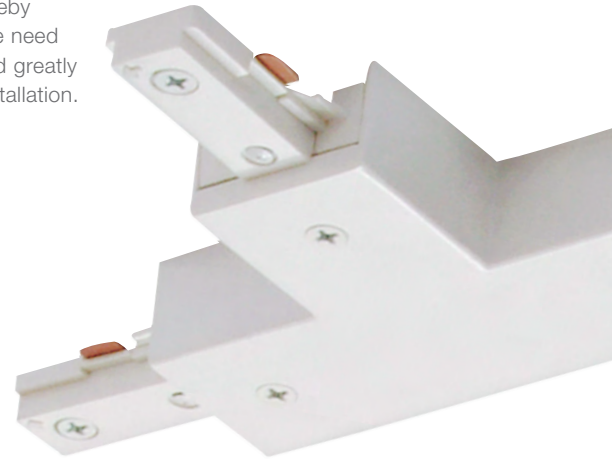

One-Circuit Track

Two-Circuit Track

Key Features of Juno Track Connectors

- Embossed polarity arrows indicate correct insertion position.
- Mechanical polarity assures proper electrical connection.
- Screw terminals simplify wiring.
- Spring-loaded copper alloy contacts provide excellent electrical conductivity.
- Polycarbonate cover construction provides strength, insulation and permanent color.

Safe and simple installation is what you can expect from Juno one-circuit and two-circuit track systems. All are engineered and manufactured using the latest technology, assuring the highest possible quality.




Polarity

Mechanical polarity is standard on all Juno Trac-Master components, thus simplifying installation and assuring correct electrical connection. Each track section has a debossed polarity line that indicates the positive conductor side. Both the connectors and the track fixtures have indicator arrows designed to point to the track polarity line when installed properly. The system is virtually foolproof.

The Super Adapter

The standard Juno Super Adapter permits Juno Trac fixtures to be used on one-circuit or two-circuit track systems.

Key Features of Juno Super Adapter

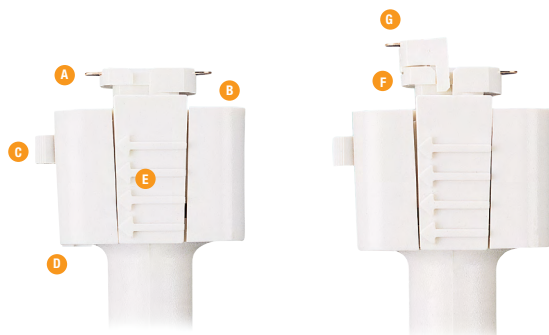

- A** Copper alloy contacts provide the best possible electrical conductivity and precise spring action; prevents arcing and will not take a set.
- B** True, positive electrical ground.
- C** On/off switch included on all Trac-Master fixtures with Super Adapter.
- D** Patented, embossed polarity arrows on bottom of adapter.
- E** Spring-loaded positive latch with embossed polarity arrows secures track fixture to track.
- F** Raise contact to "up" position for two-circuit installation.
- G** Upper-circuit contact support assures proper contact with line conductor.

Trac-Master® | Track System Components

One-Circuit System



Description

One-Circuit Trac-Master® sections are available as surface mounted track or may be suspended from ceiling with pendant accessories listed in One-Circuit System Pendant Mounting Accessories section.

Features

- Trac-Lites track is compatible with both Trac-Lites & Trac-Master fixtures
- Extruded aluminum channel
- Extruded thermoplastic insulator
- Debossed polarity line
- 12-gauge solid copper conductors
- Concealed wireway on top of track section
- 20 amp capacity
- UL Listed, CSA Certified
- Can be cut to custom length by installer


Surface Track

Includes dead-end and mounting hardware.



Catalog #	Finish	Description
T 2FT WH	White	2' One-Circuit Track (actual length 19 7/8")
T 2FT BL	Black	
T 2FT SL	Silver	
T 4FT WH	White	4' One-Circuit Track (actual length 43 7/8")
T 4FT BL	Black	
T 4FT SL	Silver	
T 6FT WH	White	6' One-Circuit Track (actual length 67 7/8")
T 6FT BL	Black	
T 6FT SL	Silver	
T 8FT WH	White	8' One-Circuit Track (actual length 91 7/8")
T 8FT BL	Black	
T 8FT SL	Silver	
T 12FT WH	White	12' One-Circuit Track (actual length 139 7/8")
T 12FT BL	Black	
T 12FT SL	Silver	

Dimensions



Dead End



Track Dead End

Catalog #	Finish	Description
T28 WH	White	<ul style="list-style-type: none"> • Track Dead End for use on Juno Trac-Master one-circuit track system field-cut sections.
T28 BL	Black	
T28 SL	Silver	



Electrical End Feeds



End Feed Connector and Outlet Box Cover

Catalog #	Finish	Description
T21 WH	White	<ul style="list-style-type: none"> • For outlet box feed • Includes outlet cover, fixture
T21 BL	Black	
T21 SL	Silver	
T21 RP WH	White	<ul style="list-style-type: none"> • Same as above except designed for use in opposite polarity orientation compared to standard feed connectors • See specification sheets for more details
T21 RP BL	Black	
T21 RP SL	Silver	



Dimensions





Trac-Master® | Track System Components



One-Circuit System



Electrical End Feeds (cont)

 <p>Conduit Adapter</p>	Catalog #	Finish	Description	Dimensions
	T34 WH	White	• For surface wiring	
	T34 BL	Black	• Accepts standard 1/2" connector	
	T34 SL	Silver		
	T34 RP WH	White	• Same as above except designed for use in opposite polarity orientation compared to standard adapters	
	T34 RP BL	Black	• See specification sheets for more details	
	T34 RP SL	Silver		



 <p>T-Bar End Feed</p>	Catalog #	Finish	Description	Dimensions
	T36 WH	White	• Wiring compartment contains standard 1/2" KO's	
	T36 BL	Black	• Feeds surface track from above when 15/16" T-bar is directly above track	
	T36 SL	Silver		
	T36 RP WH	White	• Same as above except designed for use in opposite polarity orientation compared to standard feeds	
	T36 RP BL	Black	• See specification sheets for more details	
	T36 RP SL	Silver		

The product and system may be covered by the following United States patent: U5,259,774



 <p>End Feed Connector</p>	Catalog #	Finish	Description	Dimensions
	T38 WH	White	• Feed track from above with flexible conduit, BX, etc., or end feed in pendant systems	
	T38 BL	Black	• Accepts standard 1/2" connector	
	T38 SL	Silver		
	T38 RP WH	White	• Same as above except designed for use in opposite polarity orientation compared to standard feed connectors	
	T38 RP BL	Black	• See specification sheets for more details	
	T38 RP SL	Silver		

 <p>Cord and Plug Connector</p>	Catalog #	Finish	Description	Dimensions
	T22 WH	White	• Comes with 15' two-wire white cord	
	T22 BL	Black	• Includes surface wire retainers and in-line switch	
	T22 SL	Silver	• Maximum capacity 7 amps	
	T122 WH	White	• Same as above but with matching color 3-wire grounded cord and plug	
	T122 BL	Black	• No switch	
	T122 SL	Silver		

Electrical Floating Feed

 <p>Floating Electrical Feed</p>	Catalog #	Finish	Description	Dimensions
	T29 WH	White	• Permits mounting to any point of track under outlet box	
	T29 BL	Black	• Includes floating connector and outlet box cover plus extra track dead end	
	T29 SL	Silver		















Electrical Joiner Feed

 <p>T-Bar Adjustable Joiner Feed</p>	Catalog #	Finish	Description	Dimensions
	T35 WH	White	• Joins two track sections to make 90° angle or straight run	
	T35 BL	Black	• Wiring compartment contains standard 1/2" KO's	
	T35 SL	Silver	• Feeds from above when 15/16" T-bar is directly above track	

Trac-Master® | Track System Components

One-Circuit System


Track Joiners

 Straight Connector	Catalog # T23 WH T23 BL T23 SL	Finish White Black Silver	Description <ul style="list-style-type: none"> Joins two track sections end to end 	Dimensions 
	Catalog # T24N WH* T24N BL* T24N SL*	Finish White Black Silver	Description <ul style="list-style-type: none"> Joins two track sections to make 90° angle or straight run Straight and right angle covers supplied For outlet box feed, T27 outlet box cover also required (order separately) 	Dimensions 
 Adjustable Connector	Catalog # T24F WH* T24F BL* T24F SL*	Finish White Silver Black	Description <ul style="list-style-type: none"> Same as T24N but permits electrical feed Required in Canada only 	
	<small>* T24N cannot be used as a feed connector in Canada - use T24F as feed connector in Canada.</small>			
 Accordion Adjustable Joiner	Catalog # T20 WH T20 BL T20 SL	Finish White Black Silver	Description <ul style="list-style-type: none"> Can flex to 90° angle to left, right, up or down Joins two track sections 	Dimensions 
	Catalog # T49 WH T49 BL T49 SL	Finish White Black Silver	Description <ul style="list-style-type: none"> Permits track to continue a run around obstructions Includes one left and one right T34 Conduit Adapter Accepts standard 1/2" conduit connector 	Dimensions 
 Track Continuation Kit	Catalog # T25 WH* T25 BL* T25 SL*	Finish White Black Silver	Description <ul style="list-style-type: none"> Joins three track sections For outlet box feed, T27 outlet box cover also required (order separately) 	Dimensions 
	Catalog # T25F WH* T25F BL* T25F SL*	Finish White Black Silver	Description <ul style="list-style-type: none"> Same as T25 but permits electrical feed Required in Canada only 	
 "T" Connector	Catalog # T25 RP WH* T25 RP BL* T25 RP SL*	Finish White Black Silver	Description <ul style="list-style-type: none"> Same as above except designed for use in opposite polarity orientation compared to standard connectors See specification sheets for more details 	
	<small>* T25 cannot be used as a feed connector in Canada - use T25F as feed connector in Canada.</small>			
 "X" Connector	Catalog # T26 WH* T26 BL* T26 SL*	Finish White Black Silver	Description <ul style="list-style-type: none"> Joins four track sections at 90° angles For outlet box feed, T27 outlet box cover also required (order separately) 	Dimensions 
	Catalog # T26F WH* T26F BL* T26F SL*	Finish White Black Silver	Description <ul style="list-style-type: none"> Same as T26 but permits electrical feed Required in Canada only 	
 Outlet Box Cover	Catalog # T27 WH T27 BL T27 SL	Finish White Black Silver	Description <ul style="list-style-type: none"> Use with No. T24, T25, T26, for outlet box electrical feed Includes nipple, locknut and ground screw 	Dimensions 
	<small>* T26 cannot be used as a feed connector in Canada - use T26F as feed connector in Canada.</small>			

Trac-Master® | Track System Components

One-Circuit System


Cable Suspension Kit




T-Bar/Rigid Ceiling
Cable Suspension Kit

Catalog #	Finish	Description
T595 48IN WH	White	<ul style="list-style-type: none">• Mechanical-only cable suspension kit for one-circuit or two-circuit track• Adjustable 48" or 144" cable• For use on 15/16" flush T-bar ceilings
T595 48IN BL	Black	
T595 144IN WH	White	
T595 144IN BL	Black	

T597 48IN WH	White	<ul style="list-style-type: none">• Mechanical-only cable suspension kit for one-circuit or two-circuit track• Adjustable 48" or 144" cable• For use on rigid ceilings
T597 48IN BL	Black	
T597 144IN WH	White	
T597 144IN BL	Black	






T-Bar/Rigid Ceiling Cable
Suspension/Feed Kit

Catalog #	Finish	Description
T596 48IN WH	White	<ul style="list-style-type: none">• Cable suspension kit with 48" or 144" electrical feed for one-circuit track• For use on 15/16" flush T-bar ceilings• Order track electrical feed connector separately
T596 48IN BL	Black	
T596 144IN WH	White	
T596 144IN BL	Black	



T598 48IN WH	White	<ul style="list-style-type: none">• Cable suspension kit with 48" or 144" electrical feed for one-circuit track• For use on rigid ceilings• Order track electrical feed connector separately
T598 48IN BL	Black	
T598 144IN WH	White	
T598 144IN BL	Black	






Trac-Master® | Track System Components

One-Circuit System

Pendant Mounting Accessories

	Catalog #	Finish	Description	Dimensions
 T-Bar Ceiling Pendant Stem Kit	T90 12IN WH	White	<ul style="list-style-type: none"> Compatible with 15/16" flush T-bar ceilings 12", 18", 24", 36", 48" stem lengths Use two for 2', 4', or 6' of track or three for 8' and four for 12' of track For electrical feed, order wireway cover T93 and T38 	
	T90 12IN BL	Black		
	T90 12IN SL	Silver		
	T90 18IN WH	White		
	T90 18IN BL	Black		
	T90 18IN SL	Silver		
	T90 24IN WH	White		
	T90 24IN BL	Black		
	T90 24IN SL	Silver		
	T90 36IN WH	White		
	T90 36IN BL	Black		
	T90 36IN SL	Silver		
	T90 48IN WH	White		
	T90 48IN BL	Black		
	T90 48IN SL	Silver		



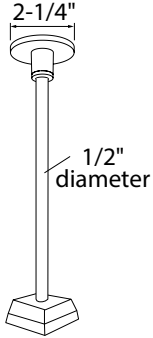









	Catalog #	Finish	Description	Dimensions
 Rigid Ceiling Pendant Stem Kit	T91 12IN WH	White	<ul style="list-style-type: none"> 12", 18", 24", 36", 48" stem lengths Attaches directly to junction box Use two for 2', 4', or 6' of track or three for 8' and four for 12' of track For electrical feed, order wireway cover T93 and T38 	
	T91 12IN BL	Black		
	T91 12IN SL	Silver		
	T91 18IN WH	White		
	T91 18IN BL	Black		
	T91 18IN SL	Silver		
	T91 24IN WH	White		
	T91 24IN BL	Black		
	T91 24IN SL	Silver		
	T91 36IN WH	White		
	T91 36IN BL	Black		
	T91 36IN SL	Silver		
	T91 48IN WH	White		
	T91 48IN BL	Black		
	T91 48IN SL	Silver		

	Catalog #	Finish	Description	Dimensions
 Pendant Stem Mechanical Support Kit	T9091M 12IN WH	White	<ul style="list-style-type: none"> For mechanical support only (no feed). Suspends track from T-bar or rigid ceilings. 12", 18", 24", 36", 48" stem lengths Use two for 2', 4', or 6' of track or three for 8' and four for 12' of track Includes Mini-Canopy, pendant stem, 1-5/16" T-bar clip, drywall anchor and track mounting hardware. 	
	T9091M 12IN BL	Black		
	T9091M 12IN SL	Silver		
	T9091M 18IN WH	White		
	T9091M 18IN BL	Black		
	T9091M 18IN SL	Silver		
	T9091M 24IN WH	White		
	T9091M 24IN BL	Black		
	T9091M 24IN SL	Silver		
	T9091M 36IN WH	White		
	T9091M 36IN BL	Black		
	T9091M 36IN SL	Silver		
	T9091M 48IN WH	White		
	T9091M 48IN BL	Black		
	T9091M 48IN SL	Silver		



Trac-Master® | Track System Components

One-Circuit System

Pendant Mounting Accessories (cont)

	Catalog # T96 WH T96 BL T96 SL Finish White Black Silver	Description <ul style="list-style-type: none"> Joins pendant stems for use in higher ceiling applications Contact factory to order additional pendant stems in desired length (12", 18", 24", 36", 48") and finish 	
Pendant Stem Coupling			
	Catalog # T94 WH T94 BL T94 SL Finish White Black Silver	Description <ul style="list-style-type: none"> Allows T90 or T91 pendant to hang straight down from sloped ceilings Can be used to feed electrical to track at up to 60° angle 	
Pendant Slope Ceiling Adapter			
	Catalog # T93 WH T93 BL T93 SL Finish White Black Silver	Description <ul style="list-style-type: none"> For use with pendant stem kits T90 and T91 Conceals electrical feed wires from stem to connector One cover should be used for each track feed 	Dimensions  10 1/8"
Feed Wireway Cover			
	Catalog # T92	Description <ul style="list-style-type: none"> For use with T24 connector when used straight Permits mounting pendant stem kits (T90, T91) at center of track connector 	
Straight Structural Bridge			
	Catalog # T92L WH T92L BL T92L SL Finish White Black Silver	Description <ul style="list-style-type: none"> For use with T24 connector when used at 90° Permits mounting pendant stem kits (T90, T91) at center of track connector 	
Corner Structural Bridge			
	Catalog # T39 BL Finish Black	Description <ul style="list-style-type: none"> 4' long black thermoplastic extrusion, covers wire carried in track wireway Use one for 4' track, two for 8' and three for 12' track Can be field cut 	Dimensions  46 1/2"
Track Wireway Cover			









Miscellaneous Mounting Accessories

	Catalog # T56 WH T56 BL T56 SL Finish White Black Silver	Description <ul style="list-style-type: none"> Attaches solid 5/16" threaded rod to one or two-circuit track Includes plastic cap, mounting bracket and hardware; rod not supplied
Solid Rod Pendant Mounting Kit		
	Catalog # T37F T37D T37F916 T37D916	Description <ul style="list-style-type: none"> To attach track to inverted tee ceiling Use two for 2' or 4' track and three for 6', 8' or 12' track T37F is compatible with 15/16" grid with flush tiles T37D is compatible with 15/16" grid with drop tiles T37F-9-16 is compatible with 9/16" grid with flush tiles T37D-9-16 is compatible with 9/16" grid with drop tiles
T-Bar Attachment Clip		

Trac-Master® | Track System Components

One-Circuit System

Miscellaneous Track Accessories

 <p>Slope Ceiling Fixture Adapter</p>	Catalog # T95 WH T95 BL	Finish White Black	Description <ul style="list-style-type: none"> Attaches to track, permitting Juno Trac-Master and Trac-Lites fixtures using the standard square Super Adapter to be hung vertically from sloped ceiling 90° maximum adjustment 	Dimensions 
 <p>Pendant Adapter</p>	Catalog # T31N WH T31N BL T31N SL	Finish White Black Silver	Description <ul style="list-style-type: none"> Adapts cord, swag or chain-hung fixture to track Includes strain relief for 3-wire cord (replaces chain loop) Chain installation accepts wire diameters up to 0.270" and supports up to 15 lbs.; strain relief installation requires Type SVT 18/3 3-wire cord and supports up to 5 lbs. UL Listed 5A max 	Dimensions 
 <p>Planter or Utility Hook</p>	Catalog # T32 WH T32 BL	Finish White Black	Description <ul style="list-style-type: none"> Supports up to 25 lbs. Not UL Listed 	Dimensions 
 <p>Outlet Adapter</p>	Catalog # T33 WH T33 BL T33 SL	Finish White Black Silver	Description <ul style="list-style-type: none"> Provides electrical receptacle Not UL Listed 7A max 	Dimensions 

Note: T31N is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.

Trac-Master® | Track System Components

Two-Circuit System



Two-Circuit Track Sections

Includes dead-end and Super Adapter upper-circuit contact supports.

Description


The Juno two-circuit Trac-Master® sections feature a sleek low profile design with the flexibility of individual circuit control for combining dual lighting effects along a single track. Juno two-circuit Trac-Master® track offers maximum switching flexibility and two 20 amp circuits (2400 watts each). The system permits individual circuit control (for both circuits) with the use of switches, dimmers or timers. In long track runs, the increased capacity eliminates 50% of the feed points. Two-circuit Trac-Master® track will accept all Juno Trac-Master lampholders. Track sections are available as surface mounted track or may be suspended from ceilings with pendant accessories listed in Two-Circuit System Pendant Mounting Accessories section.

Features

- Trac-Lites track is compatible with both Trac-Lites & Trac-Master fixtures
- Extruded aluminum channel
- Extruded thermoplastic insulator
- Debossed polarity line
- 12-gauge solid copper conductors
- Concealed wireway on top of track section
- UL Listed, CSA Certified
- Can be cut to custom length by installer



Catalog #	Finish	Description
TU 2FT WH	White	2' Two-Circuit Track (actual length 19 7/8")
TU 2FT BL	Black	5 contact supports included
TU 2FT SL	Silver	
TU 4FT WH	White	4' Two-Circuit Track (actual length 43 7/8")
TU 4FT BL	Black	5 contact supports included
TU 4FT SL	Silver	
TU 6FT WH	White	6' Two-Circuit Track (actual length 67 7/8")
TU 6FT BL	Black	5 contact supports included
TU 6FT SL	Silver	
TU 8FT WH	White	8' Two-Circuit Track (actual length 91 7/8")
TU 8FT BL	Black	10 contact supports included
TU 8FT SL	Silver	
TU 12FT WH	White	12' Two-Circuit Track (actual length 139 7/8")
TU 12FT BL	Black	15 contact supports included
TU 12FT SL	Silver	



Dead End



Track Dead End

Catalog #	Finish	Description
TU28 WH	White	• Track Dead End for use on Juno Trac-Master two-circuit track system field-cut track sections
TU28 BL	Black	
TU28 SL	Silver	




Electrical End Feeds



End Feed Connector and Outlet Box Cover

Catalog #	Finish	Description
TU21 WH	White	• For outlet box feed
TU21 BL	Black	• Includes outlet cover, fixture strap and ground screw
TU21 SL	Silver	
TU21 RP WH	White	• Same as above except designed for use in opposite polarity orientation compared to standard feed connectors
TU21 RP BL	Black	
TU21 RP SL	Silver	• See specification sheets for more details







The product and system may be covered by the following United States patent: U5,259,774

Trac-Master® | Track System Components



Two-Circuit System

Electrical End Feeds (cont)



 End Feed Connector	Catalog #	Finish	Description	Dimensions
	TU38 WH TU38 BL TU38 SL	White Black Silver	<ul style="list-style-type: none"> Feed track from above with flexible conduit, BX, etc., or end feed in pendant systems Accepts standard 1/2" connector 	
	TU38 RP WH TU38 RP BL TU38 RP SL	White Black Silver	<ul style="list-style-type: none"> Same as above except designed for use in opposite polarity orientation compared to standard feed connectors See specification sheets for more details 	

 Conduit Adapter	Catalog #	Finish	Description	Dimensions
	TU34 WH TU34 BL TU34 SL	White Black Silver	<ul style="list-style-type: none"> For surface wiring Accepts standard 1/2" connector 	
	TU34 RP WH TU34 RP BL TU34 RP SL	White Black Silver	<ul style="list-style-type: none"> Same as above except designed for use in opposite polarity orientation compared to standard adapters See specification sheets for more details 	



The product and system may be covered by the following United States patent: U5,259,774

 T-Bar End Feed	Catalog #	Finish	Description	Dimensions
	TU36 WH TU36 BL TU36 SL	White Black Silver	<ul style="list-style-type: none"> Wiring compartment contains standard 1/2" KO's Feeds surface track from above when 15/16" T-bar is directly above track 	
	TU36 RP WH TU36 RP BL TU36 RP SL	White Black Silver	<ul style="list-style-type: none"> Same as above except designed for use in opposite polarity orientation compared to standard feeds See specification sheets for more details 	

Floating Electrical Feed

 Floating Electrical Feed	Catalog #	Finish	Description	Dimensions
	TU29 WH TU29 BL TU29 SL	White Black Silver	<ul style="list-style-type: none"> Permits mounting any point along track at the outlet box Includes floating connector, outlet box cover and extra track dead end 	













Electrical Joiner Feed

 T-Bar Adjustable Joiner Feed	Catalog #	Finish	Description	Dimensions
	TU35 WH TU35 BL TU35 SL	White Black Silver	<ul style="list-style-type: none"> Joins two track sections to make 90° angle or straight run Wiring compartment contains standard 1/2" KO's Feeds from above when 15/16" T-bar is directly above track 	

Trac-Master® | Track System Components

Two-Circuit System

Track Joiners



 Miniature Straight Connector	Catalog # TU23 WH TU23 BL TU23 SL	Finish White Black Silver	Description <ul style="list-style-type: none"> Joins two track sections end to end 	Dimensions 
 Adjustable Connector	Catalog # TU24 WH* TU24 BL* TU24 SL*	Finish White Black Silver	Description <ul style="list-style-type: none"> Joins two track sections to make 90° angle or straight run Straight and right angle covers supplied For outlet box feed, T27 cover plate also required (order separately) 	Dimensions 
 "T" Connector	Catalog # TU25 WH* TU25 BL* TU25 SL*	Finish White Black Silver	Description <ul style="list-style-type: none"> Joins three track sections For outlet box feed, T27 cover plate also required (order separately) 	Dimensions 
	TU25 RP WH* TU25 RP BL* TU25 RP SL*	White Black Silver	<ul style="list-style-type: none"> Same as above except designed for use in opposite polarity orientation compared to standard connectors See specification sheets for more details 	
 "X" Connector	Catalog # TU26 WH* TU26 BL* TU26 SL*	Finish White Black Silver	Description <ul style="list-style-type: none"> Joins four track sections at 90° angles For outlet box feed, T27 cover plate also required (order separately) 	Dimensions 
 Outlet Box Cover	Catalog # T27 WH T27 BL T27 SL	Finish White Black Silver	Description <ul style="list-style-type: none"> Use with No. TU24, TU25, TU26, for outlet box electrical feed Includes nipple, locknut and ground screw 	Dimensions 
 Accordion Adjustable Joiner	Catalog # TU20 WH TU20 BL TU20 SL	Finish White Black Silver	Description <ul style="list-style-type: none"> Can flex to 90° angle to left, right, up or down Joins two track sections 	Dimensions 



* TU24, TU25 and TU26 cannot be used as feed connectors in Canada.

Trac-Master® | Track System Components




Two-Circuit System



Cable Suspension Kit

 T-Bar/Rigid Ceiling Cable Suspension Kit	Catalog #	Finish	Description	
	T595 48IN WH	White	<ul style="list-style-type: none">• Mechanical-only cable suspension kit for one-circuit or two-circuit track• Adjustable 48" or 144" cable• For use on 15/16" flush T-bar ceilings	
	T595 48IN BL	Black		
	T595 144IN WH	White		
	T595 144IN BL	Black		
	T597 48IN WH	White	<ul style="list-style-type: none">• Mechanical-only cable suspension kit for one-circuit or two-circuit track• Adjustable 48" or 144" cable• For use on rigid ceilings	
	T597 48IN BL	Black		
	T597 144IN WH	White		
T597 144IN BL	Black			

	Catalog #	Finish	Description	
	TU598 48IN WH	White	<ul style="list-style-type: none">• Cable suspension kit with 48" or 144" electrical feed for two-circuit track• For use on rigid ceilings• Order track electrical feed connector separately	
	TU598 48IN BL	Black		
	TU598 144IN WH	White		
	TU598 144IN BL	Black		
Rigid Ceiling Cable Suspension/Feed Kit				

Pendant Mounting Accessories


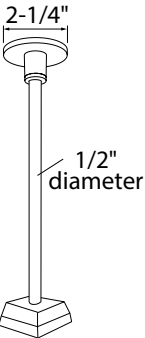








	Catalog #	Finish	Description	Dimensions
	T90 12IN WH	White	<ul style="list-style-type: none"> Compatible with 15/16" T-bar ceilings 12", 18", 24", 36", 48" stem lengths Use two for 2', 4', or 6' of track or three for 8' and four for 12' of track For electrical feed, order T93 wireway cover and TU38 End Feed separately 	
	T90 12IN BL	Black		
	T90 12IN SL	Silver		
	T90 18IN WH	White		
	T90 18IN BL	Black		
	T90 18IN SL	Silver		
	T90 24IN WH	White		
	T90 24IN BL	Black		
	T90 24IN SL	Silver		
	T90 36IN WH	White		
	T90 36IN BL	Black		
	T90 36IN SL	Silver		
	T90 48IN WH	White	<ul style="list-style-type: none"> 12", 18", 24", 36", 48" stem lengths Attaches directly to junction box Use two for 2', 4', or 6' of track or three for 8' and four for 12' of track For electrical feed, order T93 wireway cover and TU38 End Feed separately 	
	T90 48IN BL	Black		
	T90 48IN SL	Silver		

	Catalog #	Finish	Description	Dimensions
	T91 12IN WH	White	<ul style="list-style-type: none"> 12", 18", 24", 36", 48" stem lengths Attaches directly to junction box Use two for 2', 4', or 6' of track or three for 8' and four for 12' of track For electrical feed, order T93 wireway cover and TU38 End Feed separately 	
	T91 12IN BL	Black		
	T91 12IN SL	Silver		
	T91 18IN WH	White		
	T91 18IN BL	Black		
	T91 18IN SL	Silver		
	T91 24IN WH	White		
	T91 24IN BL	Black		
	T91 24IN SL	Silver		
	T91 36IN WH	White		
	T91 36IN BL	Black		
	T91 36IN SL	Silver		
Rigid Ceiling Pendant Stem Kit	T91 48IN WH	White		
	T91 48IN BL	Black		
	T91 48IN SL	Silver		

Trac-Master® | Track System Components

Two-Circuit System











Pendant Mounting Accessories

	Catalog # T9091M 12IN WH White T9091M 12IN BL Black T9091M 12IN SL Silver T9091M 18IN WH White T9091M 18IN BL Black T9091M 18IN SL Silver T9091M 24IN WH White T9091M 24IN BL Black T9091M 24IN SL Silver T9091M 36IN WH White T9091M 36IN BL Black T9091M 36IN SL Silver T9091M 48IN WH White T9091M 48IN BL Black T9091M 48IN SL Silver	Description <ul style="list-style-type: none"> For mechanical support only (no feed). Suspends track from T-bar or rigid ceilings. 12", 18", 24", 36", 48" stem lengths Use two for 2', 4', or 6' of track or three for 8' and four for 12' of track Includes Mini-Canopy, pendant stem, 1-5/16" T-bar clip, drywall anchor and track mounting hardware. 	Dimensions 
	Catalog # T96 WH White T96 BL Black T96 SL Silver	Description <ul style="list-style-type: none"> Joins pendant stems for use in higher ceiling applications Contact factory to order additional pendant stems in desired length (12", 18", 24", 36", 48") and finish 	
	Catalog # T94 WH White T94 BL Black T94 SL Silver	Description <ul style="list-style-type: none"> Allows T90 or T91 pendant to hang straight down from sloped ceilings Can be used to feed electrical to track at up to a 60° angle 	
	Catalog # T93 WH White T93 BL Black T93 SL Silver	Description <ul style="list-style-type: none"> For pendant stem kits T90 and T91 Conceals electrical feed wires from stem to track connector One cover should be used for each track feed 	Dimensions 
	Catalog # T39 BL Black	Description <ul style="list-style-type: none"> 4' black thermoplastic extrusion covers wire carried in track wireway Use one for 4' track, two for 8' and three for 12' track Can be field cut 	Dimensions 

Trac-Master® | Track System Components

Two-Circuit System


Miscellaneous Mounting Accessories

	Catalog # T56 WH T56 BL T56 SL	Finish White Black Silver	Description <ul style="list-style-type: none">• Attaches solid 5/16" threaded rod to one or two-circuit track• Includes: plastic cap, mounting bracket and hardware• Rod not supplied		
	Catalog # T37F T37D T37F916 T37D916		Description <ul style="list-style-type: none">• To attach track to inverted tee ceiling• Use two for 2' or 4' track and three for 6', 8' or 12' track• T37F is compatible with 15/16" grid with flush tiles• T37D is compatible with 15/16" grid with drop tiles• T37F916 is compatible with 9/16" grid with flush tiles• T37D916 is compatible with 9/16" grid with drop tiles		
	Catalog # T95 WH T95 BL	Finish White Black	Description <ul style="list-style-type: none">• Attaches to track, permitting Juno Trac-Master and Trac-Lites fixtures using the standard square Super Adapter to be hung vertically from sloped ceiling• 90° maximum adjustment	Dimensions 	
	Catalog # T31N WH T31N BL T31N SL	Finish White Black Silver	Description <ul style="list-style-type: none">• Adapts cord, swag or chain-hung fixture to track• Includes strain relief for 3-wire cord (replaces chain loop)• Chain installation accepts wire diameters up to 0.270" and supports up to 15 lbs.; strain relief installation requires Type SVT 18/3 3-wire cord and supports up to 5 lbs.• UL Listed• 5A max	Dimensions 	
Note: T31N is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.					
	Catalog # T32 WH T32 BL	Finish White Black	Description <ul style="list-style-type: none">• Supports up to 25 lbs.• Not UL Listed	Dimensions 	
	Catalog # T33 WH T33 BL T33 SL	Finish White Black Silver	Description <ul style="list-style-type: none">• Provides electrical receptacle• Not UL Listed• 7A max	Dimensions 	

Note: T31N is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.

Trac-Master® | Track System Components

Recessed Trac System

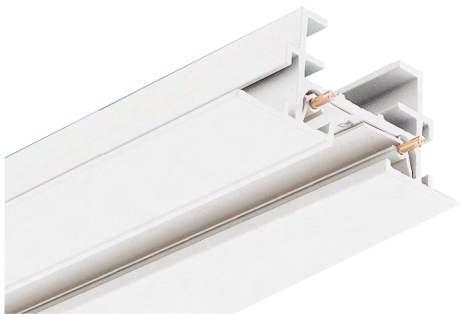

Description

Designed to be installed in dry ceiling applications, such as suspended tile or drywall, in straight run configurations only.

Recessed Trac provides a clean, built-in and finished look to lighting designs. Juno's Recessed Trac installs into plasterboard and suspended ceilings for polished, professional decor. One-circuit Trac-Master® Recessed Trac sections allow track fixtures to be mounted flush to the ceiling.

Features:

- Extruded aluminum channel
- Extruded thermoplastic insulator
- Debossed polarity line
- 12-gauge solid copper conductors
- 20 amp capacity
- UL Listed, CSA Certified
- Can be cut to custom length by installer

Recessed Trac Sections

	Catalog #	Finish	Description	Dimensions
	TREC 4FT WH	White	4' Recessed Trac (One circuit, actual length 43 7/8")	
	TREC 8FT WH	White	8' Recessed Trac (One circuit, actual length 91 7/8")	

Recessed Trac Connectors









	Catalog #	Finish	Description	Dimensions
 End Feed Connector	T121 WH	White	<ul style="list-style-type: none"> • With wiring box for electrifying track 	
 Mini Straight Connector	T123 WH	White	<ul style="list-style-type: none"> • Mechanically and electrically joins two track sections end to end 	

The product and system may be covered by the following United States patent: US5,259,774

Trac-Master® | Track System Components

Recessed Trac System

Miscellaneous Track Accessories

 Slope Ceiling Fixture Adapter	Catalog # T95 WH T95 BL	Finish White Black	Description <ul style="list-style-type: none"> • Attaches to track, permitting Juno line voltage Trac-Master and Trac-Lites track fixtures using the standard square Super Adapter to be hung vertically from sloped ceiling • 90° maximum adjustment 	Dimensions 
 Pendant Adapter	Catalog # T31N WH T31N BL T31N SL	Finish White Black Silver	Description <ul style="list-style-type: none"> • Adapts swag or chain-hung fixture to track • Includes strain relief for 3-wire cord (replaces chain loop) • Chain installation accepts wire diameters up to 0.270" and supports up to 15 lbs.; strain relief installation requires Type SVT 18/3 3-wire cord and supports up to 5 pounds. • UL Listed • 5A max 	Dimensions 
 Planter or Utility Hook	Catalog # T32 WH T32 BL	Finish White Black	Description <ul style="list-style-type: none"> • Supports up to 25 lbs. • Not UL Listed 	Dimensions 
 Outlet Adapter	Catalog # T33 WH T33 BL T33 SL	Finish White Black Silver	Description <ul style="list-style-type: none"> • Provides electrical receptacle • Not UL Listed • 7A max 	Dimensions 

Note: T31N is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.

Trac-Master® | Track System Components

Extension Wands & Fixture Slope Ceiling Adapter

Extension Wands

Extension wands suspend fixtures precisely where they are needed without lowering the track section. On/Off switch is standard.

Line Voltage Extension Wands

Line voltage extension wands suspend most Juno Trac-Master and Trac-Lites line voltage track fixtures from all 120V Juno Trac-Master and Trac-Lites track. They are designed for use with the standard square Super Adapter found on most Trac-Master and Trac-Lites fixtures. Always confirm the fixture adapter type before specifying an extension wand to ensure compatibility. May also be used with Trac-Master and Trac-Lites Monopoints designed to accept Juno 120V track fixtures. For sloped ceiling applications, use TEWS versions.

Low Voltage Extension Wands

Low voltage extension wands suspend low voltage mini spotlights from Juno T537 Transformers.

	Line Voltage Extension Wands	Low Voltage Extension Wands	Finish	Overall Length
	Super Adapter Catalog #	Catalog #		
Line Voltage	TEW 12IN WH	TWL12 12IN WH	White	13 1/2"
	TEW 12IN BL	TWL12 12IN BL	Black	
	TEW 12IN SL		Silver	
	TEW 18IN WH	TWL12 18IN WH	White	19 1/2"
	TEW 18IN BL	TWL12 18IN BL	Black	
	TEW 24IN WH	TWL12 24IN WH	White	25 1/2"
Low Voltage	TEW 24IN BL	TWL12 24IN BL	Black	
	TEW 36IN WH	TWL12 36IN WH	White	37 1/2"
	TEW 36IN BL	TWL12 36IN BL	Black	
	TEW 48IN WH	TWL12 48IN WH	White	49 1/2"
	TEW 48IN BL	TWL12 48IN BL	Black	
	TEWS WH*	-	White	28 1/2"
	TEWS BL*	-	Black	

* 24IN wand with slope adapter on top.

Fixture Slope Ceiling Adapter

Attaches to track, permitting Juno Trac-Master and Trac-Lites track fixtures to be hung vertically from sloped ceiling. Designed for use with the standard square Super Adapter found on most Trac-Master and Trac-Lites fixtures. Always confirm the adapter type before specifying a slope ceiling adapter to ensure compatibility. 90° maximum adjustment.




Catalog

T95 WH
T95 BL

Finish

White
Black

Dimensions



Trac-Master® | Track System Components

Monopoints

Monopoints

Monopoints increase the versatility of Juno Trac fixtures by allowing them to be mounted where track sections may not offer the best aesthetic or functional solution.

Outlet Box Monopoints

	Catalog # T40N WH T40N BL T40N SL	Finish White Black Silver	Description <ul style="list-style-type: none"> • Mounts directly to outlet box • Accepts Juno Trac-Master & Trac-Lites 120V track fixtures 	Dimensions
Line Voltage Monopoint				
	Catalog # T40F WH T40F BL	Finish White Black	Description <ul style="list-style-type: none"> • Mounts directly to 4" outlet box only • Accepts Juno Trac-Master & Trac-Lites 120V track fixtures using the standard square Super Adapter 	Dimensions
Line Voltage Monopoint-Flush Mount				
	Catalog # T58 WH T58 BL	Finish White Black	Description <ul style="list-style-type: none"> • Mounts directly to outlet box • Designed to be used with T537 Transformers or with T252L fixtures 	Dimensions
Low Voltage Monopoint				
	Catalog # T41N WH T41N BL	Finish White Black	Description <ul style="list-style-type: none"> • Mounts directly to outlet box • Accepts two Juno Trac-Master or Trac-Lites 120V track fixtures 	Dimensions
Line Voltage Duopoint				

Special Monopoints

	Catalog # T42N WH T42N BL	Finish White Black	Description <ul style="list-style-type: none"> • Heavy base enables track fixture to be placed on a horizontal surface (i.e. floor, shelf) and aimed upwards • Accepts Juno Trac-Master & Trac-Lites 120V track fixtures • Supplied with 8' cord and plug for portable use 	Dimensions
Weighted Base				



Trac-Master® | Track System Components

Coil Cord Clamp-Ons & Outrigger Mounting Bracket

Coil Cord Clamp-Ons with Monopoint

Coil cord clamp-ons provide an innovative way to mount fixtures to pipe and flat surfaces up to 1 1/2" thick. Designed with futuristic styling in mind for dynamic displays and special mounting situations.



Track Line Voltage Coil Cord Clamp-On

Super Adapter Catalog

T132 WH
T132 BL


Finish

White
Black

Description

- Attaches to Juno 120V Trac-Master & Trac-Lites 120V and Monopoints
- Accepts Juno Trac-Master & Trac-Lites 120V track (confirm fixture adapter type before specifying to ensure compatibility)
- Includes On/Off switch
- 2' coil cord extends to 5'

Dimensions



Plug-In Line Voltage Coil Cord Clamp-On

Super Adapter Catalog

T133 WH
T133 BL


Finish

White
Black

Description

- With coil cord and male plug (for standard 120V receptacle)
- Accepts Juno Trac-Master & Trac-Lites 120V track fixtures (confirm fixture adapter type before specifying to ensure compatibility)
- Includes On/Off switch
- 2' coil cord extends to 5'

Dimensions



Outrigger Track Mounting Bracket (non-electrified)



Outrigger Track Mounting Bracket

Catalog

T47 WH
T47 BL

Finish

White
Black

Description

- For mounting track out from wall
- Use two for 2', 4' or 6' track sections, three for 8' sections, four for 12' sections
- Order track and track connectors separately
- For portable electric feed, use T22 or T122 Cord Set
- For permanent wiring, use T38 Live End Feed

Dimensions

24"L x 8"H

Trac-Master® | Track System Components

Low Voltage Transformers

LED-Compatible Low Voltage Transformers



Designer Transformer

Catalog

T537 G2 LED WH
T537 G2 LED BL
T537 G2 LED SL


Finish

White
 Black
 Silver

Description

- Low profile designer 12V, 60VA electronic transformer with On/Off switch
- Attaches to all Trac-Master or Trac-Lites track
- Compatible with 12V AC LED or halogen fixtures consuming up to 60W

Dimensions



Note: T537 is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.

LED-Compatible Quick Jack Low Voltage Transformers



Quick Jack Transformer

Catalog

T537QJ G2 LED WH
T537QJ G2 LED BL
T537QJ G2 LED SL


Finish

White
 Black
 Silver

Description

- Low profile designer 12V, 60VA Quick Jack electronic transformer with On/Off switch
- Attaches to all Trac-Master or Trac-Lites track
- Compatible with 12V AC LED or halogen fixtures with Quick Jack adapter, consuming up to 60W

Dimensions



Note: T537QJ is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.

Trac-Master® | Track System Current Limiting Solutions

T24 & T24M – The SilverBullet



Overview

The SilverBullet is a “sub-branch circuit current limiter” for track lighting that enforces a definite current limit to lower the VA rating of each track lighting circuit and meet code requirements. Use of a current limiting subpanel is often a more cost-effective method of employing current limiting, especially for applications with more than 10 circuits to limit.

Features

- Current limiting for up to 21 circuits
- Current limiting breakers available from 1A-15A
- AIC rating of 10,000A @ 120V-277V
- Factory pre-assembled with each load factory labeled on the door sheet

Enclosure Dimensions

- 1-12 breakers
12”W x 12”H x 4”D
- 6-21 breakers
12”W x 18”H x 4”D

Enclosure Type

Surface mount, hinged locking door, NEMA 1

Optional Enclosures

Flush Mount

Maximum Humidity

10-90% non-condensing

Ambient Temperature

32–104° F (0–40° C)

(Note: Thermal magnetic breakers. De-rate to 80% of load for temperatures over 70° F)

Listings

C-UL-US Listed

Warranty

Three-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Ordering Information

Ordering Examples: T24 1077UL 10BP 1A3 3A7 SM

System	Breaker UL Listing	Breaker Positions	Breaker Limit + Configuration ¹	Enclosure Mountings
T24 Standard (21 breakers max.)	1077UL Standard	(qty) BP # of positions	1A(qty) 1 amp breaker	SM Surface Mount
T24M Mini (12 breakers max.)			2A(qty) 2 amp breaker	FM Flush Mount
			3A(qty) 3 amp breaker	
			4A(qty) 4 amp breaker	
			5A(qty) 5 amp breaker	
			6A(qty) 6 amp breaker	
			7A(qty) 7 amp breaker	
			8A(qty) 8 amp breaker	
			10A(qty) 10 amp breaker	
			13A(qty) 13 amp breaker	
			15A(qty) 15 amp breaker	

¹ Total number of (qty) breakers must equal the number of breaker positions.

Trac-Master® | Track System Current Limiting Solutions

T24 & T24M – The SilverBullet


Energy Code Calculations

Illustrated below is an example of what current limiting means for track lighting relative to today's energy codes. The standard layout without a current limiting solution consists of 100' of single circuit track (4 circuits x 25' each) with 32 LED track fixtures, each consuming 24W maximum, for a total connected load of 768W. Per the Title 24 energy code, the wattage calculation would be a much greater 4500W.


The scenario with the Trac-Master Current Limiting Subpanel uses the original 100' of single circuit track, broken down into four 25' runs, with each monitored by a 2-Amp current limiting supplementary protector that is closely matched to the actual connected load plus a small buffer. This results in the minimum calculated watts per the energy codes, making the wattage calculation independent of track length. In a real application, there would be many more track lighting circuits, resulting in an even greater calculated wattage reduction.

Calculations Example

Without Current Limiting

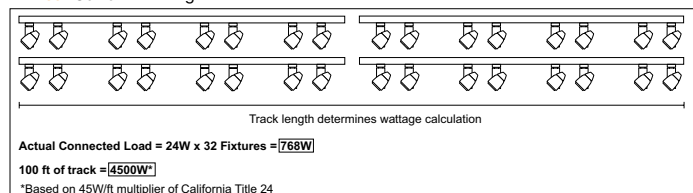

With Current Limiting

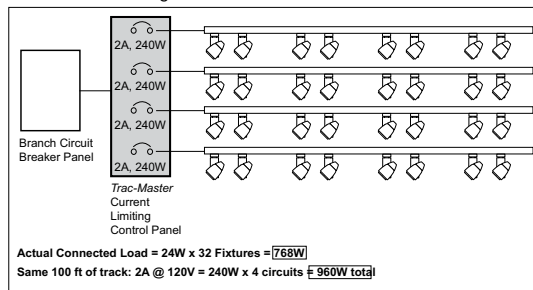

Trac-Master® | Track System Current Limiting Solutions

Current Limiting Track Feeds



Description

Juno Current Limiting Feeds are the perfect solution for new construction or for bringing existing Juno line voltage track lighting applications into conformance with today's stringent energy codes. They enable you to take full advantage of energy efficient, high-performance LED and other fixtures without being penalized by watts-per-linear-foot code calculations, reducing calculated watts by as much as 75% or more.

Current Limiting Feeds are designed to take the place of standard non-limiting feeds and are installed at every track feed location. The feeds are compact and mount close to the ceiling for an unobtrusive appearance. Available in both end feed and in-line feed configurations, the Current Limiting Feeds can be specified for either Trac-Master 1-circuit or Trac-Master 2-circuit systems. In-line feeds and 2-circuit end feeds are designed to accept up to two current limiting circuit breakers simultaneously. Feeds are supplied with tamper-resistant cover screws and screwdriver bits making installation convenient and future tampering impractical.

Current limiting circuit breakers (ordered separately) are available in increments from 0.5A to 14A enabling selection that closely matches the planned wattage use. Color-coded ON/OFF indication clearly identifies their status and they are easily resettable in the event of an overload situation.

Key Features

Designed to be installed at every track feed location, in place of a standard non-limiting feed • In-line feeds can be used to feed track as one electrical circuit in both directions or as two separate circuits using two current limiters • Feed connector and current limiting circuit breaker are specified and ordered separately for maximum configuration flexibility • Not intended to be used as a primary circuit protector

Construction Heavy-duty 14-gauge (0.075 thick) die formed galvanized steel mounting plate • Surface or j-box mounting • T-bar compatible when fed directly • Mounting holes provided for j-box attachment • Center knockout enables feeding from j-box for simple wiring termination • Two 7/8" knockouts for direct electrical feed connections • Includes ground terminal attachment screw • Injection molded polycarbonate cover with tear-out for 2-breaker installations • Cover attaches to mounting plate using tamper-resistant screws (screwdriver bit supplied with electrical feed connector)

Finish Available in white, black or silver finishes • Supplementary current limiting circuit breakers are ordered separately and can be specified in corresponding finishes to match feed connector










Supplementary Circuit Breakers Miniature single pole supplementary current limiters limit the current (wattage) that can be consumed on the track section being fed • Utilizes hydraulic magnetic technology which provides accurate and reliable circuit protection even when exposed to extremely hot and/or cold application environments • Rated for 120VAC, 60Hz operation • Available in individual amperage ratings of 0.5A, 1A, 2A, 3A, 4A, 5A, 6A, 7A, 8A, 9A, 10A, 12A and 14A, selected based on actual lighting loads • Can be operated continuously at rated current • Specially designed to prevent nuisance tripping • Easily snaps into mounting plate without the use of tools • Leads wires provided for simplified installations • ON/OFF indication clearly identifies breaker status • Easily resettable in the event of an overcurrent situation

Labels UL 1077 Listed, CSA 22.2 approved • Approved by the California Energy Commission to meet the requirements of Title 24 • Complies with ASHRAE 90.1 and IECC Section 805.5.1.4 for track current limiting


Trac-Master® | Track System Current Limiting Solutions

Current Limiting Track Feeds

Current Limiting Feeds

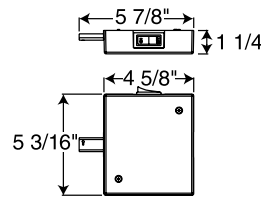	Catalog #	Finish	Track Type	Description	Dimensions
 <p>Mini End Feeds</p>	TCLFM11 WH	White	1-Circuit	End Feed	
	TCLFM11 BL	Black			
	TCLFM11 SL	Silver			
	TCLFM11 RP WH	White	1-Circuit	Same as above except designed for use in opposite polarity orientation compared to standard feeds – see specification sheets for more details	
	TCLFM11 RP BL	Black			
	TCLFM11 RP SL	Silver			
	Catalog #	Finish	Track Type	Description	Dimensions
 <p>End Feeds</p>	TCLF11 WH	White	1-Circuit	End Feed	
	TCLF11 BL	Black			
	TCLF11 SL	Silver			
	TUCLF11 WH	White	2-Circuit	End Feed	
	TUCLF11 BL	Black			
	TUCLF11 SL	Silver			
	Catalog #	Finish	Track Type	Description	Dimensions
 <p>In-Line Feeds</p>	TCLF21 WH	White	1-Circuit	In-Line Feed	
	TCLF21 BL	Black			
	TCLF21 SL	Silver			
	TUCLF21 WH	White	2-Circuit	In-Line Feed	
	TUCLF21 BL	Black			
	TUCLF21 SL	Silver			

Current Limiting Circuit Breakers - Order Separately Example: TCLF11 BL and TCLCB 5A BLCK


	Catalog #	Description	Wattage	Finish
	TCLCB 0.5A	0.5A Current Limiting Circuit Breaker	60W	WHT, BLCK
	TCLCB 1A	1A Current Limiting Circuit Breaker	120W	WHT, BLCK
	TCLCB 2A	2A Current Limiting Circuit Breaker	240W	WHT, BLCK
	TCLCB 3A	3A Current Limiting Circuit Breaker	360W	WHT, BLCK
	TCLCB 4A	4A Current Limiting Circuit Breaker	480W	WHT, BLCK
	TCLCB 5A	5A Current Limiting Circuit Breaker	600W	WHT, BLCK
	TCLCB 6A	6A Current Limiting Circuit Breaker	720W	WHT, BLCK
	TCLCB 7A	7A Current Limiting Circuit Breaker	840W	WHT, BLCK
	TCLCB 8A	8A Current Limiting Circuit Breaker	960W	WHT, BLCK
	TCLCB 10A	10A Current Limiting Circuit Breaker	1200W	WHT, BLCK
	TCLCB 12A	12A Current Limiting Circuit Breaker	1440W	WHT, BLCK
	TCLCB 14A	14A Current Limiting Circuit Breaker	1680W	WHT, BLCK

Trac-Master® | Track System Current Limiting Solutions

Current Limiting Track Feeds

Current Limiting Pendant Stem Kits

Current Limiting Pendant Stem Kits combine the functionality of pendant mounting with the ability to feed the track with current limiting in an attractive, integrated solution.




T-Bar Ceiling Mount

Catalog #	Finish
T90CLF 12IN BL	Black
T90CLF 12IN SL	Silver
T90CLF 12IN WH	White
T90CLF 18IN BL	Black
T90CLF 18IN SL	Silver
T90CLF 18IN WH	White
T90CLF 24IN BL	Black
T90CLF 24IN SL	Silver
T90CLF 24IN WH	White
T90CLF 36IN BL	Black
T90CLF 36IN SL	Silver
T90CLF 36IN WH	White
T90CLF 48IN BL	Black
T90CLF 48IN SL	Silver
T90CLF 48IN WH	White

Description

- Compatible with 15/16" flush T-bar ceilings
- 12", 18", 24", 36", 48" stem lengths
- Includes mounting plate, canopy, stem and wireway cover (order T38 or TU38 track feed connector and current limiting circuit breaker separately)

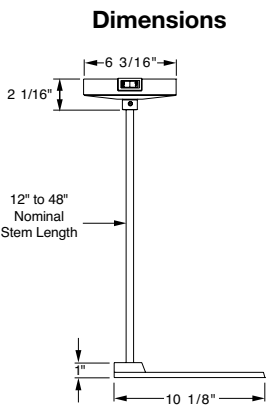


Rigid Ceiling Mount

Catalog #	Finish
T91CLF 12IN BL	Black
T91CLF 12IN SL	Silver
T91CLF 12IN WH	White
T91CLF 18IN BL	Black
T91CLF 18IN SL	Silver
T91CLF 18IN WH	White
T91CLF 24IN BL	Black
T91CLF 24IN SL	Silver
T91CLF 24IN WH	White
T91CLF 36IN BL	Black
T91CLF 36IN SL	Silver
T91CLF 36IN WH	White
T91CLF 48IN BL	Black
T91CLF 48IN SL	Silver
T91CLF 48IN WH	White

Description



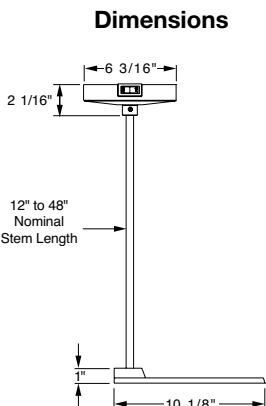



- Compatible with rigid ceilings
- 12", 18", 24", 36", 48" stem lengths
- Includes mounting plate, canopy, stem and wireway cover (order T38 or TU38 track feed connector and current limiting circuit breaker separately)



Trac-Master® | Accessories

Light Control Accessories

The Juno complete range of light control accessories permit the designer to custom tailor effects. See individual fixture page and specification sheets for additional details.

Accessory Holders		2" DIAMETER	COMPATIBLE WITH	2-3/4" DIAMETER	COMPATIBLE WITH
	Required for fixtures shown to use accessories.				
Beam Control Lenses					
	These alter the light distribution, enlarging or elongating it, softening the beam edge or removing striations.	Prismatic Spread Lens	PRISM 200	T252L, T261L, T381L, T382L, T383L, T841*	PRISM 275
		Linear Spread Lens	LSPREAD 200		LSPREAD 275
		Uniformity Lens (Solite™)	SOLITE 200		SOLITE 275
		Diffusion Lens	DIFF 200		DIFF 275
UV Filters					
	These museum quality lenses filter out ultraviolet radiation below 400 nanometers to protect sensitive art and objects from light degradation.		UVF 200		UVF 275
Dichroic Color Correction Filters					
	Color Correction Filters correct the light, to warm it up to approximate incandescent.	Halogen-to-Incandescent, 2700K	DCCF 200 HAL2700		
Color Filters		Dichroic Glass Filters			
	Color Filters change white light into colored light and are available in colored glass and more efficient/saturated dichroic filters.	Red	DGF 200 DRED		DGF 275 DRED
		Medium Green	DGF 200 MGRN		DGF 275 MGRN
		Medium Blue	DGF 200 MBLU		DGF 275 MBLU
		Yellow	DGF 200 DYEL		DGF 275 DYEL
		Magenta	DGF 200 MAGEN		DGF 275 MAGEN
		Blue-Green (Cyan)	DGF 200 CYAN		DGF 275 CYAN
		Colored Glass Filters			
		Medium Pink	CGF 200 MPINK		CGF 275 MPINK
		Warm Red	CGF 200 WRED		CGF 275 WRED
		Daylight Blue	CGF 200 DLTBLUE		CGF 275 DLTBLUE
		Medium Blue	CGF 200 MBLU		CGF 275 MBLU
		Medium Amber	CGF 200 MAMB		CGF 275 MAMB
		Medium Green	CGF 200 MGRN		CGF 275 MGRN
Louvers					
	Hexcell and Cube Cell Louvers provide greater visual source cut-off and reduce perceived fixture brightness.	Hexcell Louvers	HCLBL 200		HCLBL 300
		Cube Cell Louvers			

Solite™ is a trademark of AGC Solar.

* Simultaneously accepts any combination of up to two filters, lenses or louvers.

Trac-Master® | Accessories

Light Control Accessories

3-3/4" DIAMETER	COMPATIBLE WITH	4-11/16" DIAMETER	COMPATIBLE WITH	5-1/2" DIAMETER	COMPATIBLE WITH
T560BL	T313	T770BL*, T770SL*, T770WH*	T283L, T285L, T286L		
		TAH BLCK 469*	T1030, T1031S	TAH BLCK 550	T1038
PRISM 375	T254L*, T262L*, T263L*, T388L* and fixtures with T560BL Accessory Holder or Barn Doors noted below	PRISM 469	T255L*, T265L*, T267L*, T368 and fixtures with T770 or TAH BLCK 469 Accessory Holder or Barn Doors noted below		
LSPREAD 375		LSPREAD 469			
SOLITE 375		SOLITE 469			
DIFF 375		DIFF 469			
UVF 375		UVF 469			
DGF 375 DRED		DGF 469 DRED			
DGF 375 MGRN		DGF 469 MGRN			
DGF 375 MBLU		DGF 469 MBLU			
DGF 375 DYEL		DGF 469 DYEL			
DGF 375 MAGEN		DGF 469 MAGEN			
DGF 375 CYAN		DGF 469 CYAN			
CGF 375 MPINK		CGF 469 MPINK		CGF 550 MPINK	Fixtures with TAH BLCK 550 Accessory Holder
CGF 375 WRED		CGF 469 WRED		CGF 550 WRED	
CGF 375 DLTBLUE		CGF 469 DLTBLUE		CGF 550 DLTBLUE	
CGF 375 MBLU		CGF 469 MBLU		CGF 550 MBLU	
CGF 375 MAMB		CGF 469 MAMB		CGF 550 MAMB	
CGF 375 MGRN		CGF 469 MGRN		CGF 550 MGRN	
HCLBL 375		HCLBL 469			
CCLBL 375		CCLBL 469		CCLBL 550	

* Simultaneously accepts any combination of up to two filters, lenses or louver/cross baffle/snoot.

Continued on pages 86-87

Light Control Accessories

Snoots



Snoots

Barn Doors

2" DIAMETER		2-3/4" DIAMETER	
SNOOTBL 200		SNOOTBL 275	
T252L, T261L, T381L, T382L, T383L, T841*		T385L*, T387L*	

* Simultaneously accepts any combination of up to two filters, lenses or louvers.

Trac-Master® | Accessories

Light Control Accessories

3-3/4" DIAMETER	COMPATIBLE WITH	4-11/16" DIAMETER	COMPATIBLE WITH	5-1/2" DIAMETER	COMPATIBLE WITH
SNOOTBL 375	T254L*, T262L*, T263L*, T388L* and fixtures with T560BL Accessory Holder or Barn Doors noted below	SNOOTBL 469	T255L*, T265L*, T267L*, T368 and fixtures with TAH BLCK 469 Accessory Holder		
		T5788BL 469**	T283L, T285L, T286L		
TBDR BLCK 375	T254L, T262L, T263L, T388L	TBDR BLCK 469	T255L, T265L, T267L		
T71BL 375**	T313	TBDR BLCK 440**	T271L, T272L		
		T5774BL 469**	T283L, T285L, T286L		
		T72BL 469**	T315		

* Simultaneously accepts any combination of up to two filters, lenses or louver/cross baffle/snoot.
 ** Also accepts other accessories – see product page and specification sheet for details.

Trac-Master® | Adapters

Track Fixtures with Alternate Adapters

Juno® Track Fixtures with Alternate Adapters

Offering broader compatibility to upgrade practically any existing track installation



Has your ability to specify a Juno track fixture been limited due to incompatibility with an already installed non-Juno track system? Problem solved! Practically any track system can be upgraded utilizing high-quality Juno track fixtures.

G-type, H-type and L-type adapters are now available as standard options on a broad selection of Juno track fixture series. This selection includes virtually all LED-based track fixtures and many of our most popular low-voltage and line-voltage lampholders. These adapter options enable Juno track fixtures to be easily specified and installed on some of the most commonly used non-Juno track systems, unleashing seemingly limitless renovation opportunities. Additionally, the standard Juno Universal Track Adapter is now UL Recognized for use on compatible competitive track systems, including the ConTech® LT Series.

Alternate adapters are available on the following Juno track fixture series – see specification sheets for additional details and restrictions.

R600L	T257L	T381L	T1030
R605L	T261L	T382L	T1031S
R606L	T262L	T383L	T1038
R610L	T263L	T385L	T1040 H
R612L	T265L	T387L	T1050L
R620L	T267L	T388L	T1051L
T31N	T271L	T537	T1021L
T252L	T272L	T537QJ	T1053L
T254L	T283L	T690 BL	T1054L
T255L	T285L	T691 WH	T1056L
T256L	T286L	T1020	T1058L

For the quickest and easiest way to search track fixture adapter compatibility, visit our new & improved website at juno.acuitybrands.com/trac/trac-fixtures and search listings using the 'Track Mounting Adaptor Type' filter.

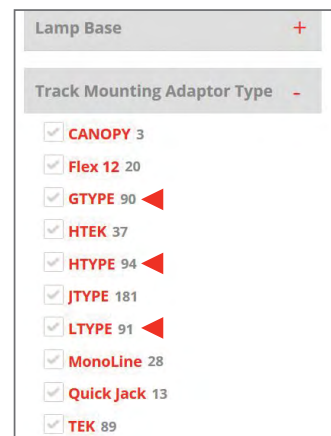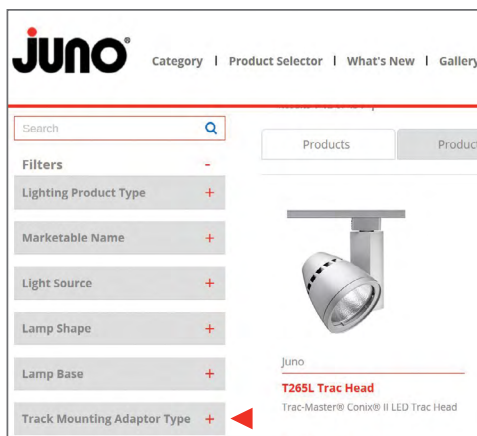

ConTech® is a registered trademark of ConTech Lighting.



Kowalski's Market, Excelsior, MN (Mark Steele Photography)

Juno® Trac-Lites™


Dynamic lighting effects at affordable prices, Juno Trac-Lites family of products features track systems and kits in the most popular styles. Quality features and pleasing forms combine to define affordable style for today's interiors. Trac-Lites fixtures are compatible with all Juno Trac-Master track systems and Trac-Master fixtures are compatible with Trac-Lites track systems.

Trac-Lites™ | LED Series

10W Truncated Cone LED

Truncated Cone R600L

The R600L Series 10W LED is an economical and affordable track fixture, with a simple and timeless conical aesthetic. It approximates the light output and distribution of 50W MR16 halogen lamps (up to 997 lumens), utilizing about 20% of the energy and having a rated life of 50,000 hours. The R600L Series LED is available in spot, narrow flood and flood beam distributions. Spot versions are achieved using a custom TIR-based optical system. Narrow flood and flood beam distributions are achieved using interchangeable precision-molded custom lenses; there is even a Universal Beam version which includes both narrow flood and flood lenses for maximum versatility.

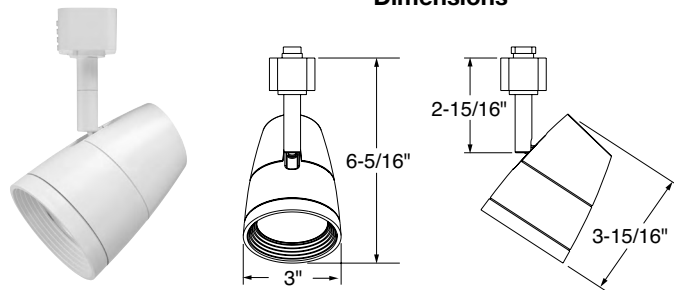

Dimensions



Ordering Information

Ordering Example: R600L G2 27K 97CRI PDIM NFL BL

Series	Mounting Adapter Type	Generation	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
R600L 10W Truncated Cone LED	(Blank) Juno Universal 120V Track Adapter	G2 Generation 2	27K 2700K	80CRI 80 CRI	PDIM Phase Dimmable	SP Spot	BL Black
	GTYPE¹ G-Type Track Adapter		30K 3000K	90CRI 90 CRI		NFL Narrow Flood	BZ Bronze
	HTYPE¹ H-Type Track Adapter		35K 3500K	97CRI³ 97 CRI		FL Flood	SL Silver
	LTYPE² L-Type Track Adapter		40K 4000K			UNF Universal- Narrow Flood & Flood	WH White
	CPY⁴ Canopy Mounted						

¹ GTYPE and HTYPE adapters available in BL, SL, and WH finish only. ² LTYPE adapter available in BL and WH finish only.

³ Special order - may have extended lead-times or order minimums; not available in 35K.

⁴ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Trac-Lites™ | LED Series


10W & 13W Integral Driver Cylinder LED

Integral Driver Cylinder R605L & R606L

The integral driver cylinder LED family are affordable, high-performance track fixtures, with a simple and timeless cylinder aesthetic. The 10W R605L Series can deliver up to 1052 lumens, and the R606L Series can deliver up to 1386 lumens, utilizing less than 1/3 of the energy of halogen equivalents and having a rated life of 50,000 hours. It is available in 2700K, 3000K, 3500K and 4000K color temperatures with a minimum 80 CRI. Optional high CRI versions are available with a minimum 90 CRI. The integral driver cylinder LED family is available in spot, narrow flood, flood and wide flood beam distributions which can be achieved with interchangeable precision-molded custom TIR optics. They are available with an optional, bayonet-mount accessory holder that accommodates one accessory if desired.



Dimensions

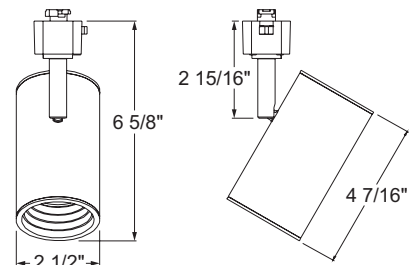

Ordering Information				Ordering Example: R605L 27K 80CRI PDIM FL BL			
Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish	Factory-Installed Accessory Holder Option
R605L 10W LED Integral Driver Cylinder	(Blank) Juno Universal 120V Track Adapter	27K 2700K 30K 3000K 35K 3500K 40K 4000K	80CRI 80 CRI 90CRI 90 CRI	PDIM Phase Dimmable	SP Spot	BL Black	AHR605 BLCK Accessory Holder for R605L/R606L - Black
R606L 13W LED Integral Driver Cylinder	GTYPE¹ G-Type Track Adapter				NFL Narrow Flood	BZ³ Bronze	
	HTYPE¹ H-Type Track Adapter				FL Flood	SL Silver	
	LTYPE² L-Type Track Adapter				WFL Wide Flood	WH White	
	CPY⁴ Canopy Mounted						AHR605 WHT Accessory Holder R605L/R606L - White

¹ GTYPE and HTYPE adapters available in BL, SL, and WH finish only. ² LTYPE adapter available in BL and WH finish only.

³ BZ finish available on R605L only. ⁴ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	R605L, R606L
Accessory Holder - Black	AHR605 BLCK 200
Accessory Holder - White	AHR605 WHT 200
Color Filters	CGF 200*
Dichroic Filters	DGF 200*
Dichroic Color Correction Filters	DCCF 200*
Diffusion Lens	DIFF 200*
Uniformity Lens	SOLITE 200*
UV Filter	UVF 200*
Prismatic Spread Lens	PRISM 200*
Linear Spread Lens	LSPREAD 200*
Hexcell Louver	HCLBL 200*
Snoot	SNOOTBL 200*

* Filters, lenses, louver, and snoot require accessory holder for installation.

Trac-Lites™ | LED Series


21W & 37W Integral Driver Cylinder LED

Integral Driver Cylinder R610L & R612L

Clean and elegant, with a simple cylindrical form, the R610L and R612L Integral Driver LED Cylinder track fixtures expand the versatility and applications for this industry-leading offering. Offering exceptional value, the performance of these fixtures is second to none, offering 2 new lumen packages at 2200 lumens and 3200 lumens while consuming only 21W and 37W, respectively. These fixtures feature a cleverly designed nested yoke arm that enables simple straight-down aiming if desired. Each fixture can be specified with a variety of CCTs, CRIs and beam distributions. Accessory reflectors are available to alter beam distributions in the field. A factory-assembled or field-installed bayonet-mount accessory holder is available, enabling an assortment of light control accessories to be added in the field for maximum visual comfort and to create practically any desired beam effect.



Dimensions

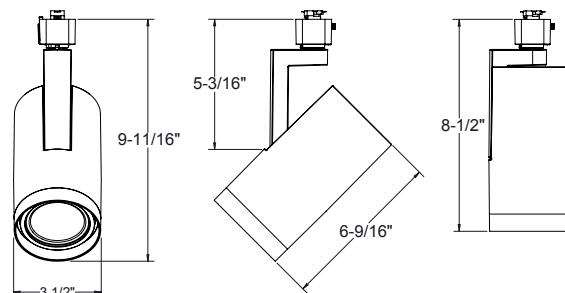

Ordering Information

Ordering Example: R610L HTYPE 30K 90CRI PDIM SP WH AHR610 WHT

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish	Factory-Installed Accessory Holder Option
R610L 21W LED Integral Driver Cylinder	(Blank) Juno Universal 120V Track Adapter	27K 2700K 30K 3000K 35K 3500K	80CRI 80 CRI 90CRI 90 CRI	OFF² On/Off (Non-Dimming) PDIM Phase Dimmable	SP Spot NFL Narrow Flood FL Flood WFL Wide Flood	BL Black SL Silver WH White	AHR610 BLCK Accessory Holder for R610L/R612L - Black AHR610 WHT Accessory Holder R610L/R612L - White
R612L 37W LED Integral Driver Cylinder	HTEK^{1,2} HTEK 277V Track Adapter TEK¹ TEK 120V Track Adapter GTYPE¹ G-Type Track Adapter HTYPE¹ H-Type Track Adapter LTYPE² L-Type Track Adapter CPY³ Canopy Mounted	40K 4000K					

¹ TEK/HTEK adapter is black on silver finish fixtures. ² HTEK versions available with OFF option only, and OFF option only available with HTEK version only.

³ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	R610L, R612L
Accessory Holder - Black	AHR610 BLCK 275
Accessory Holder - White	AHR610 WHT 275
Clear Glass Lens	CGF 275 CLEAR*
Color Filters	CGF 275*
Dichroic Filters	DGF 275*
Diffusion Lens	DIFF 275*
Uniformity Lens	SOLITE 275*
UV Filter	UVF 275*
Prismatic Spread Lens	PRISM 275*
Linear Spread Lens	LSPREAD 275*
Hexcell Louver	HCLBL 275*
Snoot	SNOOTBL 275*

* Filters, lenses, louver, and snoot require accessory holder for installation.

Trac-Lites™ | LED Series


15W Adjustable Beam Cylinder LED

Adjustable Beam Cylinder R620L

The R620L Series 15W Adjustable Beam LED Cylinder is an affordable track fixture, with a simple and timeless cylindrical aesthetic. It features a proprietary optical system that enables the beam distribution to be adjusted continuously between 17-degrees and 53-degrees simply by rotating the front bezel, without the use of tools or requiring any additional accessories. This makes the R620L perfect for applications that require a range of beam patterns or where the desired beam pattern is unknown at the time of specification/purchase. It delivers up to 1234 lumens and is available in 2700K, 3000K, 3500K and 4000K color temperatures with a minimum 80 CRI. Optional high CRI versions are available with a minimum 90 CRI. The R620L Series LED is available with an optional, bayonet mount accessory holder that accommodates one accessory if desired. It is compatible with Juno Trac-Lites and Trac-Master track and system components, or it can be specified with a variety of factory-assembled alternate mounting adapters to fit on practically any competitive 120V track system.



Dimensions

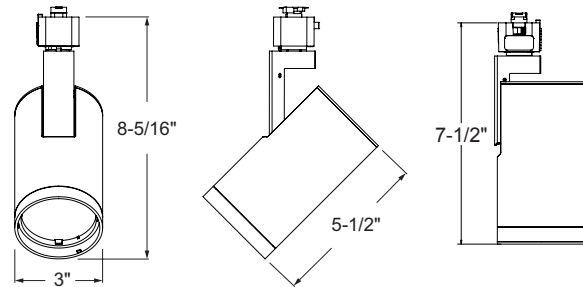

Ordering Information

Ordering Example: R620L HTYPE 30K 90CRI PDIM VBS WH AHR620 WHT

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish	Factory-Installed Accessory Holder Option
R620L 15W LED Adjustable Beam Cylinder	(Blank) Juno Universal 120V Track Adapter	27K 2700K	80CRI 80 CRI 90CRI 90 CRI	PDIM Phase Dimmable	VBS Variable Beam System	BL Black SL Silver WH White	AHR620 BLCK Accessory Holder for R620L - Black AHR620 WHT Accessory Holder for R620L - White
	TEK TEK 120V Track Adapter	30K 3000K					
	GTYPE G-Type Track Adapter	35K 3500K					
	HTYPE H-Type Track Adapter	40K 4000K					
	LTYPE L-Type Track Adapter						
	CPY¹ Canopy Mounted						

¹ CPY versions available with limited options - see specification sheet for CPY ordering information and product dimensions.

Accessories

For Fixtures	R620L
Accessory Holder - Black	AHR620 BLCK 275
Accessory Holder - White	AHR620 WHT 275
Color Filters	CGF 275*
Dichroic Filters	DGF 275*
Diffusion Lens	DIFF 275*
Uniformity Lens	SOLITE 275*
UV Filter	UVF 275*
Prismatic Spread Lens	PRISM 275*
Linear Spread Lens	LSPREAD 275*
Hexcell Louver	HCLBL 275*
Snoot	SNOOTBL 275*

* Filters, lenses, louver, and snoot require accessory holder for installation.

Trac-Lites™ | Line Voltage Spotlights

PAR16/MR16 GU10 Open Back, Round Back Cylinder, Cast Cube, Flare, Odyssey & Bell


Open Back Spotlight



Catalog #	Finish	Lamp
R711 WH	White	120V, 50W max. PAR16/MR16 GU10
R711 BL	Black	

Aiming lock helps retain fixture position during relamping.

Dimensions




Round Back Cylinder



Catalog #	Finish	Lamp
R712 BL	Black	120V, 50W max. PAR16/MR16 GU10

Dimensions




Cast Cube



Catalog #	Finish	Lamp
R714 WH	White	120V, 50W max. PAR16/MR16 GU10
R714 BL	Black	
R714 SC	Satin Chrome	

Aiming locks help retain fixture position during relamping.

Dimensions




Flare



Catalog #	Finish	Lamp
R715 WH	White	120V, 50W max. PAR16/MR16 GU10
R715 BL	Black	
R715 SC	Satin Chrome	
R715 BZ	Bronze	

Dimensions




Odyssey



Catalog #	Finish	Lamp
R717 WH	White	120V, 50W max. PAR16/MR16 GU10
R717 SC	Satin Chrome	

Dimensions




Bell



Catalog #	Finish	Lamp
R718 BZ	Bronze	120V, 50W max. PAR16/MR16 GU10

Integral baffle and deep lamp regression for optimal lamp shielding.
Aiming locks help retain fixture position during relamping.

Dimensions





Trac-Lites™ | Line Voltage Spotlights

Universal & Flared Gimbals



Universal


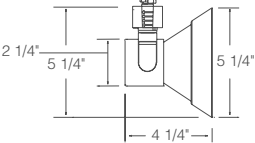
Simplicity and flexibility in a tight-to-the-track design head the list of key features of the Trac-Lites™ Universal fixtures. Use PAR20 lamps for the smallest footprint or PAR30 lamps if more light is desired.

	Catalog #	Finish	Lamp	Dimensions
	R541 WH	White	75W max. PAR20/PAR30	
	R541 BL	Black		

Flared Gimbals

A compact and contemporary appearance is dynamically achieved with the tight-to-the-track Flared Gimbal series. The semi-exposed lamp design gives the fixture a lighter, open aesthetic, similar to traditional gimbal ring fixtures but with a little extra flare. Front relamping is a key feature of the Flared Gimbal series.

	Catalog #	Finish	Lamp	Dimensions
	R531 WH	White	50W max. PAR20	
	R531 BL	Black		
	R531 SC	Satin Chrome		

	Catalog #	Finish	Lamp	Dimensions
	R532 WH	White	75W max. PAR30	
	R532 BL	Black		

Trac-Lites™ | Line Voltage Spotlights

Flared Steps

Flared Steps

A compact and contemporary appearance is dynamically achieved with tight-to-the-track Flared Step fixtures. The enclosed lamp design entirely hides the lamp from view. Front relamping is a key feature of the Flared Step series.

	Catalog # R551 WH R551 BL R551 SC R551 BZ	Finish White Black Satin Chrome Bronze	Lamp 50W max. PAR20	Dimensions 
	Catalog # R552 WH R552 BL R552 SC R552 BZ	Finish White Black Satin Chrome Bronze	Lamp 75W max. PAR30	Dimensions 
	Catalog # R550 WH R550 BL	Finish White Black	Lamp 120W max. PAR38	Dimensions 


The product and system may be covered by the following patents: U.S. Patent D494,306; Canada Patent 2,947

Trac-Lites™ | Line Voltage Spotlights

Round Back & Flat Back Cylinders

Round Back Cylinders

The timeless round back shape accepts a range of R, BR and PAR lamps and provides deep lamp shielding.

	Catalog # R500 WH R500 BL Without Baffle	Finish White Black	Lamp 50W max. R20/PAR20	Dimensions 
	Catalog # R501 WHB WH R501 BLB WH R501 BLB BL R501 BLB PB	Finish White/White Baffle White/Black Baffle Black/Black Baffle Polished Brass/Black Baffle	Lamp 50W max. R20/PAR20	Dimensions 
	Catalog # R502 WHB WH R502 BLB WH R502 BLB BL	Finish White/White Baffle White/Black Baffle Black/Black Baffle	Lamp 75W max. BR30/PAR30/PAR30L	Dimensions 

Flat Back Cylinders

These long-standing traditional lampholders accept a range of R, BR and PAR lamps and provide deep lamp shielding.





	Catalog # R521 WHB WH	Finish White/White Baffle	Lamp 50W max. R20/PAR20	Dimensions 
	Catalog # R522 WHB WH	Finish White/White Baffle	Lamp 75W max. BR30/PAR30/PAR30L	Dimensions 

Trac-Lites™ | Line Voltage Spotlights

Step Cylinders & Open Backs

Step Cylinders

One of the original track lampholder designs, Step Cylinders are still popular for more utilitarian applications. They accept a range of R, BR and PAR lamps and provide deep lamp shielding.

	Catalog # R511 WHB WH R511 BLB BL	Finish White/White Baffle Black/Black Baffle	Lamp 50W max. R20/PAR20	Dimensions 
	Catalog # R512 WHB WH R512 BLB WH R512 BLB BL	Finish White/White Baffle White/Black Baffle Black/Black Baffle	Lamp 75W max. BR30/PAR30/PAR30L Short neck PAR30 requires T599 Socket Extender	Dimensions 

Open Back Spotlights


The most common and basic track fixtures for retail applications, Open Back Spotlight fixtures are ideal where fixture economy is the primary fixture selection factor or PAR38 lamps are needed for longer throws. These fixtures are rear loading.

	Catalog # R533 WH R533 BL	Finish White Black	Lamp 75W max. PAR30	Dimensions 
	Catalog # R534 WH R534 BL	Finish White Black	Lamp 120W max. PAR38	Dimensions 

Trac-Lites™ | System Components

Track Sections & Electrical Feeds

Track Sections




Features

- Trac-Lites track is compatible with both Trac-Lites & Trac-Master fixtures
- Low 1/2" profile fits snugly to ceiling
- Rigid extruded aluminum channel
- Standard solid 12-gauge copper conductors
- 20 Amp capacity
- Debossed polarity line provides visual alignment with fixture and connector polarity arrows
- One circuit only
- Dead end and mounting hardware included
- Can be cut to custom length by installer

Catalog #	Finish	Description
R 2FT WH	White	2' One-Circuit Track
R 2FT BL	Black	(19-7/8" actual length)
R 2FT SL	Silver	
R 2FT BZ	Bronze	
R 4FT WH	White	4' One-Circuit Track
R 4FT BL	Black	(43-7/8" actual length)
R 4FT SL	Silver	
R 4FT BZ	Bronze	
R 6FT WH	White	6' One-Circuit Track
R 6FT BL	Black	(67-7/8" actual length)
R 6FT SL	Silver	
R 6FT BZ	Bronze	
R 8FT WH	White	8' One-Circuit Track
R 8FT BL	Black	(91-7/8" actual length)
R 8FT SL	Silver	
R 8FT BZ	Bronze	

Dimensions




Track Dead End



Track Dead Feed

Catalog #	Finish	Description
R28 WH	White	<ul style="list-style-type: none"> • Only required when terminating extra field cut-off sections • One supplied with track section
R28 BL	Black	
R28 SL	Silver	
R28 BZ	Bronze	




Electrical Feeds



End Feed Connector and Outlet Box Cover

Catalog #	Finish	Description
R21 WH	White	<ul style="list-style-type: none"> • For outlet box feed • Includes outlet box cover, fixture strap, and ground screw
R21 BL	Black	
R21 SL	Silver	
R21 BZ	Bronze	


Dimensions



End Feed Connector

Catalog #	Finish	Description
R38 WH	White	<ul style="list-style-type: none"> • Feeds track from above with Flex or BX • Accepts standard 1/2" electrical connector
R38 BL	Black	
R38 SL	Silver	
R38 BZ	Bronze	
R38 RP WH	White	<ul style="list-style-type: none"> • Same as above except designed for use in opposite polarity orientation compared to standard feed connectors • See specification sheets for more details
R38 RP BL	Black	









Dimensions



Trac-Lites™ | System Components

Electrical Feeds

Electrical Feeds (cont)






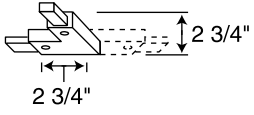






	Catalog #	Finish	Description	Dimensions
Conduit Feed	R34 WH	White	<ul style="list-style-type: none">For surface wiring using standard 1/2" electrical connector	
	R34 BL	Black		
	R34 SL	Silver		
	R34 BZ	Bronze		
	R34 RP WH	White	<ul style="list-style-type: none">Same as above except designed for use in opposite polarity orientation compared to standard feedsSee specification sheets for more details	
R34 RP BL	Black			
	Catalog #	Finish	Description	Dimensions
T-Bar End Feed	R36 WH	White	<ul style="list-style-type: none">Wiring compartment contains standard 1/2" K.O.'sFeeds track from above when 15/16" T-bar is directly above track	
	R36 BL	Black		
	R36 SL	Silver		
	R36 BZ	Bronze		
	R36 RP WH	White	<ul style="list-style-type: none">Same as above except designed for use in opposite polarity orientation compared to standard feedsSee specification sheets for more details	
	Catalog #	Finish	Description	Dimensions
Floating Electrical Feed	R29 WH	White	<ul style="list-style-type: none">Permits mounting at any point along track at outlet boxIncludes floating connector, outlet box cover, and track dead end	
	R29 BL	Black		
	R29 SL	Silver		
	R29 BZ	Bronze		
	Catalog #	Finish	Description	Dimensions
Cord and Plug Connector	R22 WH	White	<ul style="list-style-type: none">15' 2-wire white cordIncludes surface wire retainers and in-line switch7 Amp maximumNot UL Rated	
	R22 BL	Black		
	R22 SL	Silver		
	R22 BZ	Bronze		
	R122 WH	White	<ul style="list-style-type: none">Same as above but with three wires and matching color cordsNo switch7 Amp maximumNot UL Rated	
R122 BL	Black			
R122 SL	Silver			
R122 BZ	Bronze			

The product and system may be covered by the following United States patent: US 5,259,774

Trac-Lites™ | System Components

Connectors


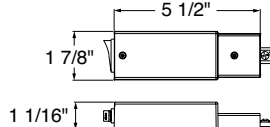

Connectors


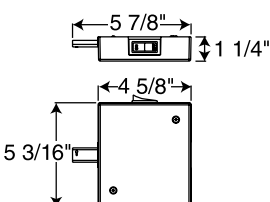
 Miniature Straight Connector	Catalog #	Finish	Description	Dimensions
	R23 WH	White	• Joins two track sections end to end	
	R23 BL	Black		
	R23 SL	Silver		
	R23 BZ	Bronze		
 Flexible Adjustable Joiner	Catalog #	Finish	Description	Dimensions
	R20 WH	White	• Joins two track sections	
	R20 BL	Black	• Can flex to 90° to the left, right, up or down	
	R20 SL	Silver		
	R20 BZ	Bronze		
 Adjustable Connector	Catalog #	Finish	Description	Dimensions
	R24 WH	White	• Joins two track sections to make a 90° angle or straight run	
	R24 BL	Black		
	R24 SL	Silver	• T27 required for junction box feed	
	R24 BZ	Bronze	• Straight and right angle covers supplied	
 "T" Connector	Catalog #	Finish	Description	Dimensions
	R25 WH	White	• Joins three track sections	
	R25 BL	Black	• T27 required for junction box feed	
	R25 SL	Silver		
	R25 BZ	Bronze		
	R25 RP WH	White	• Same as above except designed for use in opposite polarity orientation compared to standard connectors	
	R25 RP BL	Black		
	R25 RP SL	Silver		
	R25 RP BZ	Bronze	• See specification sheets for more details	
 Outlet Box Cover	Catalog #	Finish	Description	Dimensions
	T27 WH	White	• Use with R24 and R25 for outlet box electrical feed	
	T27 BL	Black	• Includes nipple, locknut, and ground screw	
	T27 SL	Silver		
	T27 BZ	Bronze		
 Track Continuation Kit	Catalog #	Finish	Description	Dimensions
	R49 WH	White	• Two conduit adapters (one left R34 and one right R34) to continue track run around or thru obstructions	
	R49 BL	Black		
	R49 SL	Silver		
	R49 BZ	Bronze	• Use with standard 1/2" electrical connectors	


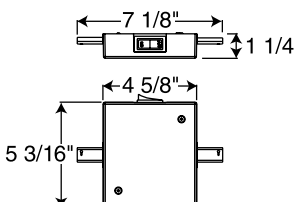
Trac-Lites™ | System Components

Current Limiting Feeds & Circuit Breakers

Current Limiting Feeds


	Catalog #	Finish	Track Type	Description	Dimensions
 <p>Mini End Feed</p>	RCLFM11 WH	White	1-Circuit	Mini End Feed	
	RCLFM11 BL	Black			
	RCLFM11 SL	Silver			
	RCLFM11 BZ	Bronze			
	RCLFM11 RP WH	White	1-Circuit	Same as above except designed for use in opposite polarity orientation compared to standard feeds – see specification sheets for more details	
	RCLFM11 RP BL	Black			
	RCLFM11 RP SL	Silver			
	RCLFM11 RP BZ	Bronze			

	Catalog #	Finish	Track Type	Description	Dimensions
 <p>End Feed</p>	RCLF11 RP WH	White	1-Circuit	End Feed	
	RCLF11 RP BL	Black			

	Catalog #	Finish	Track Type	Description	Dimensions
 <p>In-Line Feed</p>	RCLF21 RP WH	White	1-Circuit	In-Line Feed	
	RCLF21 RP BL	Black			

Current Limiting Circuit Breakers - Order Separately

Example: **RCLF11 BL** and **TCLCB 5A BLCK**

	Catalog #	Dimensions	Descriptions	Wattage	Finish
	TCLCB 0.5A		0.5A Current Limiting Circuit Breaker	60W	WHT, BLCK
	TCLCB 1A		1A Current Limiting Circuit Breaker	120W	WHT, BLCK
	TCLCB 2A		2A Current Limiting Circuit Breaker	240W	WHT, BLCK
	TCLCB 3A		3A Current Limiting Circuit Breaker	360W	WHT, BLCK
	TCLCB 4A		4A Current Limiting Circuit Breaker	480W	WHT, BLCK
	TCLCB 5A		5A Current Limiting Circuit Breaker	600W	WHT, BLCK
	TCLCB 6A		6A Current Limiting Circuit Breaker	720W	WHT, BLCK
	TCLCB 7A		7A Current Limiting Circuit Breaker	840W	WHT, BLCK
	TCLCB 8A		8A Current Limiting Circuit Breaker	960W	WHT, BLCK
	TCLCB 10A		10A Current Limiting Circuit Breaker	1200W	WHT, BLCK
	TCLCB 12A		12A Current Limiting Circuit Breaker	1440W	WHT, BLCK
	TCLCB 14A		14A Current Limiting Circuit Breaker	1680W	WHT, BLCK

Trac-Lites™ | System Components

Current Limiting Feeds & Subpanels

Current Limiting Pendant Stem Kits

Current Limiting Pendant Stem Kits combine the functionality of pendant mounting with the ability to feed the track with current limiting in an attractive, integrated solution.




T-Bar Ceiling Mount

Catalog #	Finish
T90CLF 12IN BL	Black
T90CLF 12IN SL	Silver
T90CLF 12IN WH	White
T90CLF 18IN BL	Black
T90CLF 18IN SL	Silver
T90CLF 18IN WH	White
T90CLF 24IN BL	Black
T90CLF 24IN SL	Silver
T90CLF 24IN WH	White
T90CLF 36IN BL	Black
T90CLF 36IN SL	Silver
T90CLF 36IN WH	White
T90CLF 48IN BL	Black
T90CLF 48IN SL	Silver
T90CLF 48IN WH	White

Description

- Compatible with 15/16" flush T-bar ceilings
- 12", 18", 24", 36", 48" stem lengths
- Includes mounting plate, canopy, stem and wireway cover (order R38 track feed connector and current limiting circuit breaker separately – see page 115)

Dimensions

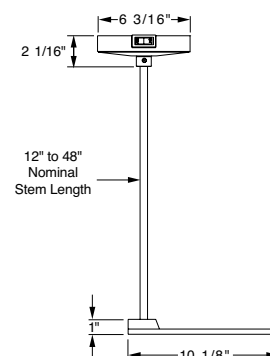


Rigid Ceiling Mount

Catalog #	Finish
T91CLF 12IN BL	Black
T91CLF 12IN SL	Silver
T91CLF 12IN WH	White
T91CLF 18IN BL	Black
T91CLF 18IN SL	Silver
T91CLF 12IN WH	White
T91CLF 24IN BL	Black
T91CLF 24IN SL	Silver
T91CLF 24IN WH	White
T91CLF 36IN BL	Black
T91CLF 36IN SL	Silver
T91CLF 36IN WH	White
T91CLF 48IN BL	Black
T91CLF 48IN SL	Silver
T91CLF 48IN WH	White

Description

- Compatible with 15/16" flush T-bar ceilings
- 12", 18", 24", 36", 48" stem lengths
- Includes mounting plate, canopy, stem and wireway cover (order R38 track feed connector and current limiting circuit breaker separately – see page 115)

Dimensions

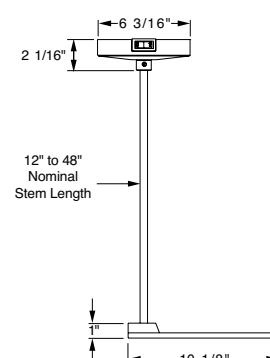

Current Limiting Subpanel

The SilverBullet is a "sub-branch circuit current limiter" for track lighting that enforces a definite current limit to lower the VA rating of each track lighting circuit and meet code requirements. Use of a current limiting subpanel is often a more cost-effective method of employing current limiting, especially for applications with more than 10 circuits to limit.

See page 90 for more details.



Trac-Lites™ | System Components



Mounting Accessories

Pendant Stem Kits

Pendant Stem kits enable the track to be mounted at ideal heights, without having to lower the entire ceiling plane. Stems can be specified in a variety of different lengths and can be joined for higher ceiling applications.

	Catalog #	Finish	Description	Dimensions
 <p>T-Bar Pendant Stem Kit</p>	T90 12IN WH	White	<ul style="list-style-type: none"> Compatible with 15/16" flush T-bar ceilings 12", 18", 24", 36", 48" stem lengths Use two for 2', 4', or 6' track, or three for 8' track For electrical feed, order Wireway Cover T93 and R38 	
	T90 12IN BL	Black		
	T90 12IN SL	Silver		
	T90 12IN BZ	Bronze		
	T90 18IN WH	White		
	T90 18IN BL	Black		
	T90 18IN SL	Silver		
	T90 18IN BZ	Bronze		
	T90 24IN WH	White		
	T90 24IN BL	Black		
	T90 24IN SL	Silver		
	T90 24IN BZ	Bronze		
	T90 36IN WH	White		
	T90 36IN BL	Black		
	T90 36IN SL	Silver		
	T90 36IN BZ	Bronze		
	T90 48IN WH	White		
	T90 48IN BL	Black		
	T90 48IN SL	Silver		
	T90 48IN BZ	Bronze		

	Catalog #	Finish	Description	Dimensions
 <p>Rigid Ceiling Pendant Stem Kit</p>	T91 12IN WH	White	<ul style="list-style-type: none"> Compatible with rigid ceilings 12", 18", 24", 26", 48" stem lengths Use two for 2', 4', or 6' track, or three for 8' track For electrical feed, order Wireway Cover T93 and R38 	
	T91 12IN BL	Black		
	T91 12IN SL	Silver		
	T91 12IN BZ	Bronze		
	T91 18IN WH	White		
	T91 18IN BL	Black		
	T91 18IN SL	Silver		
	T91 18IN BZ	Bronze		
	T91 24IN WH	White		
	T91 24IN BL	Black		
	T91 24IN SL	Silver		
	T91 24IN BZ	Bronze		
	T91 36IN WH	White		
	T91 36IN BL	Black		
	T91 36IN SL	Silver		
	T91 36IN BZ	Bronze		
	T91 48IN WH	White		
	T91 48IN BL	Black		
	T91 48IN SL	Silver		
	T91 48IN BZ	Bronze		

	Catalog #	Finish	Description	Dimensions
 <p>Feed Wireway Cover</p>	T93 WH	White	<ul style="list-style-type: none"> Use one for each T90 or T91 when using stem for feeding track Feed at R38 or R24 Conceals electrical feed wires from stem to track 	
	T93 BL	Black		
	T93 SL	Silver		
	T93 BZ	Bronze		


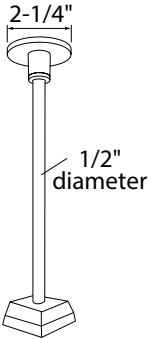
Trac-Lites™ | System Components



Pendant Stem Kits



Mounting Accessories (cont)

Pendant Stem kits enable the track to be mounted at ideal heights, without having to lower the entire ceiling plane. Stems can be specified in a variety of different lengths and can be joined for higher ceiling applications.

Pendant Stem Support Kits

	Catalog #	Finish	Description	Dimensions
 <p>Pendant Stem Mechanical Support Kit</p>	T9091M 12IN WH	White	<ul style="list-style-type: none"> For mechanical support only (no feed) Suspends track from T-bar or rigid ceilings Offers simpler installation and a smaller ceiling footprint 12", 18", 24", 36", 48" stem lengths Use two for 2', 4', or 6' of track or three for 8' and four for 12' of track Includes Mini-Canopy, pendant stem, 1-5/16" T-bar clip, drywall anchor and track mounting hardware 	
	T9091M 12IN BL	Black		
	T9091M 12IN SL	Silver		
	T9091M 18IN WH	White		
	T9091M 18IN BL	Black		
	T9091M 18IN SL	Silver		
	T9091M 24IN WH	White		
	T9091M 24IN BL	Black		
	T9091M 24IN SL	Silver		
	T9091M 36IN WH	White		
	T9091M 36IN BL	Black		
	T9091M 36IN SL	Silver		
	T9091M 48IN WH	White		
	T9091M 48IN BL	Black		
	T9091M 48IN SL	Silver		





	Catalog #	Finish	Description	
 <p>Pendant Stem Threaded Coupling</p>	T96 WH	White	<ul style="list-style-type: none"> Enables multiple pendant stems to be joined for higher ceiling applications 	
	T96 BL	Black		
	T96 SL	Silver		
	T96 BZ	Bronze		

	Catalog #	Finish	Description	
 <p>Pendant Slope Ceiling Adapter</p>	T94 WH	White	<ul style="list-style-type: none"> Permits pendant track stem to be hung vertically from sloped ceiling Use pendant kits (T90, T91) Will allow feeding of electrical wires to track at up to a 60° angle 	
	T94 BL	Black		
	T94 SL	Silver		
	T94 BZ	Bronze		





Trac-Lites™ | Accessories

Mounting Accessories

Cable Suspension Kit

 <p>T-Bar/Rigid Ceiling Cable Suspension Kit</p>	Catalog # T595 48IN WH T595 48IN BL T595 144IN WH T595 144IN BL	Finish White Black White Black	Description <ul style="list-style-type: none"> • Mechanical-only cable suspension kit for one-circuit or two-circuit track • Adjustable 48" or 144" cable • For use on 15/16" T-bar ceiling 	
	T597 48IN WH T597 48IN BL T597 144IN WH T597 144IN BL	White Black White Black	<ul style="list-style-type: none"> • Mechanical-only cable suspension kit for one-circuit or two-circuit track • Adjustable 48" or 144" cable • For use on rigid ceiling 	
 <p>T-Bar/Rigid Ceiling Cable Suspension/Feed Kit</p>	Catalog # T596 48IN WH T596 48IN BL T596 144IN WH T596 144IN BL	Finish White Black White Black	Description <ul style="list-style-type: none"> • Cable suspension kit with 48" or 144" electrical feed for one-circuit track • For use on 15/16" T-bar ceiling 	
	T598 48IN WH T598 48IN BL T598 144IN WH T598 144IN BL	White Black White Black	<ul style="list-style-type: none"> • Cable suspension kit with 48" or 144" electrical feed for one-circuit track • For use on rigid ceiling 	








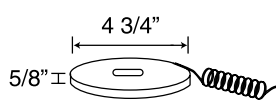
Mounting Accessories

	Catalog # R37F R37D R37916	Description <ul style="list-style-type: none">• To attach track to inverted tee ceiling• Use two for 2' or 4' track or three for 6' or 8' track• R37F T-Bar Clip is compatible with flush tile 15/16" inverted T-bar ceiling• R37D T-Bar Clip is compatible with drop tile 15/16" inverted T-bar ceiling• R37916 T-Bar Clip is compatible with drop tile or flush tile 9/16" inverted T-Bar ceiling		
T-Bar Attachment Clip				
	Catalog # T56 WH T56 BL T56 SL T56 BZ	Finish White Black Silver Bronze	Description <ul style="list-style-type: none">• Attaches solid 5/16" threaded rod to track• Includes plastic cap, mounting bracket, and hardware• Rod not supplied	
Solid Rod Pendant Mounting Kit				
	Catalog # T95 WH T95 BL	Finish White Black	Description <ul style="list-style-type: none">• Attaches to track, permitting Juno Trac-Master and Trac-Lites fixtures using the standard square Super Adapter to be hung vertically from sloped ceiling• 90° maximum adjustment	Dimensions 
Slope Ceiling Fixture Adapter				

Trac-Lites™ | Accessories

Mounting Accessories

Mounting Accessories (cont)

 <p>Monopoint - Line Voltage</p>	Catalog # R40N WH R40N BL R40N BZ R40N SL	Finish White Black Bronze Silver	Description <ul style="list-style-type: none"> • Accepts Juno Trac-Master & Trac-Lites 120V track fixtures • Mounts directly to outlet box 	Dimensions 
 <p>Line Voltage Monopoint-Flush Mount</p>	Catalog # T40F WH T40F BL	Finish White Black	Description <ul style="list-style-type: none"> • Mounts directly to 4" outlet box only • Accepts Juno Trac-Master & Trac-Lites 120V track fixtures using the standard square Super Adapter 	Dimensions 
 <p>Line Voltage Duopoint</p>	Catalog # T41N WH T41N BL	Finish White Black	Description <ul style="list-style-type: none"> • Mounts directly to outlet box • Accepts two Juno Trac-Master or Trac-Lites 120V track fixtures 	Dimensions 
 <p>Weighted Base</p>	Catalog # T42N WH T42N BL	Finish White Black	Description <ul style="list-style-type: none"> • Heavy base enables track fixture to be placed on a horizontal surface (i.e. floor, shelf) and aimed upwards • Accepts Juno Trac-Master & Trac-Lites 120V track fixtures • Supplied with 8' cord and plug for portable use 	Dimensions 

Trac-Lites™ | Accessories

Extension Wands & Special Mounting Accessories

Line Voltage Extension Wands

Extension wands suspend fixtures precisely where they are needed without lowering the track section. On/Off switch is standard. Line voltage extension wands suspend most Juno Trac-Master and Trac-Lites line voltage track fixtures from all 120V Juno Trac-Master and Trac-Lites track. They are designed for use with the standard square Super Adapter found on most Trac-Master and Trac-Lites fixtures. Always confirm the fixture adapter type before specifying an extension wand to ensure compatibility. May also be used with Trac-Master and Trac-Lites Monopoints designed to accept Juno 120V track fixtures. For sloped ceiling applications, use TEWS versions.



Line Voltage

Line Voltage Extension Wands		
Super Adapter Catalog #	Finish	Overall Length
TEW 12IN WH	White	13 1/2"
TEW 12IN BL	Black	
TEW 18IN WH	White	19 1/2"
TEW 18IN BL	Black	
TEW 18IN SL	Silver	
TEW 24IN WH	White	25 1/2"
TEW 24IN BL	Black	
TEW 24IN SL	Silver	
TEW 36IN WH	White	37 1/2"
TEW 36IN BL	Black	
TEW 48IN WH	White	49 1/2"
TEW 48IN BL	Black	
TEWS WH*	White	28 1/2"
TEWS BL*	Black	

* 24IN wand with slope adapter on top.

Miscellaneous Track Accessories



Pendant Adapter

Note: T31N is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.

Catalog #	Finish	Description	Dimensions
T31N WH	White	<ul style="list-style-type: none"> Adapts swag or chain-hung fixture to track Includes strain relief for 3-wire cord (replaces chain loop) Chain installation accepts wire diameters up to 0.270" and supports up to 15 lbs.; strain relief installation requires Type SVT 18/3 3-wire cord and supports up to 5 pounds. UL Listed 5A max 	
T31N BL	Black		
T31N SL	Silver		



Planter or Utility Hook

Catalog #	Finish	Description	Dimensions
T32 WH	White	<ul style="list-style-type: none"> Supports up to 25 lbs. Not UL Listed 	
T32 BL	Black		



Outlet Adapter

Catalog #	Finish	Description	Dimensions
T33 WH	White	<ul style="list-style-type: none"> Provides electrical receptacle Not UL Listed 7A max 	
T33 BL	Black		
T33 SL	Silver		

Trac-Lites™ | Accessories

Coil Cord Clamp-Ons & Outrigger Mounting Bracket

Coil Cord Clamp-Ons with Monopoint

Coil cord clamp-ons provide an innovative way to mount fixtures to pipe and flat surfaces up to 1 1/2" thick. Designed with futuristic styling in mind for dynamic displays and special mounting situations.



Track Line Voltage Coil Cord Clamp-On

Super Adapter Catalog

T132 WH
T132 BL


Finish

White
Black

Description

- Attaches to Juno 120V Trac-Master & Trac-Lites 120V and Monopoints
- Accepts Juno Trac-Master & Trac-Lites 120V track (confirm fixture adapter type before specifying to ensure compatibility)
- Includes On/Off switch
- 2' coil cord extends to 5'

Dimensions



Plug-In Line Voltage Coil Cord Clamp-On

Super Adapter Catalog

T133 WH
T133 BL


Finish

White
Black

Description

- With coil cord and male plug (for standard 120V receptacle)
- Accepts Juno Trac-Master & Trac-Lites 120V track fixtures (confirm fixture adapter type before specifying to ensure compatibility)
- Includes On/Off switch
- 2' coil cord extends to 5'

Dimensions



Outrigger Track Mounting Bracket (non-electrified)



Outrigger Track Mounting Bracket

Catalog

T47 WH
T47 BL

Finish

White
Black

Description

- For mounting track out from wall
- Use two for 2', 4' or 6' track sections, three for 8' sections, four for 12' sections
- Order track and track connectors separately
- For portable electric feed, use R22 or R122 Cord Set
- For permanent wiring, use R38 Live End Feed

Dimensions

24"L x 8"H

Trac-Lites™ | Kits

Track Kits

Track Kits

Packed to go. The most popular models supplied in simple-to-install pre-packaged kits.



Line Voltage Conical LED Track Kits



Description

- Kit includes three (3) universal beam R600L 10W LED track fixtures, one 4' Trac-Lites track section, one floating electrical feed and mounting hardware.
- Kits are available in all R600L CCTs, CRIs and finishes to suit any retail, commercial or residential application.

Ordering Information

Ordering Example: R4K3600L 27K 90CRI PDIM UNF BZ








Series	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
R4K3600L Trac-Lites R600LTrac Kit	27K 2700K	80CRI 80 CRI	PDIM Phase Dimmable	UNF Universal - Narrow Flood, Flood	BL Black
	30K 3000K	90CRI 90 CRI			SL Silver
	35K 3500K	97CRI ¹ 97 CRI			WH White
	40K 4000K				

¹ Special order - may have extended lead-times or order minimums; not available in 35K.

Trac-Lites™ | Accessories

Light Control Accessories

The Juno complete range of light control accessories permit the designer to custom tailor effects. See individual fixture pages and specification sheets for additional details.

Accessory Holders		2" DIAMETER	COMPATIBLE WITH	2-3/4" DIAMETER	COMPATIBLE WITH
	Required for fixtures shown to use accessories.	AHR605 BLCK	R605L, R606L	AHR610 BLCK	R610L, R612L
		AHR605 WHT		AHR610 WHT	
				AHR620 BLCK	R620L
				AHR620 WHT	
	These alter the light distribution, enlarging or elongating it, softening the beam edge or removing striations.	Prismatic Spread Lens	Fixtures with AHR605 Accessory Holder	PRISM 275	Fixtures with AHR610 or AHR620 Accessory Holder
		Linear Spread Lens		LSPREAD 275	
		Uniformity Lens (Solite™)		SOLITE 275	
		Diffusion Lens		DIFF 275	
	These museum quality lenses filter out ultraviolet radiation below 400 nanometers to protect fade sensitive art and objects from light degradation.	UV Filter	UVF 200	UVF 275	
Dichroic Color Correction Filters					
	Color Correction Filters correct the light, to warm it up to approximate incandescent.	Halogen-to-Incandescent, 2700K	DCCF 200 HAL2700		
Color Filters		Dichroic Glass Filters			
	Color Filters change white light into colored light and are available in colored glass and more efficient/saturated dichroic filters.	Red	DGF 200 DRED	DGF 275 DRED	
		Medium Green	DGF 200 MGRN	DGF 275 MGRN	
		Medium Blue	DGF 200 MBLU	DGF 275 MBLU	
		Yellow	DGF 200 DYEL	DGF 275 DYEL	
		Magenta	DGF 200 MAGEN	DGF 275 MAGEN	
		Blue-Green (Cyan)	DGF 200 CYAN	DGF 275 CYAN	
		Colored Glass Filters			
		Medium Pink	CGF 200 MPINK	CGF 275 MPINK	
		Warm Red	CGF 200 WRED	CGF 275 WRED	
		Daylight Blue	CGF 200 DLTBLUE	CGF 275 DLTBLUE	
		Medium Blue	CGF 200 MBLU	CGF 275 MBLU	
		Medium Amber	CGF 200 MAMB	CGF 275 MAMB	
		Medium Green	CGF 200 MGRN	CGF 275 MGRN	
Louvers					
	Louvers provide greater visual source cut-off and reduce perceived fixture brightness.	Hexcell Louvers	HCLBL 200	HCLBL 275	
Snoots					
	Snoots extend lamp shielding and can reduce spill light at the edge of a beam pattern.	Snoots	SNOOTBL 200	SNOOTBL 275	

Solite™ is a trademark of AGC Solar.

HD Commercial Track

Juno® HD Commercial Track Lighting System

2-Circuit/2-Neutral

Superior performance for dimmed lighting, low life-cycle cost, and high power-handling capability make the Juno HD Commercial Track System an excellent choice.


This 2-circuit/2-neutral track system is ideal for dimming intensive applications. The independent neutrals guarantee that the two circuits are completely isolated. The potential for cross-circuit interference and neutral harmonics is completely eliminated, essential for trouble-free dimming. The lack of harmonics ensures superior fixture performance and longer equipment life.

Juno HD Commercial Track is engineered to be durable, dependable, and simple to install. The track's extruded aluminum construction and continuously crimped conductors ensure mechanical strength and electrical reliability. The integral suspension rail and pre-drilled mounting holes of the track simplify installation



HD Commercial Track | Track System Components

120V, 2-Circuit/2-Neutral Track System

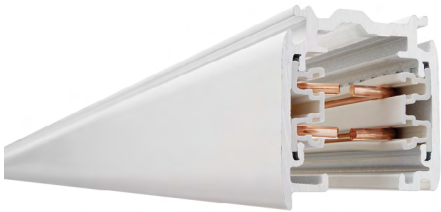

Description

Juno HD Commercial 2-Circuit/2-Neutral Track is ideal for dimming intensive applications. The independent neutrals guarantee that the two circuits are completely isolated. The potential for cross-circuit interference and neutral harmonics is completely eliminated to ensure trouble-free dimming. The HD Commercial 2-Circuit/2-Neutral Track's extruded aluminum construction and continuously crimped conductors ensure mechanical strength and electrical reliability. Its integral suspension rail and pre-drilled mounting holes simplify installation. A wide variety of Juno Trac fixtures may be specified for use with the HD Commercial Track system.

Labels UL Listed • cUL Listed • Current Limiting Feeds approved by the California Energy Commission to meet requirements of Title 24 • Current Limiting Feeds comply with ASHRAE 90.1 and IECC Section 805.5.1.4 for track current limiting.

Features

Construction Rugged, heavy gauge extruded aluminum channel • Integral polarity ridge ensures proper connector and fixture installation

Electrical Each circuit is rated for 20 Amp, 120 Volt operation • Track extrusion serves as 100% capacity ground

Fixture Adapter Supplied with track fixture • Integrally polarized construction to prevent reverse installation – only allows insertion in proper orientation • Rotary circuit selector enables simple switching between circuits • Integral on/off switch enables individual fixtures to be switched for servicing

Installation May be installed in linear or grid configurations • Track sections can be cut in the field


Mounting May be mounted directly to hard ceiling using suitable anchors (supplied by others) at pre-drilled mounting holes or using SKB10 Mounting Clip and integral suspension rail • May be mounted to T-bar ceiling using appropriate SKBT12 or SKBX12 Mounting Clips and integral suspension rail • Can also be suspended from ceilings using SPUS Pendant Stem Kits, SKB34 Cable Suspension Kits or 1/4"-20 threaded rod (by others) • Mounting points should be spaced no further than 4' apart and within 6" of any track feed point, junction or end point.

Track Sections



Catalog #	Finish	Description
TEK4 4FT WH	White	4' Track section.
TEK4 4FT BL	Black	2-circuit, 120V, 48" length
TEK4 8FT WH	White	8' Track section.
TEK4 8FT BL	Black	2-circuit, 120V, 96" length
TEK4 12FT WH	White	12' Track section.
TEK4 12FT BL	Black	2-circuit, 120V, 144" length

Dimensions



Connectors



End Feed - Left Polarity

Catalog #	Finish	Description
TEK11 WH	White	Enables feeding of TEK Track from top. Use as Conduit End Feed also.
TEK11 BL	Black	



End Feed - Right Polarity

Catalog #	Finish	Description
TEK12 WH	White	Enables feeding of TEK Track from top. Use as Conduit End Feed also.
TEK12 BL	Black	



Center Feed

Catalog #	Finish	Description
TEK14 WH	White	Joins two TEK Track sections in-line both electrically and mechanically. Enables feeding of TEK Track from top at intersection.
TEK14 BL	Black	




Miniature Straight Connector


Catalog #	Finish	Description
TEK21 WH	White	Joins two TEK Track sections in-line both electrically and mechanically.
TEK21 BL	Black	

HD Commercial Track | Track System Components

Connectors

Connectors

 Current Limiting End Feed - Left Polarity	Catalog #	Finish	Description
	TEK11CL WH TEK11CL BL	White Black	Enables feeding of TEK Track from top. Requires one or two TEKCL Current Limiters to provide track current limiting per national, state and local energy codes.






 Current Limiting End Feed - Right Polarity	Catalog #	Finish	Description
	TEK12CL WH TEK12CL BL	White Black	Enables feeding of TEK Track from top. Requires one or two TEKCL Current Limiters to provide track current limiting per national, state and local energy codes.



Plug-In Current Limiters

For use with TEK11CL or TEK12CL Current Limiting End Feeds



Catalog #	Finish	Description	Wattage
TCLCB 0.5A WHT	White	0.5A Current Limiting Circuit Breaker	60W
TCLCB 0.5A BLCK	Black		
TCLCB 1A WHT	White	1A Current Limiting Circuit Breaker	120W
TCLCB 1A BLCK	Black		
TCLCB 2A WHT	White	2A Current Limiting Circuit Breaker	240W
TCLCB 2A BLCK	Black		
TCLCB 3A WHT	White	3A Current Limiting Circuit Breaker	360W
TCLCB 3A BLCK	Black		
TCLCB 4A WHT	White	4A Current Limiting Circuit Breaker	480W
TCLCB 4A BLCK	Black		
TCLCB 5A WHT	White	5A Current Limiting Circuit Breaker	600W
TCLCB 5A BLCK	Black		
TCLCB 6A WHT	White	6A Current Limiting Circuit Breaker	720W
TCLCB 6A BLCK	Black		
TCLCB 7A WHT	White	7A Current Limiting Circuit Breaker	840W
TCLCB 7A BLCK	Black		
TCLCB 8A WHT	White	8A Current Limiting Circuit Breaker	960W
TCLCB 8A BLCK	Black		
TCLCB 10A WHT	White	10A Current Limiting Circuit Breaker	1200W
TCLCB 10A BLCK	Black		
TCLCB 12A WHT	White	12A Current Limiting Circuit Breaker	1440W
TCLCB 12A BLCK	Black		
TCLCB 14A WHT	White	14A Current Limiting Circuit Breaker	1680W
TCLCB 14A BLCK	Black		

 Adjustable Connector	Catalog #	Finish	Description
	TEK24 WH TEK24 BL	White Black	Capable of joining two TEK Track sections at 90° to 180°. Ideal for applications where using an "L" connector is not practical; also useful for installing track around curved architectural details.
 90° "L" Connector	Catalog #	Finish	Description
	TEK34 WH TEK34 BL	White Black	Joins TEK Track sections to make a 90° angle with continued electrical feed. May be used to feed TEK Track from top.
 "X" Connector	Catalog #	Finish	Description
	TEK38 WH TEK38 BL	White Black	Joins four TEK Track sections to make an "X" intersection with continued electrical feed. May be used to feed TEK Track from top.
 "T" Connector - Adjustable Right Polarity	Catalog #	Finish	Description
	TEK39 WH TEK39 BL	White Black	Joins three TEK Track sections to make a "T" intersection with continued electrical feed. May be used to feed TEK Track from top.
 "T" Connector - Adjustable Left Polarity	Catalog #	Finish	Description
	TEK40 WH TEK40 BL	White Black	Joins three TEK Track sections to make a "T" intersection with continued electrical feed. May be used to feed TEK Track from top.







HD Commercial Track | Track System Components

Connectors and Accessories

Connectors (cont)

 <p>Dead End</p>	Catalog #	Finish	Description
	TEK41 WH TEK41 BL	White Black	Not supplied with TEK Track sections – must be ordered separately.
 <p>Outlet Box Cover</p>	Catalog #	Finish	Description
	GES15 WH GES15 BL	White Black	Thermoplastic outlet box cover for use when feeding TEK Track directly over outlet box using TEK11, TEK12, TEK14, TEK34, TEK38, TEK39 or TEK40.



Accessories

 <p>Mounting Bracket</p>	Catalog #	Finish	Description
	SKB10 WH SKB10 BL	White Black	For mounting track direct to ceiling.
 <p>Mounting Bracket</p>	Catalog #	Finish	Description
	SKBT12 WH SKBT12 BL	White Black	For mounting track to 15/16" flush tile T-bar ceiling.
 <p>Mounting Bracket</p>	Catalog #	Finish	Description
	SKBX12 WH SKBX12 BL	White Black	For mounting track to 15/16" drop tile recessed T-bar ceiling.
 <p>Ceiling Cup Kit</p>	Catalog #	Finish	Description
	SKB30 WH SKB30 BL	White Black	Use to suspend TEK Track from the ceiling when using steel cable or threaded rod. Included bracket provides suspension attachment point and ceiling cup covers the bracket for an aesthetically pleasing result. Combine with SP4P and SKB34 or 1/4"-20 threaded rod (supplied by others) for a complete suspension solution.
 <p>Suspension Cable Kit</p>	Catalog #	Length	Description
	SKB34 5FT SKB34 9FT	5ft. cable 9ft. cable	Use to suspend TEK Track from the ceiling with supplied 5' or 9' steel cable. Includes cable and cable adjustment fitter. Combine with SP4P and SKB30 for a complete suspension solution.
 <p>Mounting Stem Kit</p>	Use to suspend TEK Track from the ceiling. Combine with SP4P for suspension-only points. Mounts to ceiling j-box. Available in 12", 18", 24" and 48" lengths.		
	Catalog #	Finish	Description
	SPUS 12IN WH SPUS 12IN BL	White Black	12" stem length
	SPUS 18IN WH SPUS 18IN BL	White Black	18" stem length
	SPUS 24IN WH SPUS 24IN BL	White Black	24" stem length
	SPUS 48IN WH SPUS 48IN BL	White Black	48" stem length

HD Commercial Track | Track System Components

Accessories and Compatible Fixtures

Accessories (cont)

	Catalog # SP4P WH SP4P BL	Finish White Black	Description Use with SPUS Stem Kit or SKB34 Cable Kit or 1/4"-20 threaded rod (supplied by others) to suspend TEK Track except at feed or connection points.
Universal Suspension Coupler			
	Catalog # XTSV12	Description All-in-one hand tool bends the track conductors and measures the correct length to ensure proper electrical contact when track sections are cut in the field.	
Track Conductor Bending Tool			

TEK HD Commercial Track Compatible Fixtures

A variety of Juno Trac fixture designs can be adapted to operate with the Juno TEK HD Commercial Track system. Each fixture has a factory-assembled 2-circuit track adapter that is uniquely keyed to the 120V HD Commercial Track system. To order, simply follow the Series with the "TEK" Mounting Adapter Type option in the standard fixture catalog number to indicate fixtures for use with the TEK HD Commercial Track system.

Compatible fixture families include (consult factory for additional choices):


R610L, R612L Integral Driver LED Cylinders
R620L Adjustable Beam LED Cylinder
T254L, T255L LED Cylindra
T256L, T257L, T258L, T259L, T260L LED Flood/Wall Washers
T261L, T262L, T263L, T265L, T267L LED Conix II Series
T271L, T272L LED Arc Series
T283L, T285L, T286L LED Cylinders with Integral Driver
T381L, T382L, T383L, T385L, T387L, T388L LED Vertical Cylinder Series
T690 Open Back Gimbals (Front Loading)
T1020, T1030, T1031S, T1038 Die Cast Gimbals
T1050L, T1051L, T1052L, T1053L, T1054L, T1056L, T1058L LED Flood/Wall Washers

Ordering Examples: "T261L G3 30K 80CRI PDIM SP BL" becomes "T261L TEK G3 30K 80CRI PDIM SP BL"
 and "T1030 E26 75W WH" becomes "T1030 TEK E26 75W WH"


HD Commercial Track | Track System Components

Track Configurations

Possible Track Configuration & Recommended Components

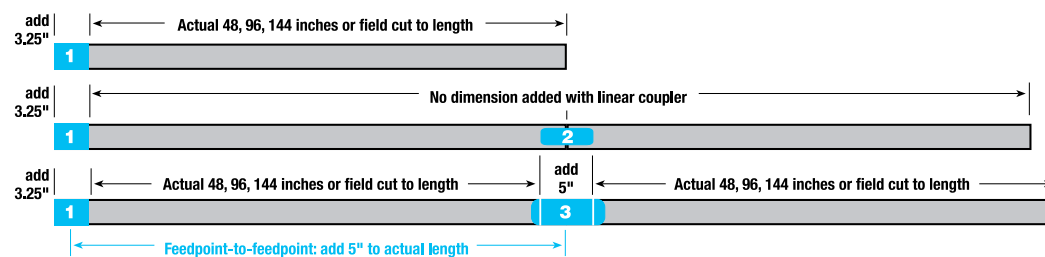


1. **TEK11** End Feed (left) - standard
TEK12 End Feed (right)
 (used for conduit feed also)
2. **TEK21** Miniature Straight Connector
3. **TEK14** Center Feed

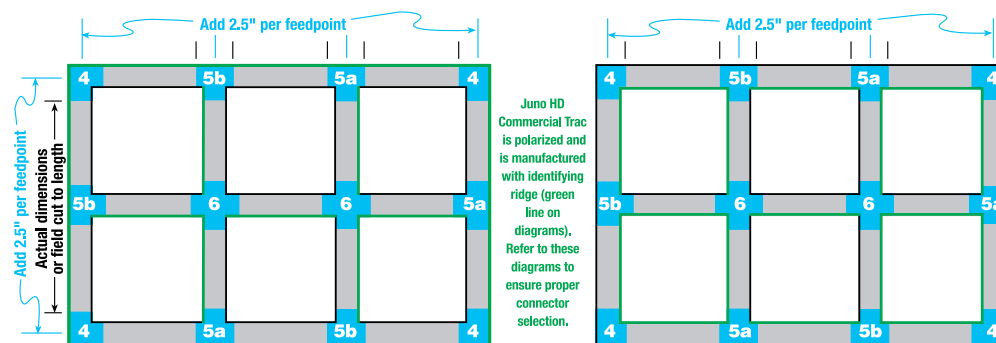

4. **TEK34** 90° "L" Connector
 (adjustable universal polarity)
- 5a. **TEK39** "T" Connector
 (adjustable right polarity)
- 5b. **TEK40** "T" Connector
 (adjustable left polarity)
6. **TEK38** "X" Connector

HD Commercial Track | Track System Components

277V, 2-Circuit/2-Neutral Track System

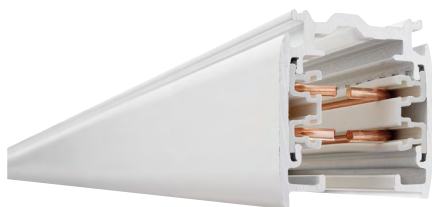

Description

Juno HD Commercial 2-Circuit/2-Neutral Track is ideal for dimming intensive applications. The independent neutrals guarantee that the two circuits are completely isolated. The potential for cross-circuit interference and neutral harmonics is completely eliminated to ensure trouble-free dimming. The HD Commercial 2-Circuit/2-Neutral Track's extruded aluminum construction and continuously crimped conductors ensure mechanical strength and electrical reliability. Its integral suspension rail and pre-drilled mounting holes simplify installation. A wide variety of Juno Trac fixtures may be specified for use with the HD Commercial Track system.

Labels UL Listed • cUL Listed • Current Limiting Feeds approved by the California Energy Commission to meet requirements of Title 24 • Current Limiting Feeds comply with ASHRAE 90.1 and IECC Section 805.5.1.4 for track current limiting.

Features

Construction Rugged, heavy gauge extruded aluminum channel • Integral polarity ridge ensures proper connector and fixture installation

Electrical Each circuit is rated for 20 Amp, 277 Volt operation
• Track extrusion serves as 100% capacity ground

Fixture Adapter Supplied with track fixture • Integrally polarized construction to prevent reverse installation – only allows insertion in proper orientation • Rotary circuit selector enables simple switching between circuits • Integral on/off switch enables individual fixtures to be switched for servicing

Installation May be installed in linear or grid configurations
• Track sections can be cut in the field


Mounting May be mounted directly to hard ceiling using suitable anchors (supplied by others) at pre-drilled mounting holes or using SKB10 Mounting Clip and integral suspension rail • May be mounted to T-bar ceiling using appropriate SKBT12 or SKBX12 Mounting Clips and integral suspension rail • Can also be suspended from ceilings using SPUS Pendant Stem Kits, SKB34 Cable Suspension Kits or 1/4"-20 threaded rod (by others) • Mounting points should be spaced no further than 4' apart and within 6" of any track feed point, junction or end point.

Track Sections



Catalog #	Finish	Description
HTEK4 4FT WH	White	4' Track section.
HTEK4 4FT BL	Black	2-circuit, 277V, 48" length
HTEK4 8FT WH	White	8' Track section.
HTEK4 8FT BL	Black	2-circuit, 277V, 96" length
HTEK4 12FT WH	White	12' Track section.
HTEK4 12FT BL	Black	2-circuit, 277V, 144" length

Dimensions



Connectors



End Feed - Left Polarity

Catalog #	Finish	Description
HTEK11 WH	White	Enables feeding of HTEK Track from top.
HTEK11 BL	Black	Use as Conduit End Feed also.



End Feed - Right Polarity

Catalog #	Finish	Description
HTEK12 WH	White	Enables feeding of HTEK Track from top.
HTEK12 BL	Black	Use as Conduit End Feed also.



Center Feed

Catalog #	Finish	Description
HTEK14 WH	White	Joins two HTEK Track sections in-line both electrically and mechanically.
HTEK14 BL	Black	Enables feeding of HTEK Track from top at intersection.




Miniature Straight Connector


Catalog #	Finish	Description
HTEK21 WH	White	Joins two HTEK Track sections in-line both electrically and mechanically.
HTEK21 BL	Black	


HD Commercial Track | Track System Components


Connectors


Connectors


	Catalog #	Finish	Description
	HTEK11CL WH HTEK11CL BL	White Black	Enables feeding of HTEK Track from top. Requires one or two HTEKCL Current Limiters to provide track current limiting per national, state and local energy codes.


	Catalog #	Finish	Description
	HTEK12CL WH HTEK12CL BL	White Black	Enables feeding of HTEK Track from top. Requires one or two HTEKCL Current Limiters to provide track current limiting per national, state and local energy codes.


	For use with HTEK11CL or HTEK12CL Current Limiting End Feeds			
	Catalog #	Finish	Description	Wattage
	HTCLCB 0.5A WHT	White	0.5A Current Limiting Circuit Breaker	138W
	HTCLCB 1A WHT	White	1A Current Limiting Circuit Breaker	277W
	HTCLCB 2.5A WHT HTCLCB 2.5A BLCK	White Black	2.5A Current Limiting Circuit Breaker	692W
	HTCLCB 5A WHT HTCLCB 5A BLCK	White Black	5A Current Limiting Circuit Breaker	1385W
	HTCLCB 10A WHT HTCLCB 10A BLCK	White Black	10A Current Limiting Circuit Breaker	2770W
	HTCLCB 15A BLCK	Black	15A Current Limiting Circuit Breaker	4155W

	Catalog #	Finish	Description
	HTEK24 WH HTEK24 BL	White Black	Capable of joining two HTEK Track sections at 90° to 180°. Ideal for applications where using an “L” connector is not practical; also useful for installing track around curved architectural details.

	Catalog #	Finish	Description
	HTEK34 WH HTEK34 BL	White Black	Joins HTEK Track sections to make a 90° angle with continued electrical feed. May be used to feed HTEK Track from top.

	Catalog #	Finish	Description
	HTEK38 WH HTEK38 BL	White Black	Joins four HTEK Track sections to make an “X” intersection with continued electrical feed. May be used to feed HTEK Track from top.

	Catalog #	Finish	Description
	HTEK39 WH HTEK39 BL	White Black	Joins three HTEK Track sections to make a “T” intersection with continued electrical feed. May be used to feed HTEK Track from top.

	Catalog #	Finish	Description
	HTEK40 WH HTEK40 BL	White Black	Joins three HTEK Track sections to make a “T” intersection with continued electrical feed. May be used to feed HTEK Track from top.






HD Commercial Track | Track System Components


Connectors and Accessories

Connectors (cont)

 <p>Dead End</p>	Catalog #	Finish	Description
	TEK41 WH TEK41 BL	White Black	Not supplied with HTEK Track sections – must be ordered separately.
 <p>Outlet Box Cover</p>	Catalog #	Finish	Description
	GES15 WH GES15 BL	White Black	Thermoplastic outlet box cover for use when feeding HTEK Track directly over outlet box using HTEK11, HTEK12, HTEK14, HTEK34, HTEK38, HTEK39 or HTEK40.

Accessories



 <p>Mounting Bracket</p>	Catalog #	Finish	Description
	SKB10 WH SKB10 BL	White Black	For mounting track direct to ceiling.
 <p>Mounting Bracket</p>	Catalog #	Finish	Description
	SKBT12 WH SKBT12 BL	White Black	For mounting track to 15/16" flush tile T-bar ceiling.
 <p>Mounting Bracket</p>	Catalog #	Finish	Description
	SKBX12 WH SKBX12 BL	White Black	For mounting track to 15/16" drop tile recessed T-bar ceiling.
 <p>Ceiling Cup Kit</p>	Catalog #	Finish	Description
	SKB30 WH SKB30 BL	White Black	Use to suspend HTEK Track from the ceiling when using steel cable or threaded rod. Included bracket provides suspension attachment point and ceiling cup covers the bracket for an aesthetically pleasing result. Combine with SP4P and SKB34 or 1/4"-20 threaded rod (supplied by others) for a complete suspension solution.
 <p>Suspension Cable Kit</p>	Catalog #	Length	Description
	SKB34 5FT SKB34 9FT	5ft. cable 9ft. cable	Use to suspend HTEK Track from the ceiling with supplied 5' or 9' steel cable. Includes cable and cable adjustment fitter. Combine with SP4P and SKB30 for a complete suspension solution.

 <p>Mounting Stem Kit</p>	Use to suspend HTEK Track from the ceiling. Combine with SP4P for suspension-only points. Mounts to ceiling j-box. Available in 12", 18", 24" and 48" lengths.		
	Catalog #	Finish	Description
	SPUS 12IN WH SPUS 12IN BL	White Black	12" stem length
	SPUS 18IN WH SPUS 18IN BL	White Black	18" stem length
	SPUS 24IN WH SPUS 24IN BL	White Black	24" stem length
	SPUS 48IN WH SPUS 48IN BL	White Black	48" stem length

HD Commercial Track | Track System Components

Accessories and Compatible Fixtures

Accessories (cont)

	Catalog # SP4P WH SP4P BL	Finish White Black	Description Use with SPUS Stem Kit or SKB34 Cable Kit or 1/4"-20 threaded rod (supplied by others) to suspend HTEK Track except at feed or connection points.
Universal Suspension Coupler			
	Catalog # XTSV12		Description All-in-one hand tool bends the track conductors and measures the correct length to ensure proper electrical contact when track sections are cut in the field.
Track Conductor Bending Tool			

HTEK HD Commercial Track Compatible Fixtures

A variety of Juno Trac fixture designs can be adapted to operate with the Juno HTEK HD Commercial Track system. Each fixture has a factory-assembled 2-circuit track adapter that is uniquely keyed to the 277V HD Commercial Track system. To order, simply follow the Series with the "HTEK" Mounting Adapter Type option and the "OFF" Dimming Compatibility option instead of "PDIM" in the standard fixture catalog number to indicate fixtures for use with the HTEK HD Commercial Track system.

Compatible fixture families include (consult factory for additional choices):

R610L, R612L Integral Driver LED Cylinders

T255L LED Cylindra

T256L, T257L, T258L, T259L, T260L LED Flood/Wall Washers

T261L, T262L, T263L, T265L, T267L LED Conix II Series

T283L, T285L, T286L LED Cylinders with Integral Driver

T381L, T382L, T383L, T385L, T387L, T388L LED Vertical Cylinder Series


T1050L, T1051L, T1052L, T1053L, T1054L, T1056L, T1058L LED Flood/Wall Washers

Ordering Example: "T261L G3 30K 80CRI PDIM SP BL" becomes "T261L HTEK G3 30K 80CRI OFF SP BL".


HD Commercial Track | Track System Components

Track Configurations

Possible Track Configuration & Recommended Components

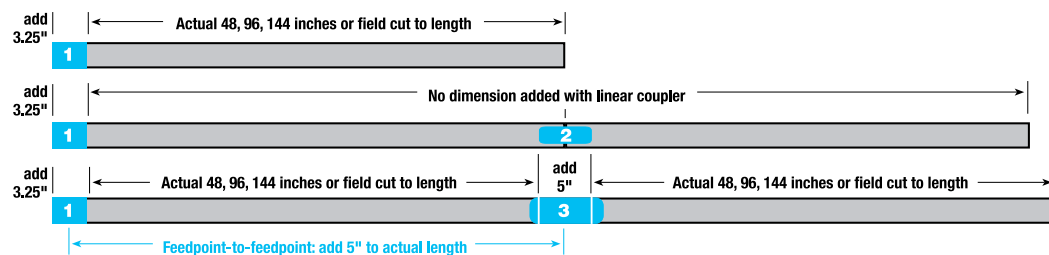

1. **HTEK11** End Feed (left) - standard
HTEK12 End Feed (right)
(used for conduit feed also)
2. **HTEK21** Miniature Straight Connector
3. **HTEK14** Center Feed

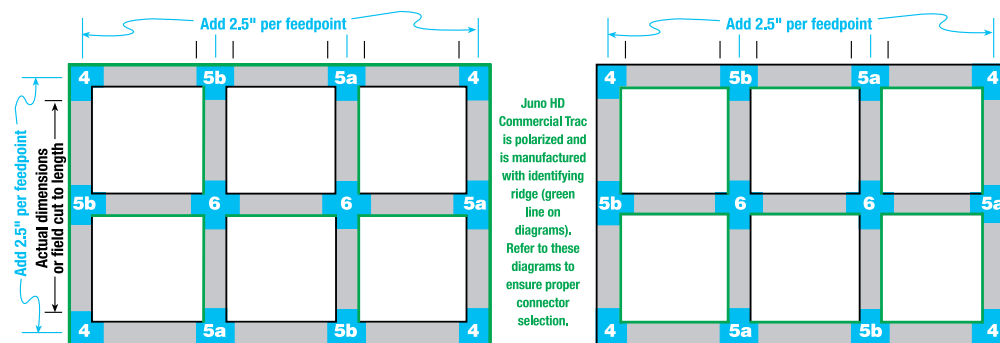


4. **HTEK34** 90° "L" Connector
(adjustable universal polarity)
- 5a. **HTEK39** "T" Connector
(adjustable right polarity)
- 5b. **HTEK40** "T" Connector
(adjustable left polarity)
6. **HTEK38** "X" Connector



Art Hotel, Denver, CO (Astula Inc./Raul J. Garcia Photography)

Trac 12™

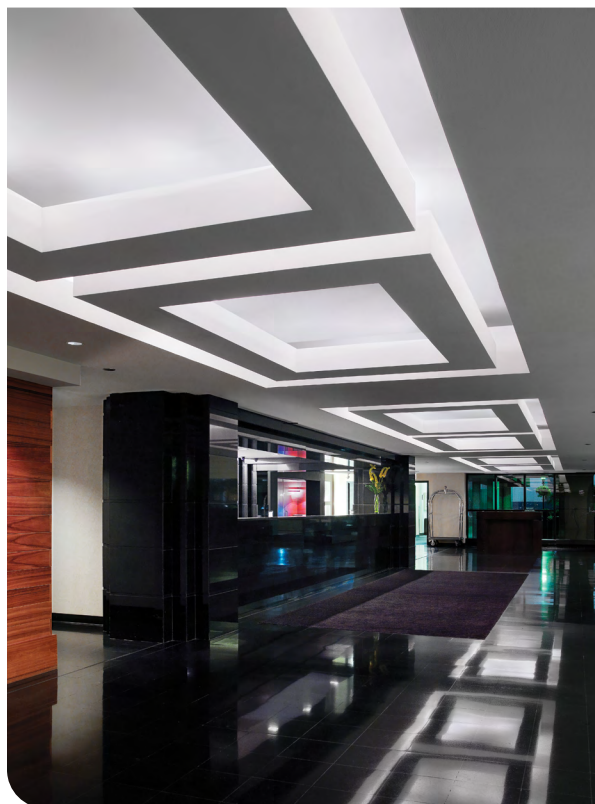

Westin River North, Chicago, IL (Picture Boy Photography)

Linear Lighting Thanks to its ultra-slim profile, Trac 12™ can be easily installed in coves, cabinetry, and casework displays to produce uniform linear lighting. Variable spacing of either LED modules or xenon lamp holders permits on-site fine tuning to create even illumination at the desired light intensity.

Spotlighting Trac 12 is easily integrated into displays, low soffits, and ceilings or can be pendant-suspended for dramatic accent lighting. The diminutive dimensions of Trac 12 allow it to squeeze into tight spaces inaccessible to standard-size, line voltage track systems. Trac 12 is powered by remote low voltage transformers, eliminating the need for transformers at each fixture. This can be helpful in meeting today's stringent energy codes, since power calculations are typically based on the capacity of the transformers, rather than the linear feet of installed track.

Energy-Efficient Illumination The Trac 12 system is offered with a variety of light sources, including the latest in ultra-efficient LEDs. An extensive range of advanced LED fixtures for linear and accent lighting applications feature unparalleled energy savings and remarkably long service life.

Trac 12™ | Linear LED Modules White-Light

Trac 12 Low Power LED Modules

Miniature LED modules approximate the lumen output and light distribution of 5 to 10-watt xenon lamps, using 1/8 the energy and providing a rated life of 50,000-hours. Producing up to 478 lumens per foot, the 90 CRI white-light modules are compatible with standard Trac 12™ and Trac 12/25 track operating at 12VAC. The modules can be placed anywhere on the track, and the track can be cut to length during installation, making the TL214LED Series a uniquely flexible linear lighting solution.



Catalog

TL214LED 27K 90CRI
TL214LED 30K 90CRI
TL214LED 35K 90CRI
TL214LED 40K 90CRI

Watts

1.5
1.5
1.5
1.5

Color Temp.

2700K
3000K
3500K
4000K


Lumens

76
78
79
80

Maximum Lumens/Ft.

456
470
472
478

Dimensions







Westin River North, Chicago, IL (Picture Boy Photography)

Trac 12™ | Linear Lighting Lampholders

Xenon Wedge Base

Wedge Base Lampholders

Wedge base lampholders are an economical choice for linear lighting applications. They have a minimal profile and produce bright, uniform illumination. They are compatible with wedge base lamps that are 10W or less and T3-1/4 size or smaller including xenon, LED, etc. Xenon lamps emit a white light that approximates the color of halogen, but have up to a 20,000-hour lamp life and do not require fixture lenses or special handling.

	Catalog #	Finish	Lamp	Dimensions
	TL201 WH	White	One 12V or 24V, 10W max.	
	TL201 BL	Black	T3-1/4 wedge base lamp	

T3-1/4 Xenon Wedge Base Lamps

Catalog #	Watts	Volts	Clear/ Frosted	Rated Lumens	Catalog #	Watts	Volts	Clear/ Frosted	Rated Lumens
TL901 CLR	5	12	Clear	33	TL910 FRST 24	10	24	Frosted	91
TL903 CLR	10	12	Clear	83					



Trac 12™ | LED Spotlight


Contemporary Cylinder

Contemporary Cylinder

The classic appearance of the TL381L, Trac 12™ LED Cylinder fixture offers a fresh take on the traditional aesthetic. This 13W LED Cylinder spotlight approximates the light output and distribution of 75W MR16 halogen lamps (up to 905 lumens), using less than one-fifth the energy and has a rated life of 50,000-hours. Available in 4 color temperatures and 80 or 90 CRI versions, the white-light LED Cylinder is compatible with standard Trac 12 track, operating with 12-volt AC power. The TL381L can be placed anywhere along the track, and the track can be cut to length during installation.



Dimensions



Ordering Information

Ordering Example: TL381L 27K 80CRI SP WH

Series	Color Temperature	Color Rendering Index	Distribution	Finish
TL381L 13W Integral Driver LED Cylinder	27K 2700K 30K 3000K 35K 3500K 40K 4000K	80CRI 80 CRI 90CRI 90 CRI (2700K & 3000K only)	SP Spot NFL Narrow Flood FL Flood	BL Black WH White

Accessories

For Fixtures	TL381L
Color Filters	CGF 200
Dichroic Filters	DGF 200
Dichroic Color Correction Filters	DCCF 200
Diffusion Lens	DIFF 200
Uniformity Lens	SOLITE 200
UV Filter	UVF 200
Prismatic Spread Lens	PRISM 200
Linear Spread Lens	LSPREAD 200
Hexcell Louver	HCLBL 200
Snoot	SNOOTBL 200

Trac 12™ | LED Spotlight


Cylindra™

Cylindra™

The contemporary styling of the Cylindra LED enables it to subtly enhance practically any decor without diverting attention from the surrounding environment. Soft curved surfaces combine with clean, crisp edges to provide a uniquely attractive aesthetic. The Trac 12 Cylindra 13W LED spotlight approximates the light output and distribution of 75W MR16 halogen lamps (up to 985 lumens), utilizing less than 1/5 of the energy and having a rated life of 50,000 hours. It is available in 2700K, 3000K, 3500K and 4000K color temperatures with a minimum 80 CRI. An optional high CRI version is available in 2700K or 3000K with a minimum 90 CRI. The white-light Cylindra LED is compatible with standard Trac 12 and Trac 12/25 track, operating with 12V AC power. The TL252L can be placed anywhere along the track, and the track can be cut-to-length during installation, making it an economical and flexible accent lighting choice. Cylindra's integral, bayonet-mounted accessory holder accommodates one accessory if desired.



Dimensions



Ordering Information

Ordering Example: TL252L 27K 80CRI NFL BL

Series	Color Temperature	Color Rendering Index	Distribution	Finish
TL252L 13W Cylindra LED	27K 2700K 30K 3000K 35K 3500K 40K 4000K	80CRI 80 CRI 90CRI 90 CRI (2700K & 3000K only)	SP Spot NFL Narrow Flood FL Flood	BL Black WH White

Accessories

For Fixtures	TL252L
Color Filters	CGF 200
Dichroic Filters	DGF 200
Dichroic Color Correction Filters	DCCF 200
Diffusion Lens	DIFF 200
Uniformity Lens	SOLITE 200
UV Filter	UVF 200
Prismatic Spread Lens	PRISM 200
Linear Spread Lens	LSPREAD 200
Hexcell Louver	HCLBL 200
Snoot	SNOOTBL 200

Trac 12™ | LED Mini-Spotlights


Mini-Cylinder Spotlights

Mini-Cylinder Spotlights

The Trac 12 LED Mini-Cylinder Spotlights offer effective accent lighting in a miniature, energy-efficient package. They approximate the light output and distribution of 20W MR11 halogen lamps (up to 344 lumens), utilizing approximately 1/3 of the energy and providing more than 10 times the rated life. Unlike halogen light sources, LEDs produce no IR or UV emissions – this makes them an ideal choice when illuminating heat-sensitive or UV-sensitive objects. Available in 2700K, 3000K, 3500K and 4000K color temperatures, the white-light LED Mini-Cylinder Spotlights are compatible with standard Trac 12 systems operating with 12V AC transformers approved for use with Juno LED products. These fixtures can be placed anywhere along the track, and the track can be cut-to-length during installation, making the LED Mini-Cylinder Spotlights a versatile accent lighting choice.



Dimensions

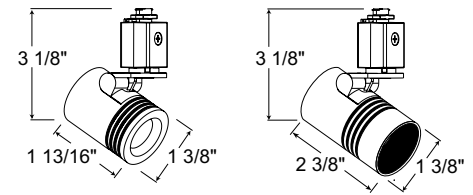

Ordering Information

Ordering Example: TL114 G2 27K 80CRI SP WH

Series	Generation	Color Temperature	Color Rendering Index	Distribution	Finish	Optional Factory Installed Snoot
TL114 6W Quick Jack LED Mini-Cylinder Spotlight	G2 Gen. 2	27K 2700K 30K 3000K 35K 3500K 40K 4000K	80CRI 80 CRI 90CRI 90 CRI	SP Spot NFL Narrow Flood FL Flood	BL Black WH White	TMCSNOOTBL Mini-Cylinder Snoot - Black TMCSNOOTWH Mini-Cylinder Snoot - White

Accessories

Snoot - Black	TMCSNOOTBL
Snoot - White	TMCSNOOTWH

Trac 12™ | MR16 Lampholders

Lily16


Lily16
Constructed with a semi-open design, this series provides for improved airflow around the lamp, leading to better cooling and optimized LED lamp life. They may also be used with MR16 halogen lamps with integral cover glass.



Catalog #
TL1040 WH
TL1040 BL

Finish
White
Black

Lamp
12V or 24V, 50W max.



Trac 12™ | MR16 Lampholders

Cylindra™

Cylindra™

Applying a new twist to a traditional design, Cylindra Series offers a unique, contemporary aesthetic based on a step cylinder fixture platform. Gentle arcs elegantly blend with bold edges to provide a unique yet timeless visual appeal. The Cylindra Trac 12 low voltage is designed to use 50W MR16 halogen lamps. Each Cylindra fixture is supplied with an integral bayonet-mount media cartridge that is designed to simultaneously accept up to two light control accessories.



Catalog

TL141 WH

TL141 BL

Finish


White

Black

Lamp

12V or 24V 50W max. MR16

Dimensions



Accessories





For Fixtures	TL141
Color Filters	CGF 200
Dichroic Filters	DGF 200
Dichroic Color Correction Filters	DCCF 200
Diffusion Lens	DIFF 200
Uniformity Lens	SOLITE 200
UV Filter	UVF 200
Prismatic Spread Lens	PRISM 200
Linear Spread Lens	LSPREAD 200
Hexcell Louver	HCLBL 200
Snoot	SNOOTBL 200

Trac 12™ | MR16 Lampholders

Gimbal Rings

Gimbal Rings

Choose the basic single yoke or the more elegant sculpted dual yoke design.

	Catalog # TL196 WH TL196 BL	Finish White Black	Lamp 12V or 24V 50W max. MR16	Dimensions 
	Catalog # TL296 WH TL296 BL	Finish White Black	Lamp 12V or 24V 50W max. MR16	Dimensions 

Accessories

For Fixtures	TL196, TL296
Hexcell Louver	HCLBL 175
Diffusion Lens	DIFF 175
Uniformity Lens	SOLITE 175

Trac 12™ | System Components

Trac 12/25 Low Voltage Track System

Trac 12/25 Low Voltage Track System


The Trac 12/25 system combines the 25-amp capacity of 10-gauge conductors with a miniature rigid profile that can be surface mounted or pendant suspended. The system operates using remotely located 12-volt or 24-volt transformers. A maximum of 300 watts (12 volts) or 600 watts (24 volts) can be placed per circuit of track.

Key Features

- 10-gauge solid copper conductors with 25-amp capacity
- Rigid aluminum miniature 5/8" H x 15/16" W profile
- Accepts all standard Trac 12™ luminaires
- Can be surface or pendant mounted
- Can be cut to length by installer



Catalog #	Finish	Description
TLVR 2FT WH	White	2' track (actual length 20 5/8")
TLVR 2FT BL	Black	
TLVR 4FT WH	White	4' track (actual length 44 5/8")
TLVR 4FT BL	Black	
TLVR 6FT WH	White	6' track (actual length 68 5/8")
TLVR 6FT BL	Black	
TLVR 8FT WH	White	8' track (actual length 92 5/8")
TLVR 8FT BL	Black	




Trac 12/25 track Sections include dead-end and mounting hardware


Electrical Feeds and Dead End




Catalog #	Finish	Description
TLR21 WH	White	• Allows track to be fed via remote transformer from an outlet box
TLR21 BL	Black	• Includes terminal block, cover and mounting plate




Catalog #	Finish	Description
TLR38 WH	White	• Allows track to be fed via remote transformer from above using standard 1/2" electrical connector
TLR38 BL	Black	• Includes terminal block feed connector and cover




Catalog #	Finish	Description
TLR34 WH	White	• Allows track to be fed via remote transformer with conduit through the end or top using standard 1/2" electrical connector
TLR34 BL	Black	• Includes terminal block feed connector, mounting plate and cover




Catalog #	Finish	Description
TLR50 WH	White	• Use with TLR90, TLR91 or TLR96 to feed from end of track
TLR50 BL	Black	• Includes terminal block feed connector, mounting plate and cover




Catalog #	Finish	Description
TLR36 WH	White	• Mounts over outlet boxes or on T-Bar ceiling to feed up to four tracks
TLR36 BL	Black	• Includes one terminal block connector, mounting plate and cover
		• To feed more than one track, order additional TLR36TB connectors
		• Requires T-Bar clip (TLR37) for T-bar installation



Catalog #	Finish	Description
TLR36TB WH	White	• For use with TLR36
TLR36TB BL	Black	








Catalog #	Finish	Description
TLR28 WH	White	• Dead end to use on extra field-cut track sections
TLR28 BL	Black	






Trac 12™ | System Components

Trac 12/25 Low Voltage Track System

Track Joiners and T-Bar Attachment Clip

 Miniature Straight Connector	Catalog # TLR23 WH TLR23 BL	Finish White Black	Description <ul style="list-style-type: none"> Joins two track sections end-to-end Includes terminal block connector and cover 	Dimensions 
	Catalog # TLR24 WH TLR24 BL	Finish White Black	Description <ul style="list-style-type: none"> Joins two track sections to form a 90-degree corner or straight coupling Includes two terminal block connectors, joiner wires and both 90-degree and straight covers 	Dimensions 
 Accordion Adjustable Joiner	Catalog # TLR20 WH TLR20 BL	Finish White Black	Description <ul style="list-style-type: none"> Joins two track sections at variable angles to left, right, up or down Includes two terminal block connectors, joiner wires and covers 	Dimensions 
	Catalog # TLR37 TLR37916		Description <ul style="list-style-type: none"> TLR37 T-Bar Clip attaches to 15/16" inverted T-bar ceiling TLR37916 T-Bar Clip attaches to 9/16" inverted T-bar ceiling Both clips are compatible with flush tile or drop tile ceilings Two required for 2' or 4' sections, three required for 6' or 8' sections 	









Pendant Mounting Accessories

 T-Bar Ceiling Pendant Stem Feed & Mechanical Support	Catalog # TLR90 12IN WH TLR90 12IN BL TLR90 18IN WH TLR90 18IN BL TLR90 24IN WH TLR90 24IN BL TLR90 36IN WH TLR90 36IN BL TLR90 48IN WH TLR90 48IN BL	Finish White Black White Black White Black White Black White Black	Description <ul style="list-style-type: none"> For pendant mounting Trac 12/25 to 15/16" T-bar ceilings 12", 18", 24", 36", 48" stem lengths Use two for 2', 4' or 6' of track or three for 8' of track For electrical feed, order TLR50 Pendant End Feed Connector 	Dimensions 
	Catalog # TLR91 12IN WH TLR91 12IN BL TLR91 18IN WH TLR91 18IN BL TLR91 24IN WH TLR91 24IN BL TLR91 36IN WH TLR91 36IN BL TLR91 48IN WH TLR91 48IN BL	Finish White Black White Black White Black White Black White Black	Description <ul style="list-style-type: none"> For pendant mounting Trac 12/25 to rigid ceilings 12", 18", 24", 36", 48" stem lengths Use two for 2', 4' or 6' of track or three for 8' of track For electrical feed, order TLR50 Pendant End Feed Connector 	Dimensions 

Trac 12™ | System Components

Trac 12/25 Low Voltage Track System

Pendant Mounting Accessories (cont)

	<table><tr><th>Catalog #</th><th>Finish</th></tr><tr><td>TLR92 12IN WH</td><td>White</td></tr><tr><td>TLR92 12IN BL</td><td>Black</td></tr><tr><td>TLR92 18IN WH</td><td>White</td></tr><tr><td>TLR92 18IN BL</td><td>Black</td></tr><tr><td>TLR92 24IN WH</td><td>White</td></tr><tr><td>TLR92 24IN BL</td><td>Black</td></tr><tr><td>TLR92 36IN WH</td><td>White</td></tr><tr><td>TLR92 36IN BL</td><td>Black</td></tr><tr><td>TLR92 48IN WH</td><td>White</td></tr><tr><td>TLR92 48IN BL</td><td>Black</td></tr></table>	Catalog #	Finish	TLR92 12IN WH	White	TLR92 12IN BL	Black	TLR92 18IN WH	White	TLR92 18IN BL	Black	TLR92 24IN WH	White	TLR92 24IN BL	Black	TLR92 36IN WH	White	TLR92 36IN BL	Black	TLR92 48IN WH	White	TLR92 48IN BL	Black	<table><tr><th>Description</th></tr><tr><td><ul style="list-style-type: none">• For pendant mounting Trac 12/25 to T-bar or rigid ceilings• 12", 18", 24", 36", 48" stem lengths• Use two for 2', 4', or 6' of track or three for 8' of track• Provides mechanical support only• Order TLR37 or TLR37916 T-Bar Clip to mount on T-bar ceilings</td></tr></table>	Description	<ul style="list-style-type: none">• For pendant mounting Trac 12/25 to T-bar or rigid ceilings• 12", 18", 24", 36", 48" stem lengths• Use two for 2', 4', or 6' of track or three for 8' of track• Provides mechanical support only• Order TLR37 or TLR37916 T-Bar Clip to mount on T-bar ceilings	
Catalog #	Finish																										
TLR92 12IN WH	White																										
TLR92 12IN BL	Black																										
TLR92 18IN WH	White																										
TLR92 18IN BL	Black																										
TLR92 24IN WH	White																										
TLR92 24IN BL	Black																										
TLR92 36IN WH	White																										
TLR92 36IN BL	Black																										
TLR92 48IN WH	White																										
TLR92 48IN BL	Black																										
Description																											
<ul style="list-style-type: none">• For pendant mounting Trac 12/25 to T-bar or rigid ceilings• 12", 18", 24", 36", 48" stem lengths• Use two for 2', 4', or 6' of track or three for 8' of track• Provides mechanical support only• Order TLR37 or TLR37916 T-Bar Clip to mount on T-bar ceilings																											
	<table><tr><th>Catalog #</th><th>Finish</th></tr><tr><td>T96 WH</td><td>White</td></tr><tr><td>T96 BL</td><td>Black</td></tr></table>	Catalog #	Finish	T96 WH	White	T96 BL	Black	<table><tr><th>Description</th></tr><tr><td><ul style="list-style-type: none">• Joins pendant stems for use in higher ceiling applications</td></tr></table>	Description	<ul style="list-style-type: none">• Joins pendant stems for use in higher ceiling applications																	
Catalog #	Finish																										
T96 WH	White																										
T96 BL	Black																										
Description																											
<ul style="list-style-type: none">• Joins pendant stems for use in higher ceiling applications																											
	<table><tr><th>Catalog #</th><th>Finish</th></tr><tr><td>T94 WH</td><td>White</td></tr><tr><td>T94 BL</td><td>Black</td></tr></table>	Catalog #	Finish	T94 WH	White	T94 BL	Black	<table><tr><th>Description</th></tr><tr><td><ul style="list-style-type: none">• Permits TLR90 and TLR91 Pendant Stems to hang straight from sloped ceilings• Accommodates two 12-gauge solid THHN copper wires at up to a 60° angle• 20-amp capacity (based on 12-gauge wire)</td></tr></table>	Description	<ul style="list-style-type: none">• Permits TLR90 and TLR91 Pendant Stems to hang straight from sloped ceilings• Accommodates two 12-gauge solid THHN copper wires at up to a 60° angle• 20-amp capacity (based on 12-gauge wire)																	
Catalog #	Finish																										
T94 WH	White																										
T94 BL	Black																										
Description																											
<ul style="list-style-type: none">• Permits TLR90 and TLR91 Pendant Stems to hang straight from sloped ceilings• Accommodates two 12-gauge solid THHN copper wires at up to a 60° angle• 20-amp capacity (based on 12-gauge wire)																											
	<table><tr><th>Catalog #</th><th>Finish</th></tr><tr><td>TLR95 48IN WH</td><td>White</td></tr><tr><td>TLR95 48IN BL</td><td>Black</td></tr><tr><td>TLR95 144IN WH</td><td>White</td></tr><tr><td>TLR95 144IN BL</td><td>Black</td></tr></table>	Catalog #	Finish	TLR95 48IN WH	White	TLR95 48IN BL	Black	TLR95 144IN WH	White	TLR95 144IN BL	Black	<table><tr><th>Description</th></tr><tr><td><ul style="list-style-type: none">• Includes mini-canopy, steel cable, 15/16" T-bar clip, toggle bolt and track attachment hardware• 48" or 144" cable lengths• Length is easily field adjustable• Recommended for track patterns only (not recommended for straight runs)• Supports should be placed every 3' plus at feed points, at feed points, bend peaks and corners</td></tr></table>	Description	<ul style="list-style-type: none">• Includes mini-canopy, steel cable, 15/16" T-bar clip, toggle bolt and track attachment hardware• 48" or 144" cable lengths• Length is easily field adjustable• Recommended for track patterns only (not recommended for straight runs)• Supports should be placed every 3' plus at feed points, at feed points, bend peaks and corners													
Catalog #	Finish																										
TLR95 48IN WH	White																										
TLR95 48IN BL	Black																										
TLR95 144IN WH	White																										
TLR95 144IN BL	Black																										
Description																											
<ul style="list-style-type: none">• Includes mini-canopy, steel cable, 15/16" T-bar clip, toggle bolt and track attachment hardware• 48" or 144" cable lengths• Length is easily field adjustable• Recommended for track patterns only (not recommended for straight runs)• Supports should be placed every 3' plus at feed points, at feed points, bend peaks and corners																											

Trac 12™ | System Components

Trac 12™ Low Voltage Track System

Trac 12™ Low Voltage Track System


The Trac 12 series is the original miniature low voltage system that combines a 20-amp capacity with an extremely miniature engineered plastic profile. The system operates using remotely located or in-line 12-volt or 24-volt transformers. A maximum of 240 watts (12 volts) or 480 watts (24 volts) can be placed per circuit of track.

Key Features:

- 12-gauge solid copper conductors with 20-amp capacity
- Engineered thermoplastic ultra-miniature 3/8" H x 3/4" W profile
- Accepts all standard Trac 12 luminaires
- Can be cut to length by installer


Trac 12™ Track Sections Includes end feed connector, dead end and mounting hardware. End feed connector converts to a straight connector when joining multiple track sections.

NOTE: When joining track sections, overall length is 1 7/16" shorter than individual track section lengths.



Catalog #	Finish	Description
TLV 2FT WH	White	2' track (actual length 20 5/8")
TLV 2FT BL	Black	
TLV 4FT WH	White	4' track (actual length 44 5/8")
TLV 4FT BL	Black	
TLV 8FT WH	White	8' track (actual length 92 5/8")
TLV 8FT BL	Black	

Dimensions




Electrical Feeds



End Feed Connector/
Straight Joiner with
Dead End

Catalog #	Finish	Description
TL38 WH	White	• For use with field cut-off track sections.
TL38 BL	Black	• Includes terminal block connector with cover and dead end
		• Terminal block connector also serves as a straight joiner to join two track sections


Dimensions



End Feed Connector and
Conduit Feed

Catalog #	Finish	Description
TL34 WH	White	• Allows track to be fed via remote transformer with conduit through the end or top using standard 1/2" electrical connector
TL34 BL	Black	• Includes mounting plate, surface conduit adapter and cover


Dimensions



Outlet Box/T-Bar
Ceiling Canopy

Catalog #	Finish	Description
TL21 WH	White	• May be mounted over outlet boxes or on T-bar ceiling runners to feed up to four track sections via a remote transformer.
TL21 BL	Black	• Includes mounting plate and cover with four breakouts.
		• Requires TLR37 or TLR37916 for T-bar ceiling installation





Dimensions




Trac 12™ | System Components

Trac 12™ Low Voltage Track System

Joiner Connectors

	Catalog #	Finish	Description	Dimensions
 Right Angle Joiner	TL24 WH TL24 BL	White Black	<ul style="list-style-type: none"> Joins two track sections to form a 90-degree corner. Includes one terminal block connector with cover and joiner wires 	 2 7/8" 15/16"
 Adjustable Joiner	TL20 WH TL20 BL	White Black	<ul style="list-style-type: none"> Joins two track sections at variable angles to left, right, up or down. Includes one terminal block connector with cover and 4" flexible joiner cable 	 15/16" 2 1/4"

Mounting Accessories

	Catalog #	Description
 T-Bar Attachment Clip	TLR37 TLR37916	<ul style="list-style-type: none"> TLR37 T-Bar Clip attaches to 15/16" inverted T-bar ceiling TLR37916 T-Bar Clip attaches to 9/16" inverted T-bar ceiling Both clips are compatible with flush tile or drop tile ceilings Two required for 2' or 4' sections, three required for 6' or 8' sections

Trac 12™ | System Components

Trac 12™ Electronic Transformers

Direct Wire Electronic Transformers

LED



60-Watt Surface Mount Transformer

Catalog #	Finish	Description	Dimensions
TL544 LED 60W 120 12AC 6CP WH	White	<ul style="list-style-type: none"> 12V-60VA LED-Compatible Surface Mount Transformer Low profile 12 volt electronic transformer Rated for 0-60 watts for LED or incandescent loads 6' three-wire cord set and 4 1/2" leads with mating connector for TL43 monopoint Rocker on/off switch 	
TL544 LED 60W 120 12AC 6CP BL	Black		

LED



Canopy Transformer

Catalog #	Finish	Description	Dimensions
TL566 LED 100W 120 12AC WH	White	<ul style="list-style-type: none"> 12V-100VA LED-Compatible Canopy Mount Transformer Canopy with 12 volt electronic transformer mounts over 120 volt outlet box to end-feed one track section or center feed two track section Rated for 0-100 watts for LED or incandescent loads Supplied with mounting plate Not designed for use with Trac 12/25 track 	
TL566 LED 100W 120 12AC BL	Black		

Incandescent



Surface Transformer

Catalog #	Finish	Description	Dimensions
TL547 150W 120 12AC WH	White	<ul style="list-style-type: none"> Low profile electronic 12-volt transformer for loads between 50-150 watts. Incandescent only May be installed in-line with track (Trac 12 only) or remotely mounted up to 5' away (Trac 12 or Trac 12/25) 120-volt supply can be fed into end or top using standard 1/2" electrical connectors Includes on/off push button switch 	
TL547 150W 120 12AC BL	Black		

LED

Catalog #	Finish	Description
TL567 LED 100W 120 12AC WH	White	<ul style="list-style-type: none"> 12V-100VA LED-Compatible Surface Mount Transformer 12 volt electronic transformer Rated for 0-100 watts for LED or incandescent loads For in-line (Trac 12 track only) or remote installation up to 5' away (Trac 12 or Trac 12/25) End or top feed supply wiring using 1/2" electrical connectors Includes on/off push button switch
TL567 LED 100W 120 12AC BL	Black	

Trac 12™ | System Components

Trac 12™ & Trac 12/25 Electronic Transformers


12V Electronic Transformers (LED-Compatible)

Trac 12 LED-compatible electronic driver/transformers are compact and lightweight — and thus ideal for mounting in close proximity to the track. They are designed for 120-volt input and may be dimmed using a variety of dimmers qualified by Juno for use with a non-resistive LED load. See specification sheet for a list of qualified dimmers. These driver/transformers are recommended for track run lengths not exceeding 21 feet. TL601E is supplied with 18" jacketed secondary wire; TL602E has an open slot in the housing for Class 2 secondary wires to exit. While specifically designed for use with Trac 12 LED luminaires, these electronic transformers are also compatible with incandescent luminaires. Consult factory for other available wattages.




Ordering Information

Ordering Examples: TL601E 75W 120 12AC 6CP WH

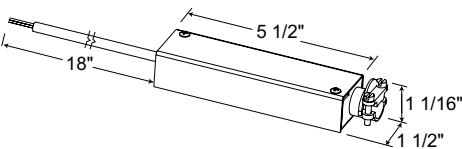Series	Wattage	Input Voltage	Output Voltage	Factory Installed Options	Finish	Dimensions
TL601E Electronic Driver/ Transformer	10W 10 Watts 25W 25 Watts 60W 60 Watts 75W 75 Watts	120 120VAC	12AC 12VAC	6CP 6FT Cord & Plug	BL Black WH White	

Ordering Information

Ordering Examples: TL602E 10W 120 12AC 6CP WH

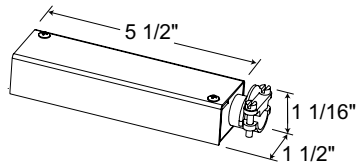Series	Wattage	Input Voltage	Output Voltage	Factory Installed Options	Finish	Dimensions
TL602E Electronic Driver/ Transformer	10W 10 Watts 25W 25 Watts 60W 60 Watts	120 120VAC	12AC 12VAC	6CP 6FT Cord & Plug	WH White	

12V Plug-In Electronic Transformers (LED-Compatible)



60-Watt Plug-In
Transformer

Catalog

TL548 LED 60W 120 12AC WH
TL548 LED 60W 120 12AC BL


Finish

White
Black

Description

- Integral plug-in 12-volt transformer for incandescent-only loads up to 60 watts.
- Supplied with 10' of two-wire cord and On/Off line cord switch.
- May also be used with Trac 12/25 track.

Dimensions





Trac 12™ | System Components

Trac 12™ & Trac 12/25 Magnetic Transformers

Remote Mount Magnetic Transformers



Remote Mount Magnetic Transformers are designed to be installed in remote locations such as basements, attics, plenums and electrical closets. The location must be accessible and well ventilated with ambient temperatures below 140°F. 12-volt transformers are typically used for spotlighting applications due to the ready availability of 12-volt MR11 and MR16 lamps. These transformers are designed for either 120-volt or 277-volt input, and have premium resettable magnetic circuit breakers, dual-tap standard/boost tap primary input leads to adjust for voltage drop and may be dimmed using dimmers qualified by Juno. See specification sheets for dimming recommendations. Primary and secondary circuits are physically and electrically isolated and grounded. Remote Mount Magnetic Transformers are compatible with all Trac 12 low voltage luminaires including halogen and LED (12V transformers only).

12V AC Class 2 Remote Mount Magnetic Transformer

Ordering Information				Ordering Examples: MAGXFMR 1C 60W 120 12AC 6CP BL			
Series	Number of Circuits	Wattage	Input Voltage	Output Voltage	Factory Installed Options	Finish	Dimensions
MAGXFMR Remote Magnetic Transformer	1C 1 Circuit	10W¹ 10 Watts 25W¹ 25 Watts 60W 60 Watts	120 120VAC	12AC 120VAC	6CP 6FT Cord & Plug ¹	BL Black	 

¹ 6CP option not available with 10W and 25W versions.

12V AC Class 1 Remote Mount Magnetic Transformer

Ordering Information				Ordering Examples: MAGXFMR 1C 300W 120 12AC BL			
Series	Number of Circuits	Wattage	Input Voltage	Output Voltage	Factory Installed Options	Finish	Dimensions
MAGXFMR Remote Magnetic Transformer	1C 1 Circuit	20W 20 Watts 40W 40 Watts 75W 75 Watts 150W 150 Watts 240W 240 Watts 300W 300 Watts	120 120VAC 277 277VAC ¹	12AC 12VAC	6CP 6FT Cord & Plug ²	BL Black	 

¹ 277VAC option only available with 20W, 40W, 75W, 150W, 240W, 300W versions

² 6CP option only available with 120VAC versions, and only on 20W, 40W and 75W versions. Availability of MAGFMR with 6CP may be limited.

Transformer Dimensions


Type	Length (L)	Width (W)	Depth (D)
1-Circuit	10-3/4"	4-3/8"	4-1/8"

Trac 12™ | System Components

Trac 12 Extension Wands & Monopoints

Extension Wands

Trac 12 extension wands allow any Trac 12 fixture to be suspended without having to lower the track section itself. For use with either Trac 12/25 track, Trac 12 track or Monopoints.



Catalog #	Finish	Overall Length
TLRW 12IN WH	White	14"
TLRW 12IN BL	Black	
TLRW 18IN WH	White	20"
TLRW 18IN BL	Black	
TLRW 24IN WH	White	26"
TLRW 24IN BL	Black	
TLRW 36IN WH	White	38"
TLRW 36IN BL	Black	
TLRW 48IN WH	White	50"
TLRW 48IN BL	Black	

Trac 12™ | System Components

Monopoints

Trac 12™ Monopoints with Integral Transformer


Trac 12 Monopoints increase the versatility of Trac 12 luminaires, allowing them to be mounted where track sections may not offer the best aesthetic or functional solution. Each monopoint includes an integral transformer to power one fixture.

Surface Monopoints



Cylindrical Surface Monopoint with Integral Transformer

Catalog #	Finish	Description
TL540 LED WH	White	• Mounts over standard ceiling outlet boxes
TL540 LED BL	Black	• Includes 12V 50VA electronic transformer
		• Accepts one Juno Trac 12 LED or halogen luminaire up to 60W max.
		• 120V input




Recessed Monopoints



Recessed Monopoint, New Construction & Remodel

Catalog #	Finish	Description
TL644 60W 120 12AC WH	White	• For new construction or remodel installation
TL644 60W 120 12AC BL	Black	• Installs from below the ceiling or wall surface, in 2 x 6 construction up to 3/4" max. surface thickness
		• Includes 12V 50VA electronic transformer
		• Includes TC rated recessed wiring compartment with universal electrical connector which accepts 3/8" flexible conduit or non-metallic sheathed cable (Type NM)
		• Recessed section is 3" high and 8" long.
		• No visible mounting screws
		• Accepts one Juno Trac 12 LED or halogen luminaire up to 60W max.
		• 120V input






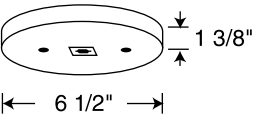
Trac 12™ | System Components

Monopoints

Trac 12™ Remote Powered Monopoints

Trac 12 Monopoints increase the versatility of Trac 12 luminaires, allowing them to be mounted where track sections may not offer the best aesthetic or functional solution. Each monopoint must be connected to a remote transformer to power one fixture.






Remote Powered Monopoints

	Catalog #	Finish	Description	Dimensions
 Mini-Monopoint for Remote Transformer	TL43 WH TL43 BL	White Black	<ul style="list-style-type: none"> Mounts directly into ceiling, wall or cabinet surfaces with no visible mounting screws Includes mounting retaining spring and 50" of wire with mating connector to TL544 transformer (ordered separately) Accepts one Juno Trac 12 LED or halogen luminaire up to 60W max. 	
	Catalog #	Finish	Description	Dimensions
 Monopoint for Remote Transformer	TL40 WH TL40 BL	White Black	<ul style="list-style-type: none"> Mounts over standard ceiling outlet boxes supplied with 12 or 24 volts from a remote transformer Accepts one Juno Trac 12 LED or halogen luminaire up to 60W max. 	

Trac 12™ | Accessories

Light Control Accessories

The Juno complete range of light control accessories permit the designer to custom tailor effects. See individual fixture pages and specification sheets for additional details.


Beam Control Lenses			2" DIAMETER	COMPATIBLE WITH	
	These alter the light distribution, enlarging or elongating it, softening the beam edge or removing striations.	Prismatic Spread Lens	PRISM 200	TL141*, TL252L, TL381L	
		Linear Spread Lens	LSPREAD 200		
		Uniformity Lens (Solite™)	SOLITE 200		
		Diffusion Lens	DIFF 200		
UV Filters					
	These museum quality lenses filter out ultraviolet radiation below 400 nanometers to protect fade sensitive art and objects from light degradation.		UVF 200		
Dichroic Color Correction Filters					
	Color Correction Filters correct the light, to warm it up to approximate incandescent.	Halogen-to-Incandescent, 2700K	DCCF 200 HAL2700		
Color Filters			Dichroic Glass Filters		
	Color Filters change white light into colored light and are available in colored glass and more efficient/saturated dichroic filters.	Red	DGF 200 DRED		
		Medium Green	DGF 200 MGRN		
		Medium Blue	DGF 200 MBLU		
		Yellow	DGF 200 DYEL		
		Magenta	DGF 200 MAGEN		
		Blue-Green (Cyan)	DGF 200 CYAN		
		Colored Glass Filters			
		Medium Pink	CGF 200 MPINK		
		Warm Red	CGF 200 WRED		
		Daylight Blue	CGF 200 DLTBLUE		
		Medium Blue	CGF 200 MBLU		
		Medium Amber	CGF 200 MAMB		
		Medium Green	CGF 200 MGRN		
		Louvers			
		Louvers provide greater visual source cut-off and reduce perceived fixture brightness.	Hexcell Louvers	HCLBL 200	
Snoots					
	Snoots extend lamp shielding and can reduce spill light at the edge of a beam pattern.	Snoots	SNOOTBL 200		

* Simultaneously accepts any combination of up to two filters, lenses or louvers.

Trac 12™ | Applications

Linear Lighting Application Data for LED

Cabinetry Lighting Guidelines (LED)

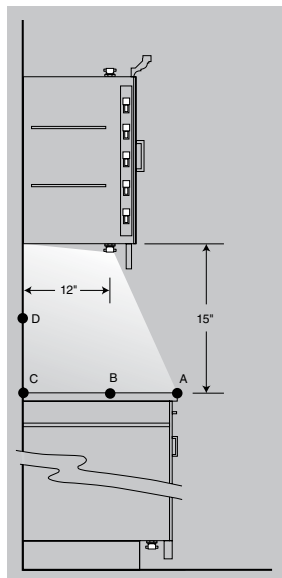

Over Cabinets Trac 12, using modules spaced 6" on-center, generally provides excellent indirect lighting. For lower-level mood lighting, closer module spacing and dimming is recommended. Placing the fixture at the front edge of the cabinet top will project light into the space and illuminate any displayed objects. Locate top of lamp even with top edge of cove molding to prevent a harsh shadow line.

Inside Cabinets Running Trac 12 vertically on the front inside of cabinets avoids the need to put track on each shelf. Placing modules 4"- 6" on-center generally provide adequate lighting inside a cabinet.

Under Cabinets Placing Juno Trac 12 at the front lip of the cabinet conceals the fixture from view, minimizes veiling reflections, and provides maximum light on the working area of the countertop.


Footcandles on Horizontal Work Surface*

Catalog Number	Color Temperature	On-Center Spacing	Footcandles*			
			A	B	C	D
TL214LED 27K 90CRI	2700K	3"	49	127	73	63
TL214LED 30K 90CRI	3000K	3"	50	134	78	63
TL214LED 35K 90CRI	3500K	3"	53	139	82	66
TL214LED 40K 90CRI	4000K	3"	55	147	86	69
TL214LED 27K 90CRI	2700K	4"	37	95	55	47
TL214LED 30K 90CRI	3000K	4"	38	100	58	47
TL214LED 35K 90CRI	3500K	4"	40	105	62	50
TL214LED 40K 90CRI	4000K	4"	42	111	65	52

* Data shown is for operation at 12 volts. For operation at 11.5 volts, multiply by 0.94.

Kick Spaces TL214LED modules are spaced on 4" on-center generally provides adequate kick space accent lighting. Wider spacings can be used when the distance from the track to the floor is greater than 4" or when perfectly uniform illumination is not required.

Cove Lighting (LED)

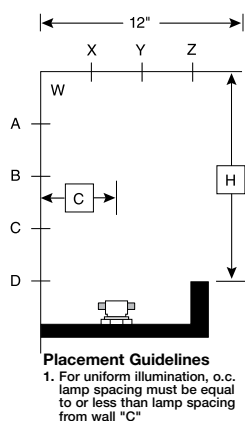

Footcandles on Vertical and Horizontal Planes*

Catalog Number	Lamp Spacing From Wall C	O.C. Lamp Spacing	Cove Height H	Footcandles on Vert. Plane (Wall)				Footcandles on Horiz. Plane (Ceiling)			
				A	B	C	D	W	X	Y	Z
TL214LED 30K 90CRI,	4"	4"	6"	200	204	181	143	248	337	288	171
TL214LED 35K 90CRI ¹	4"	4"	9"	128	150	156	107	196	225	204	148
	4"	4"	12"	87	110	145	92	153	168	156	125
	5"	5"	6"	148	143	124	105	167	245	255	160
	5"	5"	9"	103	113	107	75	141	171	169	129
	5"	5"	12"	72	88	99	63	114	129	125	105

¹ Data shown is for 3000K/3500K. For 2700K modules, use 0.97 multiplier; for 4000K modules, use 1.02 multiplier.

Lumens per Foot*

Catalog Number	2"	3"	Lamp Spacing 4"	6"	12"
TL214LED 27K 90CRI	456	304	228	152	—
TL214LED 30K 90CRI	470	313	235	157	—
TL214LED 35K 90CRI	472	315	236	157	—
TL214LED 40K 90CRI	478	319	239	159	—

* Data shown is for operation at 12-volts. For operation at 11.5-volts multiply by 0.94.

** Based on 20% maximum light output decrease between first and last fixture on track due to voltage drop; to utilize full capacity of track and transformers, individual transformer circuits may have to feed multiple runs using separate feed points.


Maximum Track Run Length**

Catalog Number		2"	3"	Lamp Spacing 4"	6"	12"
TL214LED 27K 90CRI,	Magnetic	24'	30'	32'	42'	—
TL214LED 30K 90CRI,						
TL214LED 35K 90CRI,						
TL214LED 40K 90CRI						

Trac 12™ | Applications

Linear Lighting Application Data for Xenon

Cabinetry Lighting Guidelines (Xenon)

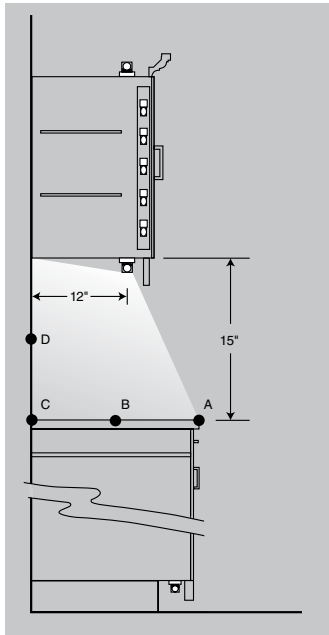

Over Cabinets The Trac 12™ system, using 10-watt lamps spaced 6" on-center, generally provides excellent indirect lighting. For lower-level mood lighting, use 5-watt lamps with slightly closer spacing. Placing the fixture at the front edge of the cabinet top will project light into the space and illuminate any displayed objects. Locate top of lamp even with top edge of cove molding to prevent a harsh shadow line

Inside Cabinets Running the Trac 12 system vertical on the front inside of cabinets avoids the need to put track on each shelf. 5-watt Xenon lamps 4" on-center will generally provide adequate lighting inside a cabinet.

Under Cabinets Placing the Juno Trac 12 system at the front lip of the cabinet conceals the fixture from view, minimizes veiling reflections, and provides maximum light on the working area of the countertop.


Footcandles on Horizontal Work Surface

Lamp Type	Catalog Number	Number of Lamps	Volts/ Watts	On-Center Spacing	A	Footcandles B	Footcandles C	D
Xenon Wedge Base	TL201	1	12V/5W	3"	10	31	20	22
		1	12V/10W	6"	12	36	23	25

Kick Spaces 5-watt Xenon lamps spaced on 5" centers provide adequate kick space lighting. Wider spacings can be used when the distance from track to floor is greater than 4" or when even illumination is not required.

NOTE: Shiny flooring may cause lamp image reflections.

Cove Lighting (Xenon)



Placement Guidelines

- For uniform illumination, o.c. lamp spacing must be equal to or less than lamp spacing from wall "C"

Footcandles on Vertical and Horizontal Planes

Lamp		Lamp Spacing From Wall	O.C. Lamp	Cove Height	Footcandles on Vert. Plane (Wall)				Footcandles on Horiz. Plane (Ceiling)			
Type		C	Spacing	H	A	B	C	D	W	X	Y	Z
12V, 10W Wedge Base Xenon Lamp (Test conducted with 70% reflectances at 11.5 volts)		3"	3"	6"	102	143	149	29	162	151	86	40
		3"	3"	9"	57	82	143	19	109	111	86	50
		3"	3"	12"	39	52	110	14	76	80	72	52
Conversion factors for other lamps		4"	4"	6"	81	102	97	21	114	113	78	35
LAMP	MULTIPLIER	4"	4"	9"	49	68	91	15	81	82	70	42
24V, 10W Wedge Base	1.09	4"	4"	12"	33	45	88	10	58	61	56	42
24V, 5W Wedge Base	0.32	5"	5"	6"	63	65	62	17	81	99	75	32
12V, 5W Wedge Base	0.37	5"	5"	9"	40	52	56	12	61	63	58	40
		5"	5"	12"	29	39	53	7	44	47	44	37

NOTE: Frosted lamps provide slightly less lumen output, but more uniformity with wider spacings.

Maximum Run Length per 20 Amp Circuit**

Lamp Type		Lamp Spacing				
		2"	3"	4"	6"	12"
10 Watt Xenon Lamps	Lumens/Foot (12V Lamp)	—	310	233	186	155
	Maximum Run Length - 24V	—	12'	16'	20'	24'
	Maximum Run Length - 12V	—	6'	8'	10'	12'
5 Watt Xenon Lamps	Lumens/Foot (12V Lamp)	184	123	92	74	61
	Maximum Run Length - 12V	8'	12'	16'	20'	24'

Maximum Run Length per 25 Amp Circuit**

	Lamp Type	2"	3"	Lamp Spacing			4"	5"	6"
10 Watt Xenon Lamps	Lumens/Foot (12V Lamp)	–	310	233	186	155			
	Maximum Run Length - 24V	10'	15'	20'	25'	30'			
	Maximum Run Length - 12V	5'	7.5'	10'	12.5'	15'			
5 Watt Xenon Lamps	Lumens/Foot (12V Lamp)	184	123	92	74	61			
	Maximum Run Length - 12V	10'	15'	20'	25'	30'			

** Based on 20% maximum light output decrease between first and last fixture on track due to voltage drop; to utilize full capacity of track and transformers, individual transformer circuits may have to feed multiple runs using separate feed points.

Lighting Control & Application Tips

Applying and Controlling Light

Contrast Ratios

Light on an object must be a minimum of three times brighter than its surrounding area for the object to be perceived as being illuminated. Five to one is generally preferred and contrasts of twenty to one or greater can be desirable for more dramatic lighting effects.



3:1 Contrast Ratio

5:1 Contrast Ratio

20:1 Contrast Ratio

Light Control Lenses


While in many applications the distribution of bare lamps or reflectors is perfectly acceptable, most Juno Trac fixtures accept control lenses that can be used to create more sophisticated, dramatic effects and greater visual impact.

Note: Preservation and light degradation are of major concern when lighting any type of art. Light levels and heat associated with light sources are critical issues with respect to art media—paper, wood, glues, watercolor pigments, lacquers, textiles and organic materials. If preservation is a concern, you should consult a professional in this field.



Bare Lamp

Many bare lamps produce irregular round beam shapes and have light/dark striations.



Solite™ Uniformity Lens

This fine-prism lens eliminates striations without noticeably altering the size of the beam or light output.




Diffusion Lens

Frosted lens softens the beam and lightly diffuses the pattern.



Prismatic Spread Lens

This coarse prismatic lens eliminates striations and enlarges the size of the beam. It is especially useful with narrow flood distribution lamps.



Linear Spread Lens

The linear prisms on this lens elongate the beam pattern into a wide oval pattern. It can be rotated so the beam is elongated either horizontally, vertically or at any angle in between.

UV Filter

This dichroic filter blocks virtually all transmission below 400 nanometers, the range most responsible for UV degradation. While white LEDs typically do not emit a significant UV component, it adds an extra layer of protection for highly sensitive objects.



Color Filters

These change white light into colored using colored glass. This is the lowest cost method of creating colored light effects.



Dichroic Filters

Dichroic filters are multi-layer thin-film coatings deposited on a glass substrate. Their light transmission levels are substantially higher than simple glass color filters, providing considerable savings in energy and money. Dichroic filters are highly color selective producing brighter, cleaner appearing, saturated color.

Incandescent Color Correction Filter


Dichroic filter corrects 3000K color temperature to approximately 2700K to approximate incandescent.



Lighting Control & Application Tips


Accent Lighting

Effective accent lighting involves the proper selection and placement of lamps, optional use of control media and establishing appropriate contrast ratios between the illuminated object and its background.

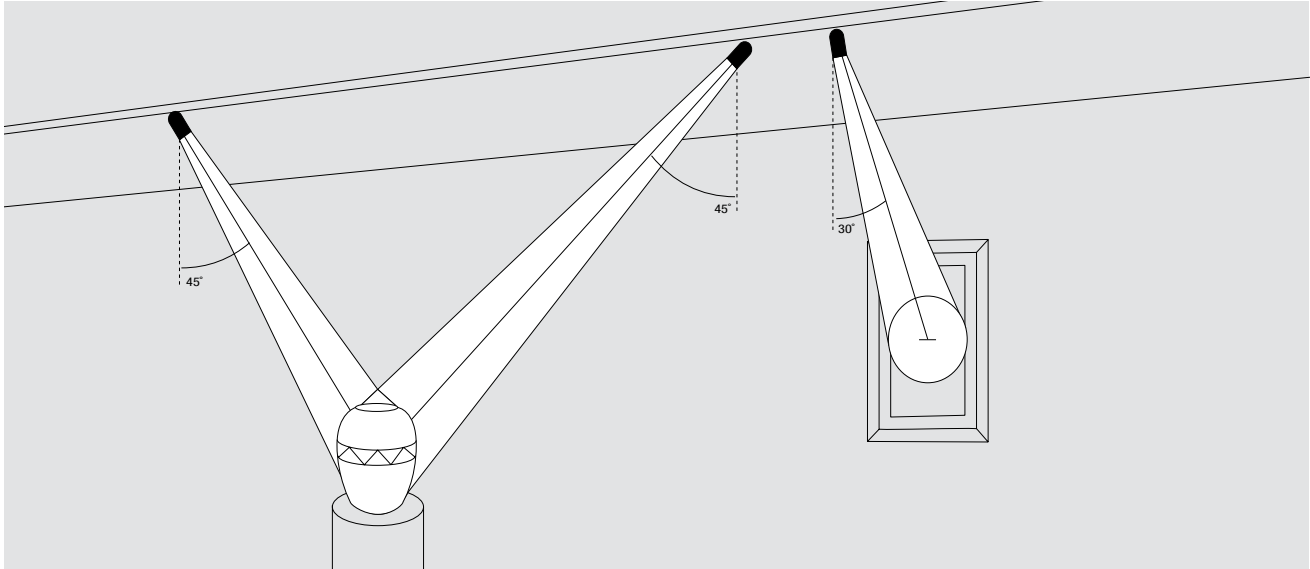

Accent Lighting of Three Dimensional Objects

"Key and fill" is an effective technique for accentuating the three-dimensional character of an object. This technique entails the use of key and fill lighting from two sides of the object. Key lighting is a hard (more direct and intense beam) accent light used to create shadows and to highlight an object's form and texture. Fill light is a softer (wider beam) light thrown from the opposite side of the object to soften the shadows, making the object appear more natural. Other techniques can also be applied to further accentuate the unique character of an object, such as silhouetting an object from behind.

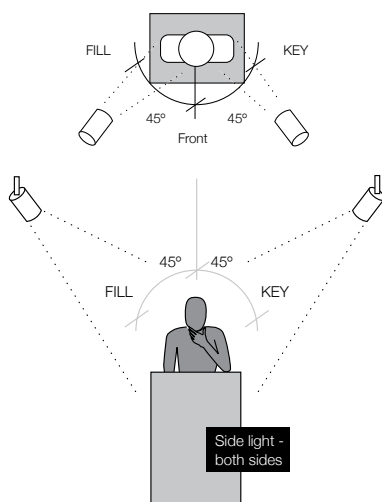


Accent Lighting of Flat Artwork

Flat art is ideally illuminated by a source striking its surface at a 30° angle. This eliminates veiling reflection (glare) from bouncing into a viewer's eye, and prevents casting a shadow of the viewer onto the artwork. To determine the correct distance from the wall you can use the formula below or quick reference chart.

The formula below is used to calculate luminaire distance from the wall for a 30° aiming angle where H = Distance from the center of the face of the light source to the aiming point and D = Distance from the wall to the center of the face of the light source. (The aiming point should be 1/3 down from the top of the picture or object.) $D = H \times .5774$

Example: $D = 4.0' \times .5774 = 2.31'$ or approximately 2'-4"

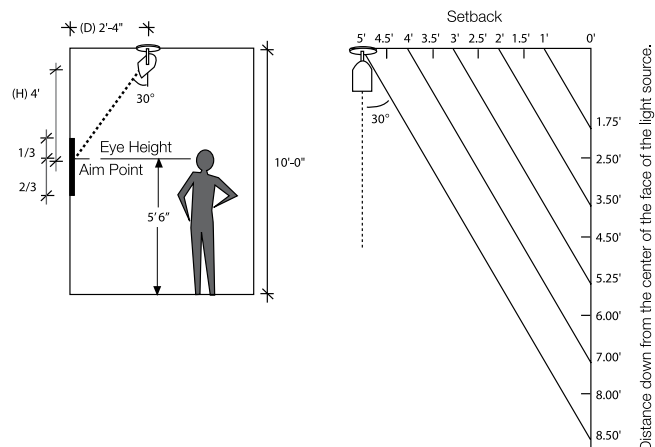


Lighting Control & Application Tips

Task Lighting

Task lighting can be accomplished using either spotlights or decorative pendants.


Task Lighting and Decorative Pendants

Decorative pendants provide both functional task lighting and add a visual interest and aesthetic character into a space. Pendants can be used singularly to light over small tables such as in an intimate restaurant or in groups to light elongated surfaces such as kitchen island counters or retail cash wraps or feature displays. For tables, the bottom edge of the pendants should typically be mounted 28" to 34" above the table. For work counters, the bottom edge of the pendants should typically be mounted 30" to 36" above the countertop.

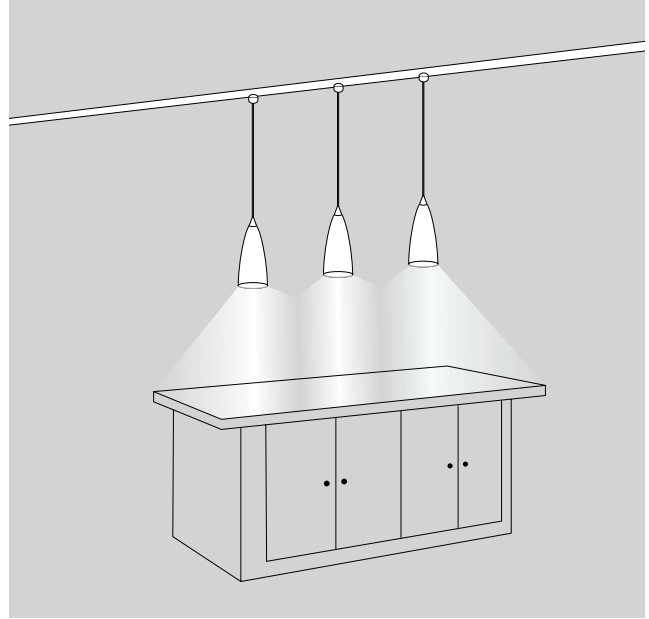

Task Lighting and Spotlights


When lighting tasks with track spotlights, the fixtures should be placed on each side of the task to minimize veiling reflections and glare. Avoid placing fixtures directly over a person's head so as not to create unnatural or unpleasant facial shadows. Complimentary fill lighting from another diffuse source is recommended. For illuminating countertops, place the track between the cabinet face and the front edge of the counter to avoid having the viewer standing in their own shadow. Since track and fixtures typically protrude below the ceiling, be mindful to allow enough clearance for cabinet doors to open.

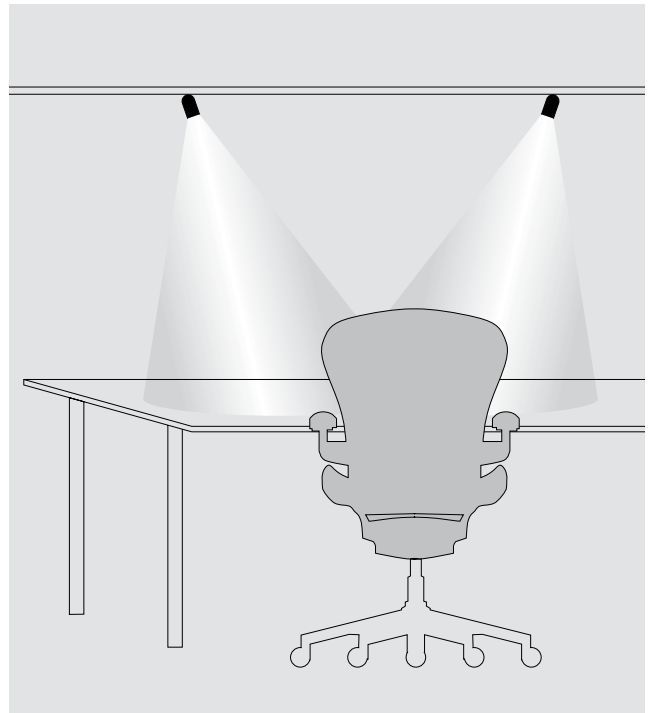

Lighting Control & Application Tips

Wall Lighting

Effective wall lighting can be accomplished using either directional sources with wider distributions or special wall wash luminaires employing special fixture reflector optics.

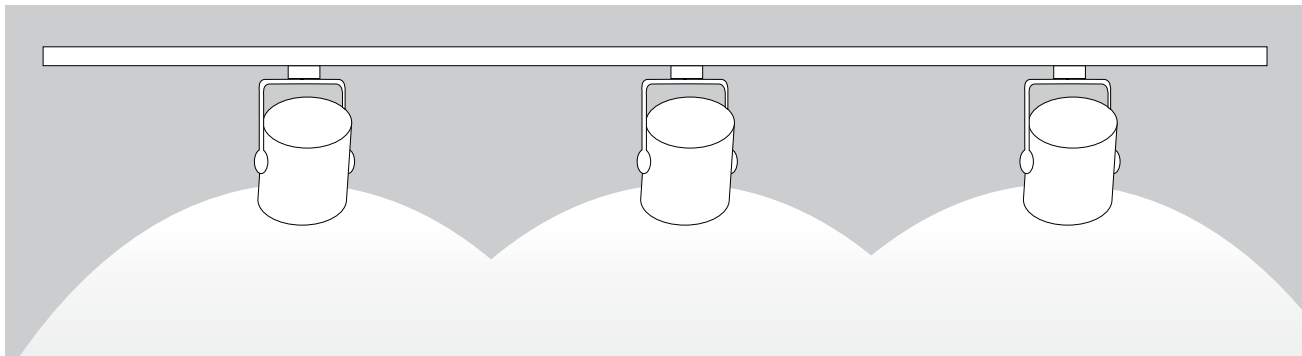


Wall Washing

Wall washing provides even, diffuse illumination of vertical surfaces such as walls, perimeter merchandise displays, signage and large artwork. To achieve uniform wall washing, track fixtures using lamps with flood distribution patterns are generally spaced apart equal to the distance the track is mounted away from the wall. The track should be positioned to preserve an approximate 30° aiming angle. Refer to the setback chart in the Accent Lighting section for placement guidelines. Track fixtures can also be spaced further apart to create a more distinct pattern of "light scallops" to create visual interest or a sense of scale.

Directional Sources

Directional sources can be effectively used to illuminate vertical surfaces creating different effects.

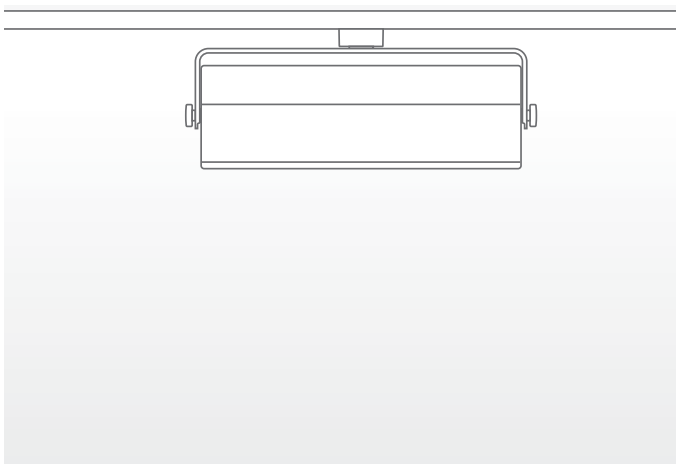

Rectangular Flood Fixtures

Rectangular flood fixtures can be used to provide attractive, uniform wall illumination. Rectangular floods are the most appropriate solution for retail and commercial spaces and are often used in combination with spotlights to highlight merchandise or objects for the best blend of efficiency and visual impact. Refer to the photometric section of individual fixture specification sheets for charts showing recommended fixture spacings, track setback from the wall and illumination levels.



Grazing

By placing track 6"-12" from a wall, a more dramatic grazing effect can be achieved on textured surfaces such as brick, stone or stucco.

(Note: Grazing is not recommended on smooth surfaces, as it will magnify any surface imperfections.)

Index

Catalog Number Page

Trac-Master®

CCLBL 375	28, 30, 31, 36, 54, 87
CCLBL 469	32, 34, 38, 39, 47, 51, 54, 87
CCLBL 550	47, 87
CGF 200	23, 24, 25, 29, 35, 49, 57, 86
CGF 275	26, 27, 86
CGF 375	28, 30, 31, 36, 54, 87
CGF 469	32, 34, 38, 39, 40, 47, 51, 54, 87
CGF 550	47, 87
CGF RECT3 CLEAR	42, 43
DCCF 200	23, 24, 25, 29, 35, 49, 57, 86
DGF 200	23, 24, 25, 29, 35, 49, 57, 86
DGF 275	26, 27, 86
DGF 375	28, 30, 31, 36, 54, 87
DGF 469	32, 34, 38, 39, 40, 47, 51, 54, 87
DIFF 200	23, 24, 25, 29, 35, 49, 57, 86
DIFF 275	26, 27, 86
DIFF 375	28, 30, 31, 36, 54, 87
DIFF 469	32, 34, 38, 39, 40, 47, 51, 54, 87
DIFF RECT3	42, 43
EYEBROWBL RECT3	42, 43
EYEBROWH RECT3	42, 43
HCLBL 200	23, 24, 25, 29, 35, 49, 57, 86
HCLBL 300	26, 27, 86
HCLBL 375	28, 30, 31, 36, 54, 87
HCLBL 469	32, 34, 38, 39, 47, 51, 54, 87
HCLBL RECT3	42, 43
LSPREAD 200	23, 24, 25, 29, 35, 49, 57, 86
LSPREAD 275	26, 27, 86
LSPREAD 375	28, 30, 31, 36, 54, 87
LSPREAD 469	32, 34, 38, 39, 40, 47, 51, 54, 87
PRISM 200	23, 24, 25, 29, 35, 49, 57, 86
PRISM 275	26, 27, 86
PRISM 375	28, 30, 31, 36, 54, 87
PRISM 469	32, 34, 38, 39, 40, 47, 51, 54, 87
SNOOTBL 200	23, 24, 25, 29, 35, 49, 57, 88
SNOOTBL 275	26, 27, 88
SNOOTBL 375	28, 30, 31, 36, 54, 89
SNOOTBL 469	32, 34, 38, 47, 51, 54, 89
SNOOTBL RECT3	42, 43
SOLITE 200	23, 24, 25, 29, 35, 49, 57, 86
SOLITE 275	26, 27, 86
SOLITE 375	28, 30, 31, 36, 54, 87
SOLITE 469	32, 34, 38, 39, 40, 47, 51, 54, 87
T Series Track	60
T27	62, 69
T28	60
T29	61
T31N	66, 72, 74
T32	66, 72, 74
T33	66, 72, 74
T34	61
T35	61
T36	61
T37D	65, 72
T37D916	65, 72
T37F	65, 72
T37F916	65, 72
T38	61
T39	65, 71
T40F	76
T40N	76
T41N	76
T42N	76
T47	78
T49	62
T56	65, 72
T58	76

Catalog Number Page

T71BL 375	54, 89
T72BL 469	54, 89
T90	64, 70
T90CLF	85
T91	64, 70
T91CLF	85
T92	65
T92L	65
T93	65, 71
T94	65, 71
T95	66, 72, 74, 75
T96	65, 71
T121	73
T122	61
T123	73
T132	78
T133	78
T230	50
T231	50
T239	50
T252L	35
T254L	36
T255L	38
T256L	44
T257L	45
T259L	42, 43
T260L	42
T261L	29
T262L	30
T263L	31
T265L	32
T267L	34
T271L	40
T272L	40
T283L	39
T285L	39
T286L	39
T308	53
T313	54
T315	54
T368	51
T381L	23
T382L	24
T383L	25
T385L	26
T387L	27
T388L	28
T537	79
T537QJ	79
T560BL	54, 87
T595	63, 70
T596	63
T597	63, 70
T598	63
T620	53
T687	52
T689	52
T690	52
T691	53
T770	39, 87
T831	22
T832	22
T841	49, 57
T1020	46
T1030	46
T1031S	46
T1038	47

Catalog Number Page

T1040	48, 56
T1051L	42
T1052L	42
T1053L	42
T1054L	42
T1056L	43
T1058L	43
T5774BL 469	39, 89
T5788BL 469	39, 89
T9091M	64, 71
TAH BLCK 469	47, 87
TAH BLCK 550	47, 87
TBDR BLCK 375	28, 30, 31, 36, 89
TBDR BLCK 440	40, 89
TBDR BLCK 469	32, 34, 38, 89
TBDR BLCK RECT3	42, 43
TCLCB	84
TCLF11	84
TCLF21	84
TCLFM11	84
TEW	75
TEWS	75
THCL1	40
TREC Series Track	73
T Series Track	67
TU20	69
TU21	67
TU23	69
TU24	69
TU25	69
TU26	69
TU28	67
TU29	68
TU34	68
TU35	68
TU36	68
TU38	68
TU598	70
TUCLF11	84
TUCLF21	84
TWL12	57, 75
TWLED	35
UVF 200	23, 24, 25, 29, 35, 49, 57, 86
UVF 275	26, 27, 86
UVF 375	28, 30, 31, 36, 54, 87
UVF 469	32, 34, 38, 39, 40, 47, 51, 54, 87
UVF RECT3	42, 43

INDEX

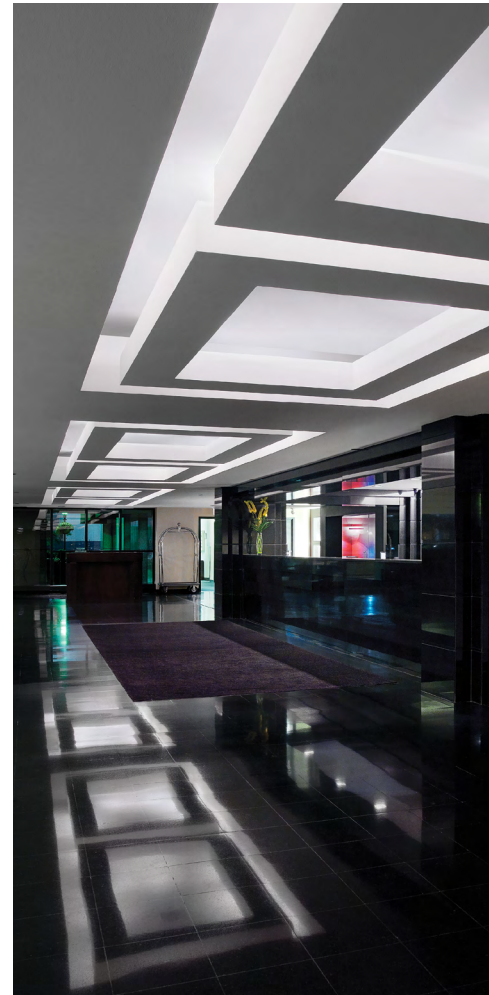


Photo Credits:

Top: LeMay-America's Car Museum®, Tacoma, WA (Doug Salin Photography); Bottom Left to Right: Anaheim Ducks, Honda Center, Anaheim, CA (Paul Nieboer Lighting, Designer); Johnny Cash Museum, Nashville, TN (Mark Steele Photography); Westin River North, Chicago, IL (Picture Boy Photography)

juno®