




50W 0-10V 'Dim to Dark' LED Driver

SOLOdrive

LED dimming made beautiful - SOLOdrive offers industry-best Natural Dimming to dark, with any dimmer, in any application. The SOLOdrive works seamlessly with LED modules, controls and intelligent luminaire elements.

Product offering

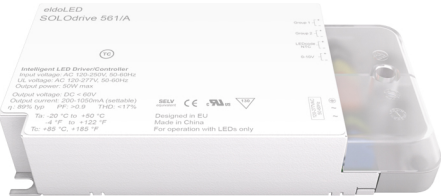

SOLOdrive 561/A

| | |
|---------------------|--|
| Part number (P/N) | SL0561A4 |
| Product description | SOLOdrive, 50W, 0-10V, 1 control channel, constant current, 2x 55V output, side feed, square metal/plastic |

Features & benefits

| | |
|----------------------|---|
| Natural dimming | Dim to dark, smooth brightness changes, excellent flicker performance, adaptable dimming curves, configurable minimum dimming level |
| LightShape | Dim to Warm: decrease colour temperature when dimming |
| LEDcode | Configurable design to work with most constant current LED modules and arrays, while providing a connection point to integrated peripheral controls |
| Programmable | Fine-tune your driver for any application |
| Performance | Universal input voltage range, low inrush current and total harmonic distortion (THD), high power factor and efficiency |
| Camera compatibility | Hybrid HydraDrive technology is proven to work in TV studios and security camera environments |

Programming tools

| | |
|-------------------------------------|---|
| Programming interface | TOOLbox pro (TLU20504) |
| Programming cable set | TOOLbox pro to LED driver, programming cable, 5pcs (TLC03051) |
| Programming Hand-held, Touch-and-Go | PJ0035HH1 |
| Programming jig | PJ0500S1 |
| Programming software | FluxTool |

Warranty

| | |
|-----------------|------------------------------|
| Warranty period | General Terms and Conditions |
|-----------------|------------------------------|

Order number configurator

| | | | | | | | | | | |
|--------------------------|--|---|--|--|---|---|--|---|---|---|
| Standard | <div>SL0561A4</div> <div>Part Number</div> | <div><div></div><div></div><div></div><div></div></div> <div>LED Output Current</div> | <div><div></div><div></div><div></div></div> <div>Dimming Curve</div> | <div><div></div><div></div></div> . <div></div> min <div>Minimum Dimming Level</div> | <div><div></div><div></div><div></div><div></div></div> <div>Start Up Performance</div> | | | | | |
| Multi-Current | <div>SL0561A4</div> <div>Part Number</div> | <div><div>M</div><div>C</div><div>U</div><div>R</div></div> <div>LED Output Current</div> | <div><div></div><div></div><div></div></div> <div>Dimming Curve</div> | <div><div></div><div></div></div> . <div></div> min <div>Minimum Dimming Level</div> | <div>CH1 - <div><div></div><div></div><div></div><div></div></div> mA</div> <div>LED Output 1</div> | <div>CH2 - <div><div></div><div></div><div></div><div></div></div> mA</div> <div>LED Output 2</div> | <div><div></div><div></div><div></div><div></div></div> <div>Start Up Performance</div> | | | |
| LightShape | <div>SL0561A4</div> <div>Part Number</div> | <div><div></div><div></div><div></div><div></div></div> <div>LED Output Current</div> | <div><div>D</div><div>T</div><div>W</div></div> <div>LightShape Control Type</div> | <div><div></div><div></div><div></div></div> <div>Dimming Curve</div> | <div><div></div><div></div></div> - <div><div></div><div></div></div> K <div>Gamut CCT</div> | <div><div></div><div></div></div> - <div><div></div><div></div><div></div></div> lm <div>Gamut Lumen Output</div> | <div><div></div><div></div></div> - <div><div></div><div></div></div> K <div>Path CCT</div> | <div><div></div><div></div><div></div><div></div></div> <div>Start Up Performance</div> | | |
| LightShape Multi-Current | <div>SL0561A4</div> <div>Part Number</div> | <div><div>M</div><div>C</div><div>U</div><div>R</div></div> <div>LED Output Current</div> | <div><div>D</div><div>T</div><div>W</div></div> <div>LightShape Control Type</div> | <div><div></div><div></div><div></div></div> <div>Dimming Curve</div> | <div>CH1 - <div><div></div><div></div><div></div><div></div></div> mA</div> <div>LED Output 1</div> | <div>CH2 - <div><div></div><div></div><div></div><div></div></div> mA</div> <div>LED Output 2</div> | <div><div></div><div></div></div> - <div><div></div><div></div></div> K <div>Gamut CCT</div> | <div><div></div><div></div></div> - <div><div></div><div></div><div></div></div> lm <div>Gamut Lumen Output</div> | <div><div></div><div></div></div> - <div><div></div><div></div></div> K <div>Path CCT</div> | <div><div></div><div></div><div></div><div></div></div> <div>Start Up Performance</div> |

Gamut CCT

Gamut Lumen Output

Example: SL0561A4 MCUR DTW LOG CH1-300mA CH2-400mA 18-50K 10-12lm 18-50K CA24

| | |
|-----------------------------------|---|
| LED output current, Standard | For models where output current is identical for all outputs. Enter value in 1mA increments, e.g. "811" for 811mA. |
| LED output current, Multi-Current | Output current different per output? Enter "MCUR" in LED output current and specify the differing currents in LED outputs 1 and 2. Note that cumulative current is limited. |
| LightShape control type | "DTW" stands for Dim to Warm |
| Dimming curve | "LOG" for logarithmic (default) "LIN" for linear "SLN" for soft-linear "SQU" for square |
| Minimum dimming level | Leave blank for default minimum dimming level of 0.1%. Specify in 0.1% increments, e.g. "10.5" for 10.5%. |
| Start-up performance | Enter "CA24" for improved start-up performance to comply with ENERGY STAR Luminaires v2.0 and the latest CA Title 24 standard, effective January 2017. |
| Gamut CCT | LightShape-specific option. Enter the LEDs' CCT as "XX-YY" where XX is LED output 1 and YY is LED output 2. Available options per output: 18, 20, 22, 25, 27, 30, 35, 40, 50, 57 and 65. E.g. "18-50" for 1800K on LED output 1 and 5000K on LED output 2. Default is 27-65 |
| Gamut lumen output | Enter the lumen output range for LED output 1 and 2 as "XX-YY" where XX is LED output 1 and YY is LED output 2. Available range per output: from "01" for 100lm to "99" for 9900lm. E.g. "10-12" for 1000lm on LED output 1 and 1200lm on LED output 2. |
| Path CCT | Leave blank if Path CCT requires the same values as Gamut CCT. Or specify the Path CCT values as "XX-YY" where XX is LED output 1 and YY is LED output 2. Available options per output: 18, 20, 22, 25, 27, 30, 35, 40, 50, 57, 65. E.g. "18-50" for 1800K on LED output 1 and 5000K on LED output 2. |


Input characteristics

| | |
|------------------------------|--|
| Nominal input voltage range | 120 - 250 VAC (ENEC), 120 - 277 VAC (UL) |
| | 120 - 250 VDC |
| Absolute input voltage range | 108 - 305 VAC |
| Input frequency range | 50 - 60 Hz |
| Maximum input current | 0.65A @ 120 VAC |
| | 0.36A @ 230 VAC |
| | 0.30A @ 277 VAC |
| Efficiency at full load | 87.5% |
| Power factor at full load | > 0.95 |
| THD at full load | < 15% |
| Maximum inrush current | < 100mA²s @ 120 VAC |
| | < 100mA²s @ 230 VAC |
| | < 100mA²s @ 277 VAC |
| Surge protection | 2kV differential mode (DM) |
| | 2kV common mode (CM) |
| Maximum standby power | < 0.5W |

Output characteristics

| | |
|---------------------------------------|---|
| Maximum LED output power | 50W |
| Number of LED outputs | 2 |
| | (UL Class 2) |
| Programmable LED output current range | 150 - 1400mA |
| LED output type | Programmable in 1mA increments within specified current range |
| LED output current tolerance | +/- 5% at programmed LED output current |
| LED output voltage range | 2 - 55V |


Operating window

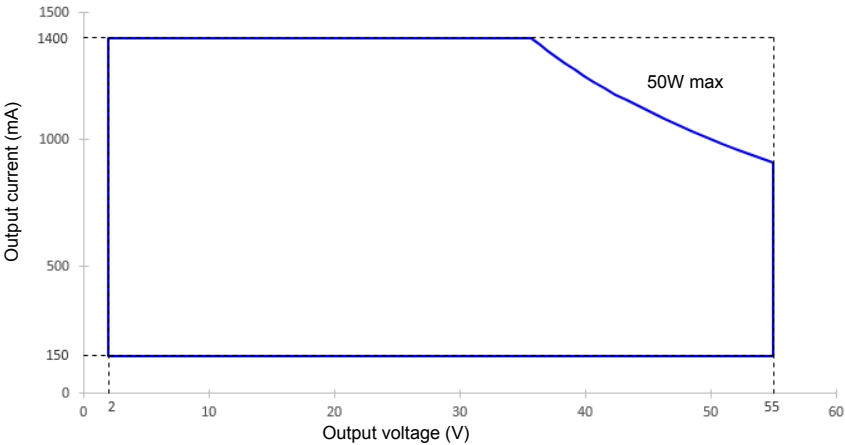


Control characteristics

| | |
|-----------------------|--|
| Control channels | 1 |
| Control protocol | 0-10V |
| | LEDcode |
| Dimming range | 100% - 0.1% |
| Dimming curve options | Logarithmic (default) Linear Soft-Linear Square |
| LightShape | Dim to Warm, 2x pc-white |
| Dimming method | Hybrid HydraDrive |
| 0-10V current draw | < 2mA |
| Time delay to standby | < 30s |

0-10V dimming chart

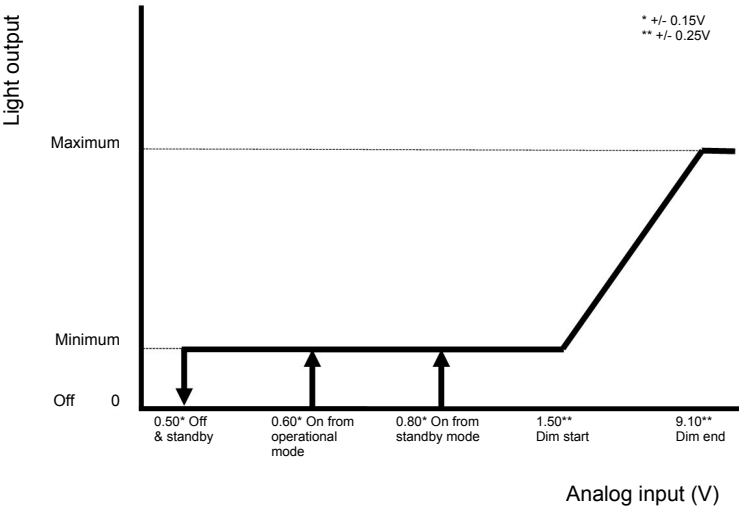


Dimming curves

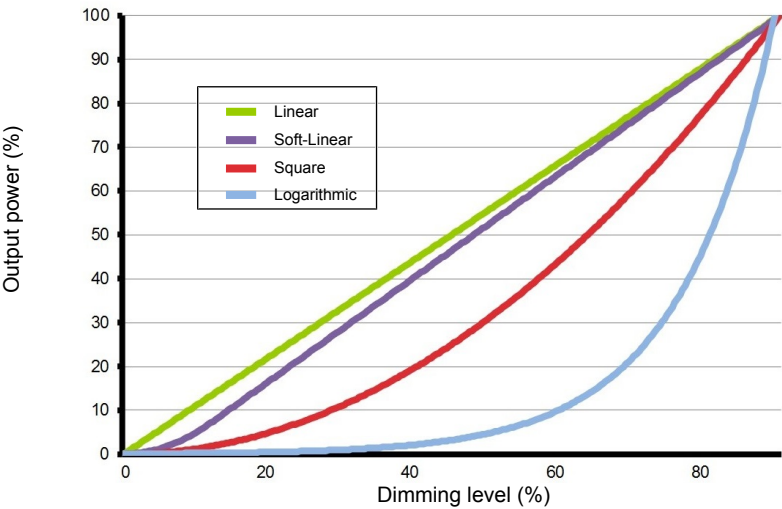

Performance


Typical efficiency vs load

Tested with a load on each LED output of 16 LEDs in series, programmed for 1000mA and at 25 °C ambient temperature. The measurements below 50W were performed by dimming the light output.

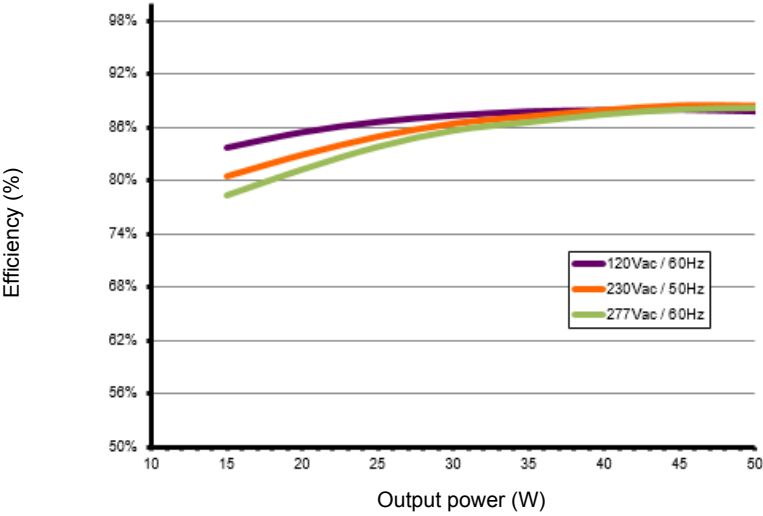


Typical power factor vs load

Tested with a load on each LED output of 16 LEDs in series, programmed for 1000mA and at 25 °C ambient temperature. The measurements below 50W were performed by dimming the light output.

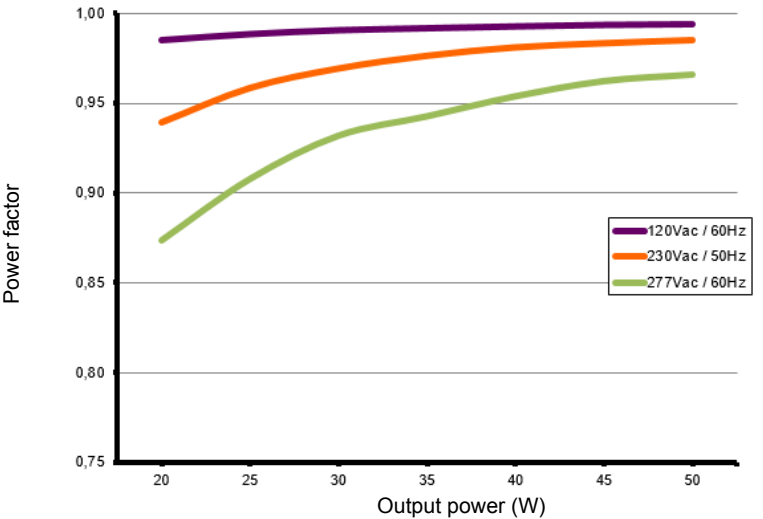


Typical THD vs load

Tested with a load on each LED output of 16 LEDs in series, programmed for 1000mA and at 25 °C ambient temperature. The measurements below 50W were performed by dimming the light output.

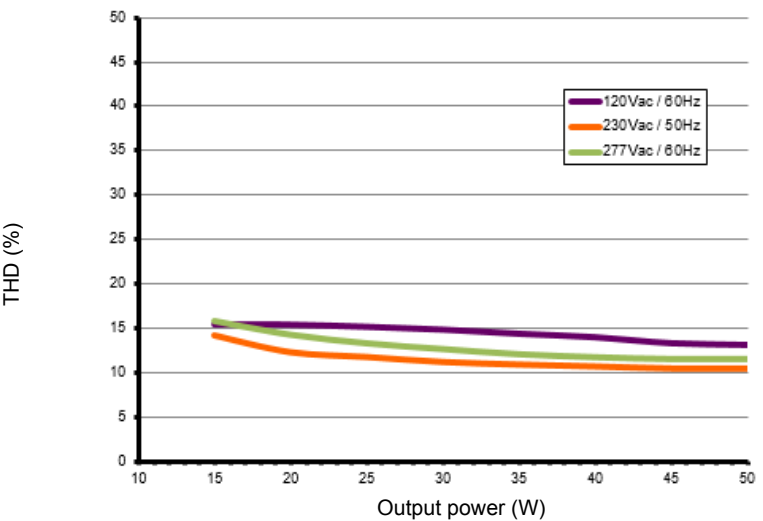

Typical flicker performance


Typical flicker percent as a function of frequency, measured across the dimming range. The results are overlaid with the low-risk (yellow) and no observable effect (green) levels as defined in IEEE P1789.

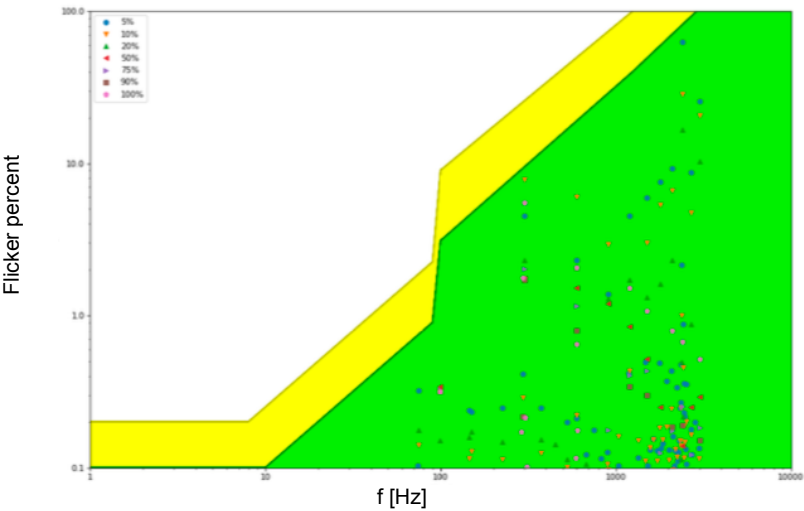

Environmental conditions

| | |
|---|---|
| Operating ambient temperature (Ta) range | -20 °C to +50 °C |
| Maximum operating case temperature (Tc max) | 83 °C |
| Acoustic noise – steady state | <24dBA (Class A) |
| Lifetime | 50,000 hours at a maximum case temperature (Tc) of 76 °C |
| UL Type TL | Measured Tref: 63 °C Maximum allowed Tref: 83 °C Measured at 1400mA |

Tc point location

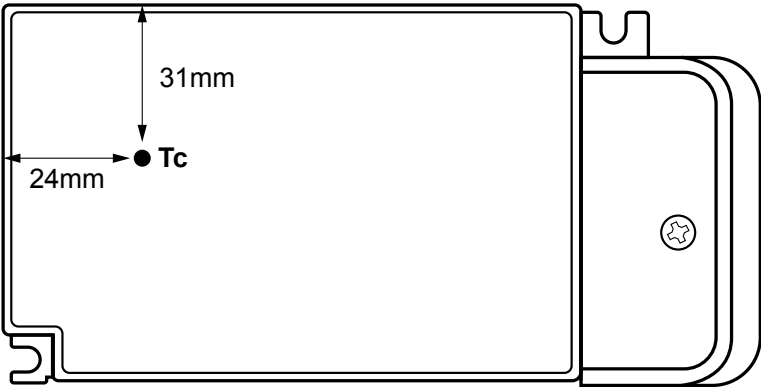


LED driver protection

| | |
|--------------------------|---|
| Thermal | The LED output current is automatically decreased whenever the internal driver temperature exceeds a factory preset temperature. The LED output current is increased once the internal driver temperature drops below the preset temperature threshold. If the internal driver temperature continues to increase, despite a decrease in output current, the LED driver will eventually shut down. |
| LED output short circuit | The LED output current is cut off whenever the LED driver detects a short-circuit. The LED driver will attempt a restart every 400ms after a short-circuit is detected. |
| LED output open circuit | All LED outputs are turned off whenever the LED driver detects an open circuit on any one of the LED outputs. The LED driver will automatically attempt a restart every 400ms after an open circuit is detected. |
| LED output overload | The driver monitors the cumulative load across all LED outputs. Whenever this cumulative load exceeds the maximum output power rating of the LED driver, the output current on all LED outputs is sequentially scaled down until the cumulative load drops below the maximum output power rating of the LED driver. |
| Reverse polarity | The LED driver will not yield any current if the polarity of the load on the LED output is reversed. This situation will not damage the LED driver but may damage the LED load. |

LED protection

| | |
|------------------------|---|
| Thermal protection LED | An external NTC thermistor, which is placed on a PCB near the LEDs, can be connected to the driver via the LEDcode/NTC terminals. The output current to the LEDs is then decreased by 75% whenever the NTC exceeds a maximum allowable temperature, which is specified by the user in the FluxTool software. The default NTC temperature limit is set to 70 °C. |
| Thermistor value | 47kΩ |
| Suitable thermistors | Leaded: Vishay, P/N 238164063473 Screw: Vishay, P/N NTCASCWE3473J |

LED driver mechanical details

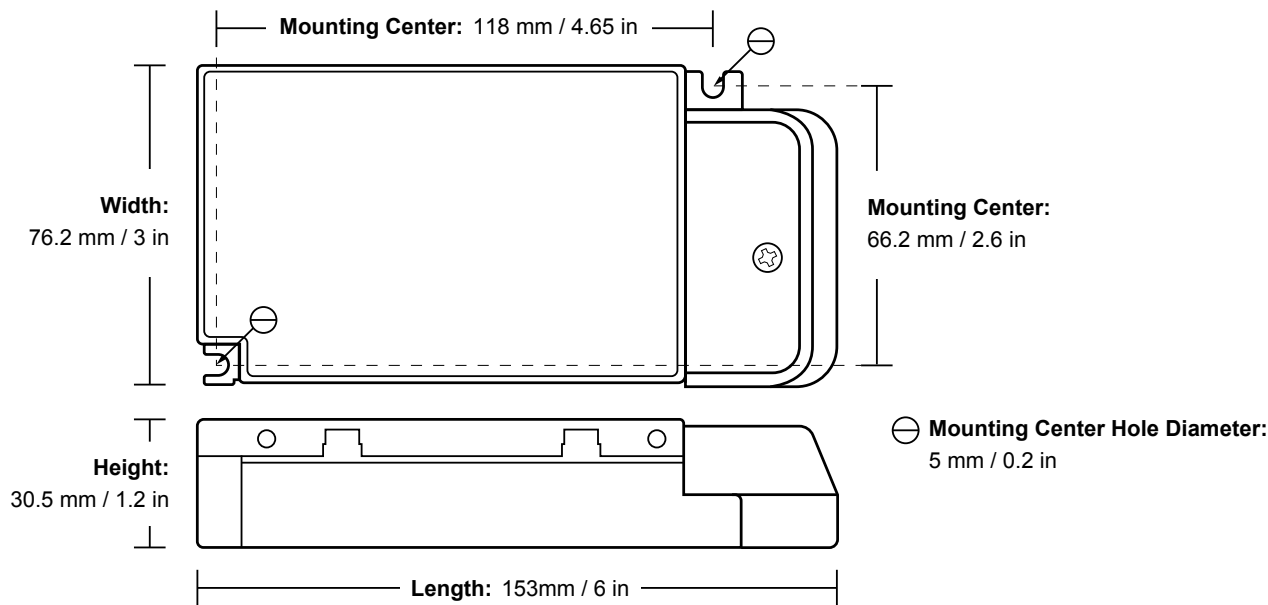


| | |
|-----------------|---------------------|
| Weight | 293 g |
| Mounting torque | Not to exceed 0.5Nm |

3D Mechanical files for this product are available on the eldoLED website.

Packaging

| | |
|-----------------------------|-------------------------------------|
| Length x Width x Height | 508 x 305 x 178 mm / 20 x 12 x 7 in |
| Weight (including products) | 15 kg |
| Products per box | 40 pcs |

Connector layout

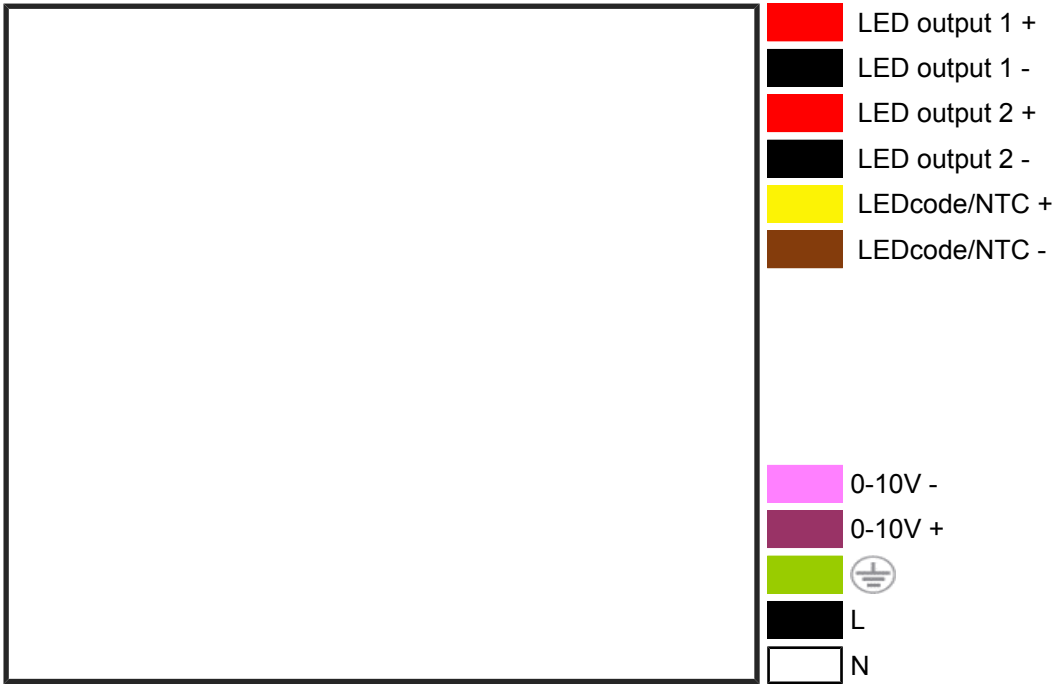

Input wiring specifications

| | |
|-------------------------------|--|
| Connector type | push-in terminals |
| Connector supplier and series | Wago 250 series |
| Wire type | solid or stranded copper |
| Wire core cross section | 0.5 - 1.5mm ² / AWG 20 – 16 |
| Wire strip length | 9.0mm (11/32in) |

Output wiring specifications

| | |
|--|---|
| Connector type | push-in terminals |
| Connector supplier and series | Wago 250 series |
| Wire type | solid or stranded copper |
| Wire core cross section | 0.5 - 1.5mm² / AWG 20 – 16 |
| Wire strip length | 9.0mm (11/32in) |
| Maximum remote mounting distance of LED load | For independent use: 2 m / 6.5 ft For in-fixture use: AWG 20 (0.52 mm²) - 14 m / 46 ft AWG 19 (0.65 mm²) - 18 m / 59 ft AWG 18 (0.82 mm²) - 22 m / 72 ft AWG 17 (1.04 mm²) - 28 m / 92 ft AWG 16 (1.31 mm²) - 36 m / 118 ft |

Automatic circuit breakers (MCB)

| | | | | | | | |
|-----------------|-----------------------|-----|-----|-----|-----|-----|-----|
| Maximum loading | MCB type | B10 | B13 | B16 | C10 | C13 | C16 |
| | Number of LED drivers | 14 | 18 | 22 | 14 | 18 | 22 |

RCM independent control gear classification

| | | | |
|--|---|---|--|
| Regulation AS/NZS 60598.2.2 | | Applies when the control gear is built inside constructions | |
| Clearance type | Description | Distance | |
| Height clearance to building element (HCB) | Minimum distance between the top of the control gear and any building element above it | 50 mm | |
| Minimum insulation clearance (MIC) | Minimum distance between the top of the control gear and the building insulation above it | 50 mm | |
| Side clearance to building element (SCB) | Minimum distance between the side of the control gear and any building element | 50 mm | |
| Side clearance to insulation (SCI) | Minimum distance between the side of the control gear and any building insulation | 50 mm | |
| RISK OF FIRE | | BUILDING INSULATION MUST NOT COVER THE CONTROL GEAR | |

Standards and compliance

| | |
|---|---|
| UL, recognized component | UL 1310 UL 8750 (Class 2 output). Type TL LED driver. |
| ENEC safety | EN 61347-1 EN 61347-2-13 (Emergency lighting) |
| ENEC performance | EN 62384 |
| Conducted emissions | EN 55015 FCC title 47 CFR part 15 class B |
| Radiated emissions | EN 55015 FCC title 47 CFR part 15 class B |
| Radio disturbance characteristics | EN 55022 |
| Harmonic current emissions | EN 61000-3-2 |
| Electrostatic discharge | EN 61000-4-2 |
| RFE field susceptibility | EN 61000-4-3 |
| Electrical fast transient | EN 61000-4-4 |
| Surge immunity | EN 61000-4-5 |
| Conducted radio frequency | EN 61000-4-6 |
| Voltage dips | EN 61000-4-11 |
| Electromagnetic immunity | EN 61547 |
| ECOfdesign 2019/2020: Controlgear + luminaire | Flicker for LED: Pst LM \leq 1.0 at full-load Stroboscopic effect for LED: SVM \leq 0.4 at full load |
| 0-10V | IEC/EN 60929 annex E NOTE: From 0.6V to 10V eldoLED LED drivers comply with IEC/EN 60929 annex E. Below 0.6V eldoLED LED drivers comply with ABL 0-10V Design Spec v1.2 enabling standby mode. For detailed dimming characteristics see 0-10V response chart in Control Characteristics. |
| Surge protection | IEC 61000-4-5 level 3: 2kV DM, 2kV CM @ 2 Ohm |
| Surge protection | ANSI 62.41 1991 category B1: 2.5kV DM, 2.5kV CM @ 30 Ohm 0-10V input: 0.5 kV DM, 1 kV CM surge |
| RCM | AS/NZS 61347.1, AS/NZS 61347.2.13 |
| Restriction of hazardous substances | RoHS3 (Directives 2011/65/EU-2015/863/EU) |



SVHC-list substances

REACH Art.33

Certifications



Safety

| | |
|--|---|
|  | An independent control gear that can be used where normally flammable materials, including building insulation, are or may be present, but cannot be abutted against any material and cannot be covered in normal use. |
|  | FELV control terminals marked “Risk of electric shock” are not safe to touch. Dimming connected to FELV control terminal shall be insulated for Low Voltage supply of the control gear. Any terminals connected to the FELV circuit shall be protected against accidental contact. |
|  | Risk of electrical shock. May result in serious injury or death. Disconnect power before servicing or installing. |
|  | <p>The LED driver may only be connected and installed by a qualified electrician. All applicable regulations, legislation, and building codes must be observed. Incorrect installation of the LED driver can cause irreparable damage to the LED driver and the connected LEDs.</p> <p>Pay attention when connecting the LEDs: polarity reversal results in no light output and often damages the LEDs.</p> |
|  | LED drivers are designed and intended to operate LED loads only. Powering non-LED loads may push the LED driver outside its specified design limits and is, therefore, not covered by any warranty. |
|  | eldoLED products are designed to meet the performance specifications as outlined at certain operating conditions in the data sheet. It is the responsibility of the fixture manufacturer to test and validate the design and operation of the system under expected and potential use cases, including faults. |
|  | Please observe voltage drop over long cable lengths. Longer cable lengths increase EMI susceptibility. |
|  | Product renderings and dimensional drawings are generic for the housing type. Product label, connector type and quantity may vary. |

Europe, Rest of World

eldoLED B.V.
Science Park Eindhoven 5125
5692 ED Son
The Netherlands

E: info@eldoled.com
W: www.eldoled.com

North America

eldoLED America
One Lithonia Way
Conyers, GA 30012
USA

E: info@eldoled.com
W: www.eldoled.com