



Certified in CA TITLE 20  
Appliance Efficiency Database -  
Battery Charger



**SLIM PROFILE**  
FOR NARROW COMPARTMENTS



## DESCRIPTION

The **ILBSL CP08 HE** from IOTA is a UL Listed LED emergency driver that allows the same LED fixture to be used for both normal and emergency operation. In the event of a power failure, the **ILBSL CP08 HE** switches to the emergency mode and operates the existing fixture for **90 minutes**. The unit contains a battery, charger, and converter circuit in a single slim profile enclosure for installation within the channel space or wireway. The **ILBSL CP08 HE** will operate an LED array load at **8 watts** with **constant power** at a rated output voltage of **10V-60V**. The Constant Power design of the **ILBSL CP08 HE** maintains the output wattage to the LED array, providing consistent illumination for the entire emergency runtime. The **ILBSL CP08 HE** features high-efficiency performance and is certified in the CA Title 20 Appliance Efficiency Database.

## SPECIFICATIONS

Input Voltage	(Universal) 120-277VAC, 50/60Hz
Input Rating (120/277)	2.9 Watts (max)
Output Voltage <sup>1</sup>	10-60VDC Class 2 Compliant
Output Current	0.8A (@10VDC) - 0.13A (@60VDC)
Output Power	8 Watts (constant)
Max. AC Driver Output Current	3Adc
Power Factor	≥ 0.9 at 120VAC <sup>2</sup>
Surge Protection	Meets ANSI/IEEE C62.41.2-2002
Emergency Operation	90 minutes
Operating Temp.	0° to 55° C
THD	< 15% (@ full charge)
EMI	Complies to FCC commercial limits
Battery	High Temp Nickel-Cadmium 24 Hour Recharge 7-10 Year Life Expectancy
Weight (configuration)	2.25 lbs.
Certifications	UL Listed for factory and field installation CSA C22.2 No 141

<sup>1</sup>Max. output voltage in emergency mode is 58.5 VDC with a + tolerance of 1.5 volts


<sup>2</sup>PF ≥ 0.75 at 277VAC

CA T20 Appliance Efficiency Database



## DIMENSIONS

22.17" x 1.18" x 1.18"  
(mounting center 21.77 x 0.67")

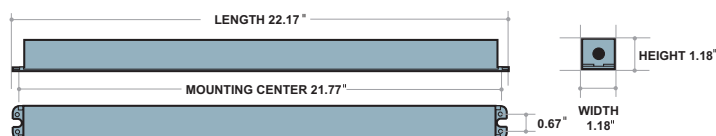

MODEL NO: \_\_\_\_\_  
TYPE: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
COMMENTS: \_\_\_\_\_

## LUMEN PERFORMANCE

Fixture Efficacy	Minute 1	Minute 45	Minute 90
100 lm/W	800	800	800
110 lm/W	880	880	880
120 lm/W	960	960	960
130 lm/W	1040	1040	1040

## PRODUCT ADVANTAGES

- **Certified for CA Title 20**  
High Efficiency Performance meets CA Title 20 battery charger efficiency standards
- **Auto-Sensing Class 2 Output**  
Auto-adjusting 10-60 VDC output range accommodates a full range of Class 2 forward voltage LED designs
- **Constant Power Performance**  
Constant wattage delivery maintains illumination for the full emergency runtime with no degradation
- **Slim Profile Design**  
Slim profile enclosure allows integral installation within restrictive and narrow channel spaces
- **Listed for Field or Factory Installation**  
UL Listed for both field or factory installation in United States and Canada

## FEATURES

- UL 924 Listed, UL Listed and Classified to FTBV
- UL 1310 Certified, Output Class 2 Compliant
- Long life high temperature recyclable Ni-Cad battery
- Galvanized steel case
- Includes single-piece TBTS test switch and charge indicator accessory kit
- For use with switched or unswitched fixtures
- **5-Year Warranty.**
- Meets or exceeds all NEC, IBC, and Life Safety Code Emergency Lighting Requirements
- Suitable for use in Plenum, Damp Location, Recessed Type IC, and Enclosed and Gasketed Luminaires
- RoHS Compliant



# ILBSL CP08 HE

Constant Power High Efficiency Emergency LED Driver

## ORDERING GUIDE

ILBSL

CP08

HE



### Understanding Your IOTA Driver Model:

**ILBSL** = Slim Profile IOTA Emergency LED Driver  
**CP\*\*** = Constant Power Performance at the rated wattage  
**HE** = High Efficiency for CA Title 20

### ILBSL CP08 HE Sample Specification

Supply and install IOTA ILBSL CP08 HE Constant Power emergency LED driver system as indicated on the plans. The emergency driver shall be designed for [Select "Internal" or "External"] mounting to the luminaire including a self-contained, high-temperature, sealed, maintenance-free nickel cadmium battery rated for a 10-year service life. The unit shall be provided complete with an illuminated push to test switch. The emergency driver system shall be UL class 2 certified in accordance with UL 1310 and shall be UL listed for use in damp locations and in enclosed and gasketed fixtures with a temperature range of 0° to 55° C.

The AC input shall be a two-wire, universal voltage capable 120 thru 277 VAC, 50/60 Hz and be UL Listed to Category Control Number (CCN) FTBR, Emergency Lighting and Power Equipment, and FTBV, Emergency Light-Emitting-Diode Drivers for field installation. Maximum input power of the emergency driver shall be 2.9 watts. The unit shall monitor and adjust the input power consumption and be certified in the CA Title 20 Modernized Appliance Efficiency Database System (MAEDBS) as a small battery charger.

The unit charger shall consist of a two-stage charging system which samples the battery in relation to its temperature, state of charge and input voltage fluctuations. The charger shall be current limited, temperature compensated, short-circuit protected with reverse polarity protection. A low voltage battery disconnect (LVD) circuit shall be provided and will disconnect the load and circuitry from the battery when it reaches approximately 80 to 85% of its nominal terminal voltage, preventing a non-recoverable, deep-discharge condition as well as equipment initialization failure when utility power is restored. The unit shall achieve a full recharge in 24-hours.

The emergency driver shall accommodate an LED load with a forward voltage requirement ranging from 10 to 60 VDC. The output voltage sensing shall be automatic and instantaneous with a resulting, inversely-proportional current to maintain constant power to the LED array with an output tolerance of +/- 3%. The unit shall supply the rated load for a minimum of 1 1/2 hours or to 87 1/2% of rated battery terminal voltage. The output power to the LED load during emergency operation shall be held constant 8 watts from minute one throughout the entire emergency run time resulting in no loss or degradation of the light source during emergency operation.

The unit shall be furnished with an electronic, AC-lockout circuit which will connect the battery when the AC circuit is activated, and an electronic brownout circuit which will enable a transfer to emergency operation when utility power dips below an acceptable level. Maximum remote mounting distance of the emergency driver shall be 50-feet.

### Emergency Lumen Performance - ILBSL CP08 HE

Approx. Luminaire Efficacy	Minute 1	Minute 45	Minute 90
100 lm/W	800	800	800
110 lm/W	880	880	880
120 lm/W	960	960	960
130 lm/W	1040	1040	1040



Visit [www.iotaengineering.com/cptools](http://www.iotaengineering.com/cptools) to access our on-line ILB CP performance calculator for additional performance data and other specification resources.



The **ILBSL CP08 HE** is UL Listed and Classified for Field Installation. Refer to the "**CP Series Compatibility and Suitability of Use Guidelines**" addendum for complete project installation requirements.

## ACCESSORIES

### ☐ TMKISL Top Mount Cover

When top-mounting ILBSL CP units, the TMKISL is used to cover the exposed wiring that goes from the battery pack into the fixture.

### Warranty: 5-Year Limited Warranty

Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)