

# Juno®


## FIREWALL™ LED Downlight Series

4" Fire-Rated Internally Adjustable LED Downlight New Construction

### IC4ALFW Series



### Dimensions

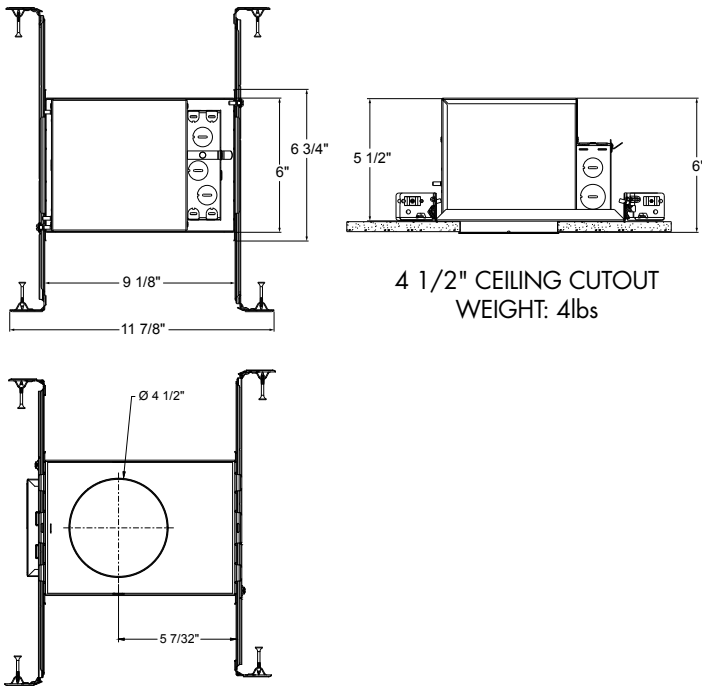

For use with standard Juno downlight trims:

Angle Cut



Downlight



Slot



Lensed



Square



Slope



Project:

Fixture Type:

Location:

Contact/Phone:

### Product Features

All-in-one 4" LED fire-rated downlight with integral internally adjustable light engine for downlighting and accent lighting in the same housing. Versatile trim offering to address the needs of modern architectural designs.

Patent pending integrated low smoke intumescent barrier

- Eliminates the need for installers to build additional boxes around fixtures to meet fire ratings
- Provides protection against the spread of heat and flames into the ceiling cavity for 1 hour and 2 hour fire ratings
- Reduces sound transmission between floors

Easy installation and servicing

- Low profile integrated LED downlight less than 6" in height
- Easy to handle compact size weighing only 4 lbs
- Installs into wood joists with Real Nail® 3 bar hangers

### Applications

- Residential and commercial applications including multi-family, hotels, assisted living, dormitories and other multi-level construction
- Shallow plenum, new construction
- IC rated - for direct contact with insulation

### Fire Resistance Specifications:

- Conforms to UL263, ASTM STD E119 and CAN/ULC-S101 US and Canadian installations
- May be used in fire resistance floor-ceiling and roof-ceiling designs per UL Fire Classified Directories CDHW and CDHW7
- 1 hour fire rated floor/ceiling and roof/ceiling gypsum assembly per UL Design No. L500 & P500
- 2 hour fire rated floor/ceiling gypsum assembly per UL Design No. L500, L505, L511, L536, L538, L541, L556, L577, M500, M510, M521 & M543

### Performance

Delivered Lumens	700L, 1000L
LED Color Temperature	27K, 30K, 35K, 40K
CRI	90+
Voltage	Dedicated 120V or MVOLT (120-277V)
Dimming	Forward/Reverse Phase or 0-10V
Optics	Spot, Narrow Flood or Flood



# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction



### ORDERING INFORMATION

#### 4" Housings

Example: IC4ALFW 07LM 27K 90CRI FL 120 FRPC

Series	Lumens	Color Temperature	CRI	Distribution	Voltage/Driver
<b>IC4ALFW</b> 4" LED Fire-rated IC New Construction Internally Adjustable Downlight	<b>07LM</b> 700 Nominal Lumens	<b>27K</b> 2700K	<b>90CRI</b> 90+ CRI	<b>FL</b> Flood	<b>120 FRPC</b> 120V Forward/Reverse Phase Cut, 5% dim
	<b>10LM</b> 1000 Nominal Lumens	<b>30K</b> 3000K		<b>NFL</b> Narrow Flood	<b>MVOLT ZT</b> Multi-Volt (120-277), 0-10V, 10% dim
		<b>35K</b> 3500K		<b>SP</b> Spot	<b>MVOLT EZ10</b> Multi-Volt (120-277), eldoLED 0-10V, 10% dim
		<b>40K</b> 4000K			<b>MVOLT EZ1</b> Multi-Volt (120-277), eldoLED 0-10V, 1% dim



A+ Capable options indicated by this color background

### ACCESSORIES (ordered separately)

Catalog Number	Description
CGF 200 MPINK	Color Glass Filter - 2" Diameter - Medium Pink
CGF 200 WRED	Color Glass Filter - 2" Diameter - Warm Red
CGF 200 DLTBLUE	Color Glass Filter - 2" Diameter - Daylight Blue
CGF 200 MBLU	Color Glass Filter - 2" Diameter - Medium Blue
CGF 200 MAMB	Color Glass Filter - 2" Diameter - Medium Amber
CGF 200 MGRN	Color Glass Filter - 2" Diameter - Medium Green
DGF 200 DRED	Dichroic Glass Filter - 2" Diameter Red
DGF 200 MGRN	Dichroic Glass Filter - 2" Diameter Medium Green
DGF 200 MBLU	Dichroic Glass Filter - 2" Diameter Medium Blue
DGF 200 DYEL	Dichroic Glass Filter - 2" Diameter Yellow (Dichroic)
DGF 200 MAGEN	Dichroic Glass Filter - 2" Diameter Magenta
DGF 200 CYAN	Dichroic Glass Filter - 2" Diameter Cyan
DCCF 200 HL4250	Dichroic Color Correction Filter - 2" Diameter - Halogen - to - Daylight
DIFF 200	Diffusion Glass Lens - 2" Diameter
UVF 200 UV	Filter Lens - 2" Diameter
HCLBL 200	Hexagonal Cell Louver - Black - 2" Diameter
LSPREAD 200	Linear Spread Glass Lens - 2" Diameter
PRISM 200	Prismatic Glass Lens - 2" Diameter
TIR2 SPT	Optic - Spot
TIR2 NFLD	Optic - Narrow Flood
TIR2 FLD	Optic - Flood



# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### IC4ALFW - Compatible Trims


#### OPEN/DOWNLIGHT TRIMS

Trim Series	Dimensions	Aperture	Catalog No.	Notes
	5"	3-3/8"	<b>42L BBL</b>	4" Downlight Cone Trim - Black Alzak® Cone, Black Trim Ring
	5"	3-3/8"	<b>42L BWH</b>	4" Downlight Cone Trim - Black Alzak® Cone, White Trim Ring
	5"	3-3/8"	<b>42L CWH</b>	4" Downlight Cone Trim - Clear Alzak® Cone, White Trim Ring
	5"	3-3/8"	<b>42L HZWH</b>	4" Downlight Cone Trim - Haze Cone, White Trim Ring
	5"	3-3/8"	<b>42L PTSC</b>	4" Downlight Cone Trim - Pewter Alzak® Cone, Satin Chrome Trim Ring
	5"	3-3/8"	<b>42L WHZBRZ</b>	4" Downlight Cone Trim - Wheat Haze Cone, Bronze Trim Ring
	5"	3-3/8"	<b>42L WHZWH</b>	4" Downlight Cone Trim - Wheat Haze Cone, White Trim Ring
	5"	3-3/8"	<b>42L WWH</b>	4" Downlight Cone Trim - Gloss White Cone, White Trim Ring

Notes




#### ANGLE CUT TRIMS

Trim Series	Dimensions	Aperture	Catalog No.	Notes
	5"	3-3/8"	<b>47L BBL</b>	4" Adjustable Angle Cut Cone Trim - Black Alzak® Cone, Black Trim Ring
	5"	3-3/8"	<b>47L BWH</b>	4" Adjustable Angle Cut Cone Trim - Black Alzak® Cone, White Trim Ring
	5"	3-3/8"	<b>47L CWH</b>	4" Adjustable Angle Cut Cone Trim - Clear Alzak® Cone, White Trim Ring
	5"	3-3/8"	<b>47L HZWH</b>	4" Adjustable Angle Cut Cone Trim - Haze Cone, White Trim Ring
	5"	3-3/8"	<b>47L PTSC</b>	4" Adjustable Angle Cut Cone Trim - Pewter Alzak® Cone, Satin Chrome Trim Ring
	5"	3-3/8"	<b>47L WHZBRZ</b>	4" Adjustable Angle Cut Cone Trim - Wheat Haze Cone, Bronze Trim Ring
	5"	3-3/8"	<b>47L WHZWH</b>	4" Adjustable Angle Cut Cone Trim - Wheat Haze Cone, White Trim Ring
	5"	3-3/8"	<b>47L WWH</b>	4" Adjustable Angle Cut Cone Trim - Gloss White Cone, White Trim Ring


Notes



#### SLOT ADJUSTABLE TRIM

Trim Series	Dimensions	Aperture	Catalog No.	Notes
	5"	3-3/8"	<b>45L WH</b>	4" Adjustable Slot Trim - White


#### LENSED TRIMS

Trim Series	Dimensions	Aperture	Catalog No.	Notes
	5"	3-3/8"	<b>41L BRZ</b>	4" Adjustable Lens Shower Trim - Bronze
	5"	3-3/8"	<b>41L SC</b>	4" Adjustable Lens Shower Trim - Satin Chrome
	5"	3-3/8"	<b>41L WH</b>	4" Adjustable Lens Shower Trim - White

Notes



#### WALL WASH TRIMS

Trim Series	Dimensions	Aperture	Catalog No.	Notes
	5"	3-3/8"	<b>39 BBL</b>	4" Lensed Wall Wash Cone Trim - Black, Black Trim Ring
	5"	3-3/8"	<b>39 CWH</b>	4" Lensed Wall Wash Cone Trim - Clear Alzak, White Trim Ring
	5"	3-3/8"	<b>39 WWH</b>	4" Lensed Wall Wash Cone Trim - White, White Trim Ring
	5"	3-3/8"	<b>39 HZWH</b>	4" Lensed Wall Wash Cone Trim - Haze, White Trim Ring
	5"	3-3/8"	<b>39 WHZWH</b>	4" Lensed Wall Wash Cone Trim - Wheat Haze, White Trim Ring






# FIREWALL™ LED Downlight Series



## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### IC4ALFW - Compatible Trims

#### SQUARE TRIMS

Trim Series	Dimensions	Aperture	Catalog No.	Notes
	5"	3-3/8"	<b>47LSQ BBL</b>	4" Square Adjustable Angle Cut Reflector Trim - Black, Black Trim Ring
	5"	3-3/8"	<b>47LSQ BWH</b>	4" Square Adjustable Angle Cut Reflector Trim - Black, White Trim Ring
	5"	3-3/8"	<b>47LSQ HZWH</b>	4" Square Adjustable Angle Cut Reflector Trim - Haze, White Trim Ring
	5"	3-3/8"	<b>47LSQ WHZWH</b>	4" Square Adjustable Angle Cut Reflector Trim - Wheat Haze, White Trim Ring
	5"	3-3/8"	<b>47LSQ WWH</b>	4" Square Adjustable Angle Cut Reflector Trim - White, White Trim Ring
	5"	3-3/8"	<b>42LSQ BBL</b>	4" Square Downlight Reflector Trim - Black, Black Trim Ring
	5"	3-3/8"	<b>42LSQ BWH</b>	4" Square Downlight Reflector Trim - Black, White Trim Ring
	5"	3-3/8"	<b>42LSQ HZWH</b>	4" Square Downlight Reflector Trim - Haze, White Trim Ring
	5"	3-3/8"	<b>42LSQ WHZWH</b>	4" Square Downlight Reflector Trim - Wheat Haze, White Trim Ring
	5"	3-3/8"	<b>42LSQ WWH</b>	4" Square Downlight Reflector Trim - White, White Trim Ring
	5"	3-3/8"	<b>41LSQ WH</b>	4" Square Adjustable Lens Shower Trim - White Trim Ring

#### SLOPE CEILING TRIMS

Trim Series	Dimensions	Aperture	Catalog No.	Notes
			<b>Standard Slope 9° to 24°</b>	
	5"	3-3/8"	<b>46L BWH</b>	4" Angle Cut Cone - Standard Slope 9° to 24° - Black Alzak® Cone, White Trim Ring
	5"	3-3/8"	<b>46L CWH</b>	4" Angle Cut Cone - Standard Slope 9° to 24° - Clear Alzak® Cone, White Trim Ring
	5"	3-3/8"	<b>46L HZWH</b>	4" Angle Cut Cone - Standard Slope 9° to 24° - Haze Cone, White Trim Ring
	5"	3-3/8"	<b>46L PTSC</b>	4" Angle Cut Cone - Standard Slope 9° to 24° - Pewter Alzak® Cone, Satin Chrome Trim Ring
	5"	3-3/8"	<b>46L WHZBRZ</b>	4" Angle Cut Cone - Standard Slope 9° to 24° - Wheat Haze Cone, Bronze Trim Ring
	5"	3-3/8"	<b>46L WHZWH</b>	4" Angle Cut Cone - Standard Slope 9° to 24° - Wheat Haze Cone, White Trim Ring
			<b>Super Slope 20° to 35°</b>	
	5"	3-3/8"	<b>48L BWH</b>	4" Angle Cut Cone - Super Slope 20° to 35° - Black Alzak® Cone, White Trim Ring
	5"	3-3/8"	<b>48L CWH</b>	4" Angle Cut Cone - Super Slope 20° to 35° - Clear Alzak® Cone, White Trim Ring
	5"	3-3/8"	<b>48L HZWH</b>	4" Angle Cut Cone - Super Slope 20° to 35° - Haze Cone, White Trim Ring
	5"	3-3/8"	<b>48L PTSC</b>	4" Angle Cut Cone - Super Slope 20° to 35° - Pewter Alzak® Cone, Satin Chrome Trim Ring
	5"	3-3/8"	<b>48L WHZBRZ</b>	4" Angle Cut Cone - Super Slope 20° to 35° - Wheat Haze Cone, Bronze Trim Ring
	5"	3-3/8"	<b>48L WHZWH</b>	4" Angle Cut Cone - Super Slope 20° to 35° - Wheat Haze Cone, White Trim Ring
	5"	3-3/8"	<b>48L WWH</b>	4" Angle Cut Cone - Super Slope 20° to 35° - Gloss White Cone, White Trim Ring



# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### Specifications

#### LED Light Engine

LED array attached to cast aluminum sliding heatsink integrated directly with housing provides superior heat transfer to ensure long life of the LED

- Replaceable light engine mounts directly to inner housing assembly and incorporates the latest generation, high lumen output LED array
- LEDs are binned within a 3-step MacAdam Ellipse exceeding ENERGY STAR® requirements for superior fixture to fixture color uniformity
- 2700K, 3000K, 3500K, or 4000K color temperatures available
- 90 CRI minimum.

#### Optical System

Three field interchangeable, TIR optics available in 18°, 30° and 40° beam angles

- Module can accommodate one 2-inch diameter beam control lens or filter.

#### LED Driver

LED Driver Choice of dedicated 120 volt (120) driver or universal voltage (MVOLT) driver that accommodates input voltages from 120-277 volts AC at 50/60Hz

- Power factor > 0.9 at 120V input
- 120 volt only driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers
- Universal voltage drivers are dimmable with the use of most 0-10V wall box dimmers
- For a list of compatible dimmers, see [JUNOICLED-DIM](#)
- Easily accessible from below the ceiling via patent pending integrated intumescent flaps.

#### Certifications

ENERGY STAR® Certified when used with select trims

- Certified to the high efficacy requirements of California T24 JA8-2016 with select trims
- UL listed for U.S. and Canada through-branch wiring, damp locations
- Lensed trims listed for wet location (covered ceiling)
- UL and cUL
- Conforms to UL 263, ASTM STD E119 and CAN/ULC-S101
- May be used in fire resistance floor-ceiling and roof-ceiling designs per UL Fire Classified Directories CDHW and CDHW7
- ASTM E283 certified Air-Loc

#### Life

LED housing is designed to provide 50,000 hours of life

- 5 year limited warranty on LED components.

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

#### Housing

Designed for use in IC (insulated ceiling) or non-IC construction

- Powder coated steel housing sealed for Air-Loc® compliance
- Integrated patent pending continuous single layer low smoke intumescent barrier ships assembled in housing for fire resistance
- Housing is vertically adjustable to accommodate up to a 1 1/2" ceiling thickness

#### Junction Box

Pre-wired junction box provided with (6) 1/2" and (1) 3/4" knockouts, (4) knockouts for 12/2 or 14/2 NM cable and ground wire

- UL listed and cUL listed for through-branch wiring, maximum of 6 #12 branch circuit conductors
- Junction box provided with removable access plates
- Knock-outs equipped with pryout slots
- Quick connect electrical connectors supplied as standard for fast, secure installation.

#### Mounting Frame

22-gauge die-formed galvanized steel mounting frame

- Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation
- Pre-installed flame resistant Air-Loc gasket applied to frame

#### Real Nail 3 Bar Hangers

Patented (US Patent D552,969) Real Nail® 3 bar hangers: telescoping system permits quick placement of housing any where within 24" O.C. joists

- Includes removable nail for repositioning of fixture in wood joist construction

### ELECTRICAL DATA

#### Dedicated 120V Only Driver Option (120 FRPC)

	700L	1000L
	120V	120V
Input Power	10.5W (+/-5%)	16.4W (+/-5%)
Input Current	0.10A	0.15A
Frequency	50/60 Hz	50/60 Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (Residential)	FCC Title 47 CFR, Part 15, Class B (Residential)
Minimum Starting Temp	-25°C (-13°F)	-25°C (-13°F)

### ELECTRICAL DATA

#### Universal Voltage (MVOLT ZT, EZ10 & EZ1)

	700L		1000L	
	120V	277V	120V	277V
Input Power	10.0W (+/-5%)	10.0W (+/-5%)	16.0W (+/-5%)	16.0W (+/-5%)
Input Current	0.09A	0.04A	0.15A	0.06A
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (Residential)	FCC Title 47 CFR, Part 15, Class B (Residential)	FCC Title 47 CFR, Part 15, Class B (Residential)	FCC Title 47 CFR, Part 15, Class B (Residential)
Minimum Starting Temp	-20°C (-4°F)	-20°C (-4°F)	-20°C (-4°F)	-20°C (-4°F)



# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### PHOTOMETRICS - 47L ANGLE CUT TRIM 1000L

#### PHOTOMETRIC REPORT

Test Report: PT09153001R

Catalog No: IC4ALFW 10LM 35K


90CRI SP 120 FRPC with 47L HZWH

and Spot Optic

Watts: 16.4

Lumens: 1077

Luminaire LPW: 66



#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	183	
5°	260	
10°	431	
15°	770	
20°	1320	
25°	2571	
30°	4811	
35°	6185	
40°	4549	
45°	2283	
50°	1123	
55°	656	
60°	225	
65°	54	
70°	20	
75°	7	
80°	1	
85°	0	
90°	0	

#### PHOTOMETRIC REPORT

Test Report: PT09152921R

Catalog No: IC4ALFW 10LM 35K


90CRI NFL 120 FRPC with 47L HZWH

and Narrow Flood Optic

Watts: 16.4

Lumens: 1091

Luminaire LPW: 67



#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	177	
5°	268	
10°	400	
15°	756	
20°	1621	
25°	2700	
30°	3352	
35°	3554	
40°	3280	
45°	2600	
50°	1618	
55°	794	
60°	308	
65°	94	
70°	44	
75°	14	
80°	1	
85°	0	
90°	0	

#### PHOTOMETRIC REPORT

Test Report: PT09152901R

Catalog No: IC4ALFW 10LM 35K


90CRI FL 120 FRPC with 47L HZWH

and Flood Optic

Watts: 16.4

Lumens: 1126

Luminaire LPW: 69









#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	220	
5°	395	
10°	698	
15°	1120	
20°	1661	
25°	2171	
30°	2504	
35°	2591	
40°	2413	
45°	2023	
50°	1489	
55°	972	
60°	465	
65°	220	
70°	87	
75°	78	
80°	0	
85°	0	
90°	0	

**CBCP** • Centerbeam candlepower  
**FC** • Footcandles at beam center (aim point)

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°).



Fixture	Beam Type	Beam Spread°	CBCP	0°				30°			30°				
				MH	FC	L	W	FC	L	W	D	FC	X	L	W
IC4ALFW (10LM) LED, 3500K Spot	SP	18° 	6185	4	387	1.3	1.3	251	1.7	1.5	2	193	3.5	2.7	1.3
				6	172	1.9	1.9	112	2.6	2.2	3	86	5.2	4.1	1.9
				8	97	2.5	2.5	63	3.4	2.9	4	48	6.9	5.5	2.5
				10	62	3.2	3.2	40	4.3	3.7	5	31	8.7	6.9	3.2
				12	43	3.8	3.8	28	5.1	4.4	6	21	10.4	8.2	3.8
IC4ALFW (10LM) LED, 3500K Narrow Flood	NFL	30° 	3554	4	222	2.1	2.1	144	2.9	2.5	2	111	3.5	5.5	2.1
				6	99	3.2	3.2	64	4.4	3.7	3	49	5.2	8.2	3.2
				8	56	4.3	4.3	36	5.9	5.0	4	28	6.9	10.9	4.3
				10	36	5.4	5.4	23	7.3	6.2	5	18	8.7	13.7	5.4
				12	25	6.4	6.4	16	8.8	7.4	6	12	10.4	16.4	6.4
IC4ALFW (10LM) LED, 3500K Flood	FL	40° 	2591	4	162	2.9	2.9	105	4.1	3.4	2	81	3.5	9.7	2.9
				6	72	4.4	4.4	47	6.1	5.0	3	36	5.2	14.5	4.4
				8	40	5.8	5.8	26	8.1	6.7	4	20	6.9	19.3	5.8
				10	26	7.3	7.3	17	10.2	8.4	5	13	8.7	24.2	7.3
				12	18	8.7	8.7	12	12.2	10.1	6	9	10.4	29.0	8.7

Multipliers: 27K - 0.93  
 30K - 0.96  
 35K - 1.00  
 40K - 1.03



# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### PHOTOMETRICS - 47L ANGLE CUT TRIM 700L

#### PHOTOMETRIC REPORT

Test Report: PT09153001R

Catalog No: IC4ALFW 07LM 35K


90CRI SP 120 FRPC with 47L HZWH

and Spot Optic

Watts: 10.5

Lumens: 799

Luminaire LPW: 76



#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	135	
5°	193	
10°	320	
15°	571	
20°	979	
25°	1908	
30°	3570	
35°	4589	
40°	3376	
45°	1694	
50°	833	
55°	486	
60°	167	
65°	40	
70°	15	
75°	5	
80°	0	
85°	0	
90°	0	

#### PHOTOMETRIC REPORT

Test Report: PT09152921R

Catalog No: IC4ALFW 07LM 35K


90CRI NFL 120 FRPC with 47L HZWH

and Narrow Flood Optic

Watts: 10.5

Lumens: 809

Luminaire LPW: 77



#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	131	
5°	199	
10°	297	
15°	561	
20°	1203	
25°	2004	
30°	2488	
35°	2637	
40°	2434	
45°	2225	
50°	1201	
55°	589	
60°	228	
65°	70	
70°	33	
75°	11	
80°	1	
85°	0	
90°	0	

#### PHOTOMETRIC REPORT

Test Report: PT09152901R

Catalog No: IC4ALFW 07LM 35K


90CRI FL 120 FRPC with 47L HZWH

and Flood Optic

Watts: 10.5

Lumens: 835

Luminaire LPW: 80







#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	164	
5°	293	
10°	518	
15°	831	
20°	1232	
25°	1611	
30°	1858	
35°	1923	
40°	1790	
45°	1501	
50°	1105	
55°	721	
60°	345	
65°	164	
70°	65	
75°	19	
80°	0	
85°	0	
90°	0	

**CBCP** • Centerbeam candlepower  
**FC** • Footcandles at beam center (aim point)

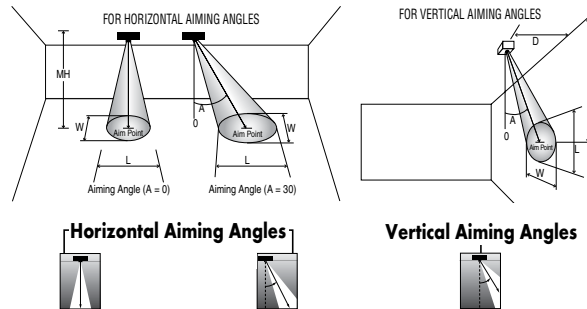In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°).



FIXTURE	Beam Type	Beam Spread°	CBCP	0°				30°			30°				
				MH	FC	L	W	FC	L	W	D	FC	X	L	W
IC4ALFW (07LM) LED, 3500K Spot	SP	18° 	4589	4	287	1.3	1.3	186	1.7	1.5	2	143	3.5	2.7	1.3
				6	127	1.9	1.9	83	2.6	2.2	3	64	5.2	4.1	1.9
				8	72	2.5	2.5	47	3.4	2.9	4	36	6.9	5.5	2.5
				10	46	3.2	3.2	30	4.3	3.7	5	23	8.7	6.9	3.2
				12	32	3.8	3.8	21	5.1	4.4	6	16	10.4	8.2	3.8
IC4ALFW (07LM) LED, 3500K Narrow Flood	NFL	30° 	2637	4	165	2.1	2.1	107	2.9	2.5	2	82	3.5	5.5	2.1
				6	73	3.2	3.2	48	4.4	3.7	3	37	5.2	8.2	3.2
				8	41	4.3	4.3	27	5.9	5.0	4	21	6.9	10.9	4.3
				10	26	5.4	5.4	17	7.3	6.2	5	13	8.7	13.7	5.4
				12	18	6.4	6.4	12	8.8	7.4	6	9	10.4	16.4	6.4
IC4ALFW (07LM) LED, 3500K Flood	FL	40° 	1923	4	120	2.9	2.9	78	4.1	3.4	2	60	3.5	9.7	2.9
				6	53	4.4	4.4	35	6.1	5.0	3	27	5.2	14.5	4.4
				8	30	5.8	5.8	20	8.1	6.7	4	15	6.9	19.3	5.8
				10	19	7.3	7.3	12	10.2	8.4	5	10	8.7	24.2	7.3
				12	13	8.7	8.7	9	12.2	10.1	6	7	10.4	29.0	8.7

Multipliers: 27K - 0.93  
30K - 0.96  
35K - 1.00  
40K - 1.03





# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### PHOTOMETRICS - 42L DOWNLIGHT TRIM 1000L

#### PHOTOMETRIC REPORT


Test Report#: PT09152801R

Catalog No: IC4ALFW 10LM 35K 90CRI 35K

SP 120 FRPC with 42L HZWH, Downlight Cone Haze Finish Trim and Spot Optic

Luminaire Spacing Criteria: 0.30

Luminaire LPW: 64



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	6349
5	4828
15	1260
25	420
35	105
45	14
55	0
65	0
75	0
85	0
90	0

Multipliers:  
27K - 0.93 35K - 1.00  
30K - 0.96 40K - 1.03

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	74	67	61
5.0'	47	43	39
6.0'	33	30	27
7.0'	27	24	22
8.0'	21	19	17
9.0'	16	15	13
10.0'	12	11	10

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	956	N/A	91.3
0-40°	1031	N/A	98.5
0-60°	1046	N/A	100.0
0-90°	1046	N/A	100.0

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 16.9° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	396.8	1.2
6	176.4	1.8
8	99.2	2.4
10	63.5	3.0

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	3709
55	105
65	0
75	0
85	0

#### PHOTOMETRIC REPORT


Test Report#: PT09152803R

Catalog No: IC4ALFW 10LM 35K 90CRI 35K

NFL 120 FRPC with 42L HZWH, Downlight Cone Haze Finish Trim and Narrow Flood Optic

Luminaire Spacing Criteria: 0.46

Luminaire LPW: 62



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	3598
5	3318
15	1497
25	423
35	115
45	25
55	1
65	0
75	0
85	0
90	0

Multipliers:  
27K - 0.93 35K - 1.00  
30K - 0.96 40K - 1.03

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	71	64	59
5.0'	46	41	38
6.0'	32	29	26
7.0'	26	23	21
8.0'	20	18	17
9.0'	15	14	13
10.0'	11	10	9

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	910	N/A	89.5
0-40°	993	N/A	97.7
0-60°	1016	N/A	100.0
0-90°	1016	N/A	100.0

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 27.0° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	224.9	1.9
6	99.9	2.9
8	56.2	3.8
10	36.0	4.8

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	6597
55	244
65	0
75	0
85	0

#### PHOTOMETRIC REPORT


Test Report#: PT09152805R

Catalog No: IC4ALFW 10LM 35K 90CRI

35K FL 120 FRPC with 42L HZWH, Downlight Cone Haze Finish Trim and Flood Optic

Luminaire Spacing Criteria: 0.58

Luminaire LPW: 68



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	2676
5	2552
15	1626
25	659
35	157
45	30
55	0
65	0
75	0
85	0
90	0

Multipliers:  
27K - 0.93 35K - 1.00  
30K - 0.96 40K - 1.03

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	78	70	63
5.0'	50	45	40
6.0'	35	31	28
7.0'	28	25	23
8.0'	22	20	18
9.0'	17	15	14
10.0'	13	11	10

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	980	N/A	87.5
0-40°	1091	N/A	97.4
0-60°	1120	N/A	100.0
0-90°	1120	N/A	100.0

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 35.0° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	167.3	2.5
6	74.3	3.8
8	41.8	5.0
10	26.8	6.3

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	8041
55	35
65	0
75	0
85	0

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.





# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### PHOTOMETRICS - 45L SLOT ADJUSTABLE TRIM 1000L

#### PHOTOMETRIC REPORT

Test Report: PT09153005R

Catalog No: IC4ALFW 10LM 35K


90CRI SP 120 FRPC with 45L WH and

Spot Optic

Watts: 16.4

Lumens: 854

Luminaire LPW: 52



#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	59	
5°	79	
10°	183	
15°	538	
20°	1120	
25°	2234	
30°	4258	
35°	5802	
40°	4534	
45°	2326	
50°	1124	
55°	648	
60°	143	
65°	48	
70°	19	
75°	7	
80°	1	
85°	0	
90°	0	

#### PHOTOMETRIC REPORT

Test Report: PT09152925R

Catalog No: IC4ALFW 10LM 35K


90CRI NFL 120 FRPC with 45L WH and

Narrow Flood Optic

Watts: 16.4

Lumens: 873

Luminaire LPW: 53



#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	69	
5°	96	
10°	143	
15°	479	
20°	1438	
25°	2519	
30°	3158	
35°	3365	
40°	3135	
45°	2501	
50°	1567	
55°	746	
60°	215	
65°	87	
70°	39	
75°	13	
80°	1	
85°	0	
90°	0	

#### PHOTOMETRIC REPORT

Test Report: PT09152905R

Catalog No: IC4ALFW 10LM 35K


90CRI FL 120 FRPC with 45L WH and

Flood Optic

Watts: 16.4

Lumens: 955

Luminaire LPW: 58






#### Candlepower Distribution (Candelas)




Degrees	Vertical	Candela
0°	131	
5°	254	
10°	490	
15°	929	
20°	1509	
25°	2020	
30°	2368	
35°	2465	
40°	2308	
45°	1946	
50°	1440	
55°	901	
60°	416	
65°	210	
70°	83	
75°	21	
80°	0	
85°	0	
90°	0	

CBCP • Centerbeam candlepower

FC • Footcandles at beam center (aim point)

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°).



FIXTURE	Beam Type	Beam Spread°	CBCP	0°				30°			30°				
				MH	FC	L	W	FC	L	W	D	FC	X	L	W
IC4ALFW(10LM) LED, 3500K Spot	SP	18° 	5802	4	363	1.3	1.3	236	1.7	1.5	2	181	3.5	2.7	1.3
				6	161	1.9	1.9	105	2.6	2.2	3	81	5.2	4.1	1.9
				8	91	2.5	2.5	59	3.4	2.9	4	45	6.9	5.5	2.5
				10	58	3.2	3.2	38	4.3	3.7	5	29	8.7	6.9	3.2
				12	40	3.8	3.8	26	5.1	4.4	6	20	10.4	8.2	3.8
IC4ALFW (10LM) LED, 3500K Narrow Flood	NFL	30° 	3365	4	210	2.1	2.1	137	2.9	2.5	2	105	3.5	5.5	2.1
				6	93	3.2	3.2	61	4.4	3.7	3	47	5.2	8.2	3.2
				8	53	4.3	4.3	34	5.9	5.0	4	26	6.9	10.9	4.3
				10	34	5.4	5.4	22	7.3	6.2	5	17	8.7	13.7	5.4
				12	23	6.4	6.4	15	8.8	7.4	6	12	10.4	16.4	6.4
IC4ALFW (10LM) LED, 3500K Flood	FL	40° 	2465	4	154	2.9	2.9	100	4.1	3.4	2	77	3.5	9.7	2.9
				6	68	4.4	4.4	44	6.1	5.0	3	34	5.2	14.5	4.4
				8	39	5.8	5.8	25	8.1	6.7	4	19	6.9	19.3	5.8
				10	25	7.3	7.3	16	10.2	8.4	5	12	8.7	24.2	7.3
				12	17	8.7	8.7	11	12.2	10.1	6	9	10.4	29.0	8.7

Multipliers: 27K - 0.93

30K - 0.96

35K - 1.00

40K - 1.03



# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### PHOTOMETRICS - 41L LENSED TRIM 1000L

#### PHOTOMETRIC REPORT

Test Report: PT09153003R

Catalog No: IC4ALFW 10LM 35K


90CRI SP 120 FRPC with 41L WH and

Spot Optic

Watts: 16.4

Lumens: 848

Luminaire LPW: 52



#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	142	
5°	191	
10°	271	
15°	452	
20°	828	
25°	1735	
30°	3387	
35°	4633	
40°	3756	
45°	2039	
50°	903	
55°	318	
60°	150	
65°	84	
70°	54	
75°	32	
80°	15	
85°	4	
90°	0	

#### PHOTOMETRIC REPORT

Test Report: PT09152923R

Catalog No: IC4ALFW 10LM 35K


90CRI NFL 120 FRPC with 41L WH and

Narrow Flood Optic

Watts: 16.4

Lumens: 867

Luminaire LPW: 53



#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	135	
5°	183	
10°	233	
15°	468	
20°	1208	
25°	2208	
30°	2836	
35°	3030	
40°	2782	
45°	2169	
50°	1288	
55°	408	
60°	149	
65°	93	
70°	53	
75°	27	
80°	12	
85°	3	
90°	0	

#### PHOTOMETRIC REPORT

Test Report: PT090152903R

Catalog No: IC4ALFW 10LM 35K


90CRI FL 120 FRPC with 41L WH and

Flood Optic

Watts: 16.4

Lumens: 936

Luminaire LPW: 57







#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	139	
5°	254	
10°	487	
15°	826	
20°	1280	
25°	1782	
30°	2142	
35°	2305	
40°	2226	
45°	1716	
50°	1107	
55°	619	
60°	405	
65°	224	
70°	95	
75°	28	
80°	10	
85°	1	
90°	0	

**CBCP** • Centerbeam candlepower  
**FC** • Footcandles at beam center (aim point)

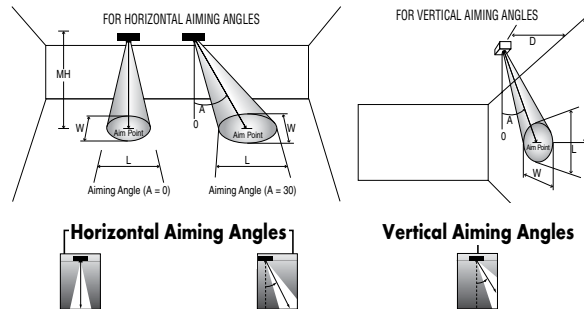In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°).



Beam Type Beam Spread° CBCP				0°				30°				30°			
				MH	FC	L	W	FC	L	W	D	FC	X	L	W
IC4ALFW (10LM) LED, 3500K Spot	SP	18° 	4633	4	290	1.3	1.3	188	1.7	1.5	2	145	3.5	2.7	1.3
				6	129	1.9	1.9	84	2.6	2.2	3	64	5.2	4.1	1.9
				8	72	2.5	2.5	47	3.4	2.9	4	36	6.9	5.5	2.5
				10	46	3.2	3.2	30	4.3	3.7	5	23	8.7	6.9	3.2
				12	32	3.8	3.8	21	5.1	4.4	6	16	10.4	8.2	3.8
IC4ALFW (10LM) LED, 3500K Narrow Flood	NFL	30° 	3030	4	189	2.1	2.1	123	2.9	2.5	2	95	3.5	5.5	2.1
				6	84	3.2	3.2	55	4.4	3.7	3	42	5.2	8.2	3.2
				8	47	4.3	4.3	31	5.9	5.0	4	24	6.9	10.9	4.3
				10	30	5.4	5.4	20	7.3	6.2	5	15	8.7	13.7	5.4
				12	21	6.4	6.4	14	8.8	7.4	6	11	10.4	16.4	6.4
IC4ALFW (10LM) LED, 3500K Flood	FL	40° 	2305	4	144	2.9	2.9	94	4.1	3.4	2	72	3.5	9.7	2.9
				6	64	4.4	4.4	42	6.1	5.0	3	32	5.2	14.5	4.4
				8	36	5.8	5.8	23	8.1	6.7	4	18	6.9	19.3	5.8
				10	23	7.3	7.3	15	10.2	8.4	5	12	8.7	24.2	7.3
				12	16	8.7	8.7	10	12.2	10.1	6	8	10.4	29.0	8.7

Multipliers: 27K - 0.93  
30K - 0.96  
35K - 1.00  
40K - 1.03



# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction


### PHOTOMETRICS - 39 WALL WASH TRIM 1000L

#### PHOTOMETRIC REPORT

Test Report #: PT02162902R  
Catalog No: IC4ALFW 10LM 35K 90CRI  
NFL 120 FRPC with 39 HZWH Trim

Luminaire Spacing Criterion: 0.64

Luminaire LPW: 42



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	900
5	871
15	606
25	322
35	157
45	72
55	35
65	18
75	6
85	0
90	0

Multipliers: 27K - 0.93  
30K - 0.96  
35K - 1.00  
40K - 1.03

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	443	N/A	64.7
0-40°	571	N/A	83.5
0-60°	671	N/A	98.1
0-90°	684	N/A	100.0

#### LUMINANCE (Average cd/m²)

Degrees	Average Luminance
45	19022
55	11545
65	7879
75	4337
85	0

### FOOTCANDLES ON WALL FROM MULTIPLE FIXTURES

Fixture Distance to Wall		2'			3'		
Fixture Centers (spacing)		2'	2'	2'	3'	3'	3'
DISTANCE FROM CEILING	1'	4	4	4	4	3	4
	2'	11	11	11	8	7	8
	3'	15	15	15	11	10	11
	4'	17	17	17	12	12	12
	5'	16	16	16	12	12	12
	6'	15	15	15	11	11	11
	7'	13	13	13	10	10	10
	8'	12	12	12	9	9	9
	9'	10	10	10	7	7	7
		2'			3'		
		2'	2'	2'	3'	3'	3'
		2	2	2	2	2	2
		4	4	4	4	3	4
		6	6	6	5	5	5
		8	8	8	6	6	6
		9	9	9	7	7	7
		9	9	9	7	7	7
		7	7	7	7	7	7
		9	9	9	7	7	7
		8	8	8	6	6	6

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.



# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### PHOTOMETRICS - 42LSQ SQUARE DOWNLIGHT TRIM 1000L

#### PHOTOMETRIC REPORT

Test Report#: PT09152802R


Catalog No: IC4ALFW 10LM 35K 90CRI SP

120 FRPC with 42LSQ HZWH, Downlight Cone

Haze Finish Square Trim and Spot Optic

Luminaire Spacing Criteria: 0.30

Luminaire LPW: 56



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	5982
5	4561
15	1241
25	221
35	31
45	4
55	0
65	0
75	0
85	0
90	0

Multipliers:

27K - 0.93 35K - 1.00

30K - 0.96 40K - 1.03

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	64	59	55
5.0'	41	38	35
6.0'	29	26	24
7.0'	23	21	20
8.0'	18	17	16
9.0'	14	13	12
10.0'	10	9	9

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	875	N/A	96.0
0-40°	905	N/A	99.4
0-60°	911	N/A	100.0
0-90°	911	N/A	100.0

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 17.0° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	373.9	1.2
6	166.2	1.8
8	93.5	2.4
10	59.8	3.0

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	850
55	0
65	0
75	0
85	0

#### PHOTOMETRIC REPORT

Test Report#: PT09152804R


Catalog No: IC4ALFW 10LM 35K 90CRI NFL

120 FRPC with 42LSQ HZWH, Downlight Cone

Haze Finish Square Trim and Narrow Flood Optic

Luminaire Spacing Criteria: 0.48

Luminaire LPW: 53



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	3292
5	3101
15	1467
25	213
35	58
45	6
55	0
65	0
75	0
85	0
90	0

Multipliers:

27K - 0.93 35K - 1.00

30K - 0.96 40K - 1.03

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	61	56	51
5.0'	39	36	33
6.0'	27	25	23
7.0'	22	20	19
8.0'	17	16	15
9.0'	13	12	11
10.0'	10	9	8

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	813	N/A	93.8
0-40°	858	N/A	98.9
0-60°	867	N/A	100.0
0-90°	867	N/A	100.0

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 27.7° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	205.8	2.0
6	91.4	3.0
8	51.4	3.9
10	32.9	4.9

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	1264
55	0
65	0
75	0
85	0

#### PHOTOMETRIC REPORT

Test Report#: PT09152806R


Catalog No: IC4ALFW 10LM 35K 90CRI FL

120 FRPC with 42LSQ HZWH, Downlight Cone

Haze Finish Square Trim and Flood Optic

Luminaire Spacing Criteria: 0.60

Luminaire LPW: 61



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	2505
5	2408
15	1597
25	498
35	106
45	9
55	0
65	0
75	0
85	0
90	0

Multipliers:

27K - 0.93 35K - 1.00

30K - 0.96 40K - 1.03

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	70	63	57
5.0'	45	40	36
6.0'	31	28	25
7.0'	25	23	20
8.0'	20	18	16
9.0'	15	14	12
10.0'	11	10	9

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	906	N/A	90.6
0-40°	986	N/A	98.6
0-60°	1000	N/A	100.0
0-90°	1000	N/A	100.0

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 34.7° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	156.6	2.5
6	69.6	3.7
8	39.1	5.0
10	25.1	6.2

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	1853
55	0
65	0
75	0
85	0

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.




# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### PHOTOMETRICS - 47LSQ SQUARE ANGLE CUT TRIM 1000L

#### PHOTOMETRIC REPORT

Test Report: PT09153002R  
Catalog No: IC4ALFW 10LM 35K  
90CRI SP 120 FRPC with 47LSQ HZWH  
and Spot Optic  
Watts: 16.4  
Lumens: 983  
Luminaire LPW: 60




#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	85	
5°	164	
10°	365	
15°	709	
20°	1229	
25°	2351	
30°	4494	
35°	6059	
40°	4676	
45°	2416	
50°	1133	
55°	370	
60°	96	
65°	32	
70°	14	
75°	4	
80°	0	
85°	0	
90°	0	

#### PHOTOMETRIC REPORT

Test Report: PT09152922R  
Catalog No: IC4ALFW 10LM 35K  
90CRI NFL 120 FRPC with 47LSQ  
HZWH and Narrow Flood Optic  
Watts: 16.4  
Lumens: 990  
Luminaire LPW: 60




#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	85	
5°	145	
10°	280	
15°	655	
20°	1510	
25°	2571	
30°	3241	
35°	3465	
40°	3231	
45°	2596	
50°	1642	
55°	604	
60°	143	
65°	73	
70°	32	
75°	8	
80°	0	
85°	0	
90°	0	

#### PHOTOMETRIC REPORT

Test Report: PT09152902R  
Catalog No: IC4ALFW 10LM 35K  
90CRI FL 120 FRPC with 47LSQ HZWH  
and Flood Optic  
Watts: 16.4  
Lumens: 1050  
Luminaire LPW: 64







#### Candlepower Distribution (Candelas)

Degrees	Vertical	Candela
0°	159	
5°	321	
10°	628	
15°	1072	
20°	1621	
25°	2129	
30°	2452	
35°	2537	
40°	2356	
45°	1970	
50°	1406	
55°	729	
60°	378	
65°	188	
70°	72	
75°	12	
80°	0	
85°	0	
90°	0	

**CBCP** • Centerbeam candlepower  
**FC** • Footcandles at beam center (aim point)

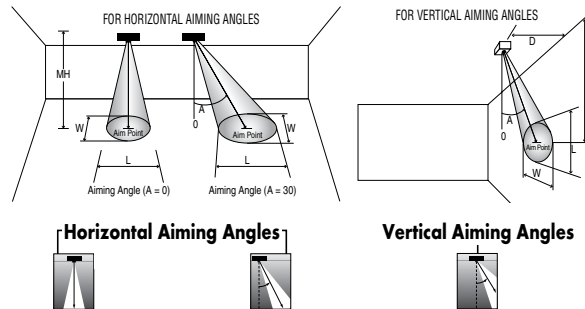In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°).



FIXTURE	Beam Type	Beam Spread°	CBCP	0°				30°			30°				
				MH	FC	L	W	FC	L	W	D	FC	X	L	W
IC4ALFW (10LM) LED, 3500K Spot	SP	18° 	6059	4	379	1.3	1.3	246	1.7	1.5	2	189	3.5	2.7	1.3
				6	168	1.9	1.9	109	2.6	2.2	3	84	5.2	4.1	1.9
				8	95	2.5	2.5	61	3.4	2.9	4	47	6.9	5.5	2.5
				10	61	3.2	3.2	39	4.3	3.7	5	30	8.7	6.9	3.2
				12	42	3.8	3.8	27	5.1	4.4	6	21	10.4	8.2	3.8
IC4ALFW (10LM) LED, 3500K Narrow Flood	NFL	30° 	3465	4	217	2.1	2.1	141	2.9	2.5	2	108	3.5	5.5	2.1
				6	96	3.2	3.2	63	4.4	3.7	3	48	5.2	8.2	3.2
				8	54	4.3	4.3	35	5.9	5.0	4	27	6.9	10.9	4.3
				10	35	5.4	5.4	23	7.3	6.2	5	17	8.7	13.7	5.4
				12	24	6.4	6.4	16	8.8	7.4	6	12	10.4	16.4	6.4
IC4ALFW (10LM) LED, 3500K Flood	FL	40° 	2537	4	159	2.9	2.9	103	4.1	3.4	2	79	3.5	9.7	2.9
				6	70	4.4	4.4	46	6.1	5.0	3	35	5.2	14.5	4.4
				8	40	5.8	5.8	26	8.1	6.7	4	20	6.9	19.3	5.8
				10	25	7.3	7.3	16	10.2	8.4	5	13	8.7	24.2	7.3
				12	18	8.7	8.7	11	12.2	10.1	6	9	10.4	29.0	8.7

Multipliers: 27K - 0.93  
30K - 0.96  
35K - 1.00  
40K - 1.03



# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### PHOTOMETRICS - 46L SLOPE TRIM 1000L

#### PHOTOMETRIC REPORT

Test Report#: PTO21162301R


Catalog No: IC4ALFW 10LM 35K 90CRI SP

120 FRPC with 46L HZWH, Standard Slope

Haze Finish Trim and Spot Optic

Luminaire Spacing Criteria: 1.40

Luminaire LPW: 62



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	954
5	1727
10	3497
15	5527
20	5305
25	3206
30	1542
35	841
40	469
45	274
50	160
55	49
60	22
65	7
70	2
75	0
80	0
85	0
90	0

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	71	62	54
5.0'	45	40	35
6.0'	32	28	24
7.0'	26	22	20
8.0'	20	18	15
9.0'	15	14	12
10.0'	11	10	9

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	785	N/A	76.7
0-40°	940	N/A	91.9
0-60°	1021	N/A	99.8
0-90°	1024	N/A	100.0

For 2700K fixtures, use 0.93 multiplier; for 3000K fixtures, use 0.96 multiplier; for 3500K fixtures, use 1.00 multiplier; for 4000K fixtures, use 1.03 multiplier.

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 17.6° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	361.1	1.2
6	160.5	1.9
8	90.3	2.5
10	57.8	3.1

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	72671
55	15912
65	3168
75	73
85	0

#### PHOTOMETRIC REPORT

Test Report#: PTO21162302R


Catalog No: IC4ALFW 10LM 35K 90CRI NFL

120 FRPC with 46L HZWH, Standard Slope Haze

Finish Trim and Narrow Flood Optic

Luminaire Spacing Criteria: 1.50

Luminaire LPW: 65



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	1025
5	1988
10	2909
15	3353
20	3384
25	3004
30	2196
35	1231
40	583
45	328
50	212
55	65
60	36
65	10
70	3
75	0
80	0
85	0
90	0

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	73	64	56
5.0'	47	41	36
6.0'	33	28	25
7.0'	26	23	20
8.0'	21	18	16
9.0'	16	14	12
10.0'	12	10	9

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	773	N/A	73.0
0-40°	962	N/A	90.8
0-60°	1056	N/A	99.7
0-90°	1059	N/A	100.0

For 2700K fixtures, use 0.93 multiplier; for 3000K fixtures, use 0.96 multiplier; for 3500K fixtures, use 1.00 multiplier; for 4000K fixtures, use 1.03 multiplier.

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 28.9° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	213.7	2.1
6	95.0	3.1
8	53.4	4.1
10	34.2	5.2

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	87125
55	21173
65	4373
75	73
85	0

#### PHOTOMETRIC REPORT

Test Report#: PTO21162302R


Catalog No: IC4ALFW 10LM 35K 90CRI FL

120 FRPC with 46L HZWH, Standard Slope

Haze Finish Trim and Flood Optic

Luminaire Spacing Criteria: 1.42

Luminaire LPW: 66



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	1310
5	1784
10	2160
15	2377
20	2357
25	2137
30	1742
35	1203
40	735
45	381
50	170
55	69
60	26
65	10
70	1
75	0
80	0
85	0
90	0

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	75	65	56
5.0'	48	41	36
6.0'	33	29	25
7.0'	27	23	20
8.0'	21	18	16
9.0'	16	14	12
10.0'	12	10	9

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	764	N/A	71.0
0-40°	976	N/A	90.8
0-60°	1073	N/A	99.8
0-90°	1075	N/A	100.0

For 2700K fixtures, use 0.93 multiplier; for 3000K fixtures, use 0.96 multiplier; for 3500K fixtures, use 1.00 multiplier; for 4000K fixtures, use 1.03 multiplier.

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 36.5° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	149.4	2.6
6	66.4	4.0
8	37.3	5.3
10	23.9	6.6

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	101233
55	22586
65	4328
75	73
85	0





# FIREWALL™ LED Downlight Series

## 4" Fire-Rated Internally Adjustable LED Downlight New Construction

### PHOTOMETRICS - 48L SUPER SLOPE TRIM 1000L

#### PHOTOMETRIC REPORT

Test Report#: PT02162303R


Catalog No: IC4ALFW 10LM 35K 90CRI SP

120 FRPC with 48L HZWH, Super Slope Haze

Finish Trim and Spot Optic

Luminaire Spacing Criteria: 2.28

Luminaire LPW: 62



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	334
5	530
10	897
15	1658
20	3399
25	5412
30	5233
35	3190
40	1562
45	877
50	494
55	268
60	93
65	44
70	11
75	4
80	0
85	0
90	0

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	69	58	49
5.0'	44	37	31
6.0'	31	26	22
7.0'	25	21	18
8.0'	20	16	14
9.0'	15	13	11
10.0'	11	9	8

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	526	N/A	51.7
0-40°	820	N/A	80.6
0-60°	1006	N/A	98.9
0-90°	1017	N/A	100.0

For 2700K fixtures, use 0.93 multiplier; for 3000K fixtures, use 0.96 multiplier;  
for 3500K fixtures, use 1.00 multiplier; for 4000K fixtures, use 1.03 multiplier.

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 18.0° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	355.7	1.3
6	158.1	1.9
8	88.9	2.5
10	56.9	3.2

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	233049
55	87636
65	19432
75	2819
85	216

#### PHOTOMETRIC REPORT

Test Report#: PT02162301R


Catalog No: IC4ALFW 10LM 35K 90CRI NFL

120 FRPC with 48L HZWH, Super Slope Haze

Finish Trim and Narrow Flood Optic

Luminaire Spacing Criteria: 2.32

Luminaire LPW: 65



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	342
5	564
10	1178
15	2195
20	3064
25	3441
30	3390
35	2939
40	2061
45	1105
50	534
55	307
60	99
65	50
70	14
75	4
80	0
85	0
90	0

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	73	61	51
5.0'	46	39	33
6.0'	32	27	23
7.0'	26	22	18
8.0'	21	17	15
9.0'	16	13	11
10.0'	12	10	8

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	529	N/A	49.7
0-40°	844	N/A	79.2
0-60°	1054	N/A	98.9
0-90°	1066	N/A	100.0

For 2700K fixtures, use 0.93 multiplier; for 3000K fixtures, use 0.96 multiplier;  
for 3500K fixtures, use 1.00 multiplier; for 4000K fixtures, use 1.03 multiplier.

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 28.9° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	216.8	2.1
6	96.3	3.1
8	54.2	4.1
10	34.7	5.2

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	293447
55	100453
65	22044
75	2747
85	216

#### PHOTOMETRIC REPORT

Test Report#: PT02162304R


Catalog No: IC4ALFW 10LM 35K 90CRI FL

120 FRPC with 48L HZWH, Super Slope Haze

Finish Trim and Flood Optic

Luminaire Spacing Criteria: 2.22

Luminaire LPW: 65



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	539
5	905
10	1366
15	1853
20	2208
25	2383
30	2347
35	2092
40	1671
45	1164
50	739
55	425
60	173
65	68
70	24
75	4
80	0
85	0
90	0

#### AVERAGE INITIAL FOOTCANDLES

Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Wall 50%, Floor 20%

Spacing	RCR1	RCR3	RCR5
4.0'	73	61	51
5.0'	46	39	32
6.0'	32	27	23
7.0'	26	22	18
8.0'	21	17	14
9.0'	16	13	11
10.0'	12	10	8

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	519	N/A	48.7
0-40°	806	N/A	75.6
0-60°	1051	N/A	98.6
0-90°	1066	N/A	100.0

For 2700K fixtures, use 0.93 multiplier; for 3000K fixtures, use 0.96 multiplier;  
for 3500K fixtures, use 1.00 multiplier; for 4000K fixtures, use 1.03 multiplier.

#### INITIAL FOOTCANDLES

(One Unit, 16.4W, 36.6° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4	149.3	2.6
6	66.4	4.0
8	37.3	5.3
10	23.9	6.6

#### LUMINANCE (Average cd/m²)

Degrees	Average 0° Luminance
45	309294
55	139069
65	30100
75	3180
85	0