



# TRAC-LITES™

## 37W LED CYLINDER

### R612L SERIES

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_



Buy American

## PRODUCT DESCRIPTION

The R612L Series 37W LED Cylinder is an efficient and affordable trac fixture, with a simple and timeless cylindrical aesthetic. It can deliver up to 3339 lumens, at efficacies up to 90LPW and having a rated life of 50,000 hours. Its unique, nested yoke arm enables simple, straight-down aiming if desired. Precision bayonet-mount reflectors enable uniform spot, narrow flood, flood or wide flood distributions to be achieved. These fixtures can also be fitted with a factory-assembled or field-installed accessory holder that accommodates one accessory if desired. The 37W LED Cylinder can be specified with a variety of factory-assembled track mounting adapters, making it compatible with all line voltage Juno Trac systems and system components, or with many competitive 120V track systems.



## PRODUCT SPECIFICATIONS

**Construction** Die cast aluminum housing provides outstanding thermal management of LED, yielding 70% average lumen maintenance at 50,000 hours of operation • Simple, timeless design complements any decor • Available in white, black and silver finishes.

**LED** High performance LED array provides outstanding reliability, performance and color quality/consistency • 2700K, 3000K, 3500K or 4000K white phosphor high performance LEDs • Chromaticity range within a 3-step MacAdam Ellipse • Exceptional 80 CRI minimum on standard product • Optional high CRI versions offer 90 CRI minimum.

**Driver** Integrated into fixture housing behind LED light engine to minimize overall fixture footprint • Insulating air gap between driver and LED light engine, plus thermal potting compound, optimizes thermal operation • Provides quiet operation with or without dimming • 120V fixtures are dimmable using high quality, factory-approved dimmers - see [R612L-DIM](#) • Solid state electronic, Class 2 compliant • Integral overcurrent and short circuit protection • Designed for greater than 50,000 hour operating life • FCC Certified to Part 15 Class B EMI standards (Class A at 277V).

**Reflector** Precision designed reflectors provide uniform spot, narrow flood, flood or wide flood beam distributions • Faceted/dimpled reflector ensures a properly color-mixed beam • Accessory reflectors available to convert from one beam distribution to another in the field.

**Accessory Holder** Optional accessory holder replaces front bezel without tools • May be specified as a factory-installed option or ordered separately as a field-installed accessory • Precision bayonet mounting • Accommodates one accessory if desired.

**Juno Universal Trac Adapter** Universally compatible with both Trac-Master 1-circuit or 2-circuit trac, Trac-Lites trac, monopoints and special mountings • Also UL Recognized for use on ConTech® LT Series track • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • On/off switch included • Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures trac light to trac • Two-position power contact provided for two-circuit application.

**Alternate TEK/HTEK Trac Adapters** Compatible with either Juno TEK or HTEK trac systems • System specific and assembled to trac fixture • Integrally polarized construction to prevent reverse installation – only allows insertion in proper orientation • Rotary circuit selector enables simple switching between circuits • Integral on/off switch enables individual fixtures to be switched for servicing.

**Alternate GTYPE Trac Adapter** Compatible with track systems based on GES type track, including Lithonia LT Commercial Track (not LTS type)

• System specific and assembled to trac fixture • Available in black, silver, and white finish only • Consult factory for additional information.

**Alternate HTYPE Trac Adapter** Compatible with track systems which use a H-type track adapter, including Lithonia LTS Decorative Track (not LT type) • System specific and assembled to trac fixture • Two-position power contact provided for two-circuit application • Available in black, silver, and white finish only • Consult factory for additional information.

**Alternate LTYPE Trac Adapter** Compatible with track systems which use a L-type track adapter • System specific and assembled to trac fixture

• Two-position power contact provided for two-circuit application • Available in black, silver, and white finish only • Consult factory for additional information.


**Aiming** 360° horizontal coverage • 95° vertical aiming capability.

**Labels** UL and C-UL Listed • ENERGY STAR® certified • 80CRI versions are DesignLights Consortium® Qualified • 90 CRI versions certified as CEC Title 24 Compliant • Union made • Assembled in U.S.A.

**Buy American** This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FARS, DFARS and DOT. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**Warranty** 5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx). Specifications subject to change without notice.

## DIMENSIONS

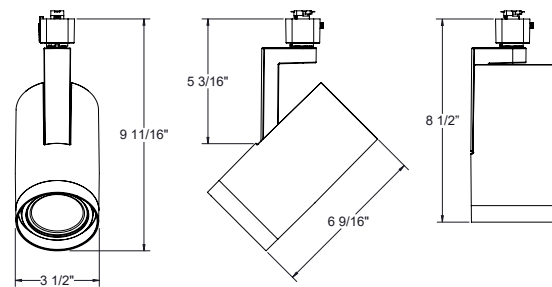

ConTech is a registered trademark of ConTech Lighting.



One Lithonia Way • Conyers, GA 30012 • Phone 1-800-705-SERV (7378) • Visit us at [www.acuitybrands.com](http://www.acuitybrands.com)  
Printed in U.S.A. ©2021 Acuity Brands Lighting, Inc. Rev. 03/23/21

# TRAC-LITES™

## 37W LED CYLINDER

### R612L SERIES

#### ORDERING INFORMATION

Ordering Examples: R612L 27K 80CRI PDIM SP BL, R612L HTYPE 30K 90CRI PDIM NFL WH AHR610 WHT

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility
<b>R612L</b> Trac-Lites™ 37W LED Cylinder	<b>(Blank)</b> Juno Universal 120V Trac Adapter <b>GTYPE</b> G-Type Trac Adapter <b>HTYPE</b> H-Type Trac Adapter <b>LTYPE</b> L-Type Trac Adapter <b>TEK<sup>1</sup></b> TEK 120V Trac Adapter <b>HTEK<sup>1,2</sup></b> HTEK 277V Trac Adapter	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>80CRI</b> 80 CRI <b>90CRI</b> 90 CRI	<b>OFF<sup>2</sup></b> On/Off (Non-Dimming) <b>PDIM</b> Phase Dimmable

Distribution	Finish	Accessory Holder Option
<b>SP</b> Spot <b>NFL</b> Narrow Flood <b>FL</b> Flood <b>WFL</b> Wide Flood	<b>BL</b> Black <b>SL</b> Silver <b>WH</b> White	<b>AHR610 BLCK</b> Accessory Holder for R610L, R612L, Black <b>AHR610 WHT</b> Accessory Holder for R610L, R612L, White

Accessories					
<b>AHR610 BLCK 275</b>	Accessory Holder for R610L, R612L, Black	<b>DGF 275</b>	Dichroic Glass Filters	<b>TR11 SPT</b>	Reflector – Spot
<b>AHR610 WHT 275</b>	Accessory Holder for R610L, R612L, White	<b>DCCF 275</b>	Dichroic Color Correction Filters	<b>TR11 NFLD</b>	Reflector – Narrow Flood
<b>HCLBL 275</b>	Hexagonal Cell Louver - Black	<b>DIFF 275</b>	Diffusion Glass Lens	<b>TR11 FLD</b>	Reflector – Flood
<b>SNOOTBL 275</b>	Snoot - Black	<b>UVF 275</b>	UV Filter	<b>TR11 WFLD</b>	Reflector – Wide Flood
<b>EYEBROWBL 275</b>	EyeBrow - Black	<b>LSPREAD 275</b>	Linear Spread Glass Lens		
<b>CGF 275 CLEAR</b>	Clear Glass Lens	<b>PRISM 275</b>	Prismatic Spread Glass Lens		
<b>CGF 275</b>	Color Glass Filters	<b>SOLITE 275</b>	Uniformity Lens (Solite)		

See specification sheet [D1.2.2](#) for details and color filter options. Other accessories can be found on specification sheet [D1.2.0](#).

#### Notes:

- 1 TEK/HTEK adapter is black on silver finish fixtures.
- 2 HTEK versions available with OFF option only, and OFF option only available with HTEK version only.

# TRAC-LITES™

## 37W LED CYLINDER

### R612L SERIES

#### PERFORMANCE DATA<sup>1</sup>

Catalog Number	Input Voltage	Watts (Typical)	Lumens	Efficacy (LPW)	Rated Life (Hours)
R612L 27K 80CRI SP	120V	37.3	3112	83	50,000
R612L 27K 80CRI NFL	120V	37.3	3107	83	50,000
R612L 27K 80CRI FL	120V	37.3	3025	81	50,000
R612L 27K 80CRI WFL	120V	37.3	3036	81	50,000
R612L 27K 90CRI SP	120V	37.3	2658	71	50,000
R612L 27K 90CRI NFL	120V	37.3	2654	71	50,000
R612L 27K 90CRI FL	120V	37.3	2584	69	50,000
R612L 27K 90CRI WFL	120V	37.3	2593	70	50,000
R612L 30K 80CRI SP	120V	37.3	3242	87	50,000
R612L 30K 80CRI NFL	120V	37.3	3236	87	50,000
R612L 30K 80CRI FL	120V	37.3	3151	84	50,000
R612L 30K 80CRI WFL	120V	37.3	3162	85	50,000
R612L 30K 90CRI SP	120V	37.3	2788	75	50,000
R612L 30K 90CRI NFL	120V	37.3	2783	75	50,000
R612L 30K 90CRI FL	120V	37.3	2710	73	50,000
R612L 30K 90CRI WFL	120V	37.3	2719	73	50,000
R612L 35K 80CRI SP	120V	37.3	3307	89	50,000
R612L 35K 80CRI NFL	120V	37.3	3301	88	50,000
R612L 35K 80CRI FL	120V	37.3	3214	86	50,000
R612L 35K 80CRI WFL	120V	37.3	3225	86	50,000
R612L 35K 90CRI SP	120V	37.3	2821	76	50,000
R612L 35K 90CRI NFL	120V	37.3	2815	75	50,000
R612L 35K 90CRI FL	120V	37.3	2741	73	50,000
R612L 35K 90CRI WFL	120V	37.3	2751	74	50,000
R612L 40K 80CRI SP	120V	37.3	3339	90	50,000
R612L 40K 80CRI NFL	120V	37.3	3333	89	50,000
R612L 40K 80CRI FL	120V	37.3	3246	87	50,000
R612L 40K 80CRI WFL	120V	37.3	3257	87	50,000
R612L 40K 90CRI SP	120V	37.3	2821	76	50,000
R612L 40K 90CRI NFL	120V	37.3	2815	75	50,000
R612L 40K 90CRI FL	120V	37.3	2741	73	50,000
R612L 40K 90CRI WFL	120V	37.3	2751	74	50,000

#### ELECTRICAL DATA




Input Voltage	120V
Input Current (max.)	0.31A
Power Factor	>0.90
T.H.D.	<20%

<sup>1</sup>Performance data, including Rated Life, is based on measurements of an individual fixture operating in a 25°C ambient.

# TRAC-LITES™ 37W LED CYLINDER R612L SERIES

**CBCP** • Centerbeam candlepower  
**FC** • Footcandles at beam center (aim point)

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) (0.5774 for 30°, 1.0 for 45°, 1.732 for 60°).



Fixture	Beam Type	Beam Spread	Rated Life	CBCP	0°			30°			30°			45°			60°								
					MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W	D	FC	X	L	W
<b>R612L 37W LED, 3000K, 80CRI Spot</b>	SP	15°	50000	28809	10	288	2.5	2.5	187	3.4	2.9	5	144	8.7	5.3	2.5	407	5.0	2.6	1.8	10	187	5.8	3.4	2.9
					12	200	3.1	3.1	130	4.1	3.5	6	100	10.4	6.4	3.1	283	6.0	3.1	2.2	12	130	6.9	4.1	3.5
					14	147	3.6	3.6	95	4.8	4.1	7	73	12.1	7.5	3.6	208	7.0	3.6	2.5	14	95	8.1	4.8	4.1
					16	113	4.1	4.1	73	5.5	4.7	8	56	13.9	8.6	4.1	159	8.0	4.1	2.9	16	73	9.2	5.5	4.7
					18	89	4.6	4.6	58	6.1	5.3	9	44	15.6	9.6	4.6	126	9.0	4.7	3.2	18	58	10.4	6.1	5.3
<b>R612L 37W LED, 3000K, 80CRI Narrow Flood</b>	NFL	25°	50000	12527	6	348	2.6	2.6	226	3.6	3.1	3.0	174	5.2	6.2	2.6	492	3.0	2.8	1.9	6	226	3.5	3.6	3.1
					8	196	3.5	3.5	127	4.8	4.1	3.5	128	6.1	7.2	3.1	362	3.5	3.2	2.2	8	127	4.6	4.8	4.1
					10	125	4.4	4.4	81	6.0	5.1	4.0	98	6.9	8.3	3.5	277	4.0	3.7	2.5	10	81	5.8	6.0	5.1
					12	87	5.3	5.3	57	7.2	6.1	4.5	77	7.8	9.3	4.0	219	4.5	4.2	2.8	12	57	6.9	7.2	6.1
					14	64	6.2	6.2	42	8.4	7.1	5.0	63	8.7	10.3	4.4	177	5.0	4.6	3.1	14	42	8.1	8.4	7.1
<b>R612L 37W LED, 3000K, 80CRI Flood</b>	FL	42°	50000	5894	4	368	3.0	3.0	239	4.3	3.5	2.0	184	3.5	10.7	3.0	521	2.0	3.6	2.1	4	239	2.3	4.3	3.5
					5	236	3.8	3.8	153	5.3	4.4	2.5	118	4.3	13.4	3.8	333	2.5	4.4	2.7	5	153	2.9	5.3	4.4
					6	164	4.6	4.6	106	6.4	5.3	3.0	82	5.2	16.1	4.6	232	3.0	5.3	3.2	6	106	3.5	6.4	5.3
					7	120	5.3	5.3	78	7.4	6.1	3.5	60	6.1	18.8	5.3	170	3.5	6.2	3.8	7	78	4.0	7.4	6.1
					8	92	6.1	6.1	60	8.5	7.0	4.0	46	6.9	21.4	6.1	130	4.0	7.1	4.3	8	60	4.6	8.5	7.0
<b>R612L 37W LED, 3000K, 80CRI Wide Flood</b>	WFL	57°	50000	3738	3	415	3.3	3.3	270	4.8	3.8	1.5	208	2.6	**	3.3	587	1.5	4.6	2.3	3	270	1.7	4.8	3.8
					4	234	4.4	4.4	152	6.4	5.0	2.0	117	3.5	**	4.4	330	2.0	6.2	3.1	4	152	2.3	6.4	5.0
					5	150	5.4	5.4	97	8.0	6.3	2.5	75	4.3	**	5.4	211	2.5	7.7	3.8	5	97	2.9	8.0	6.3
					6	104	6.5	6.5	67	9.7	7.5	3.0	52	5.2	**	6.5	147	3.0	9.3	4.6	6	67	3.5	9.7	7.5
					7	76	7.6	7.6	50	11.3	8.8	3.5	38	6.1	**	7.6	108	3.5	10.8	5.4	7	50	4.0	11.3	8.8

For 27K 80CRI fixtures, use 0.96 multiplier; for 27K 90CRI fixtures, use 0.82 multiplier; for 30K 90CRI fixtures, use 0.86 multiplier; for 35K 80CRI fixtures, use 1.02 multiplier; for 35K 90CRI fixtures, use 0.87 multiplier; for 40K 80CRI fixtures, use 1.03 multiplier; for 40K 90CRI fixtures, use 0.87 multiplier.

\*\*Due to steep aiming angle, length of beam extends beyond 25'.