



HYLINE501 RGBW

ADDITIONAL KEY FEATURES

- 3G Anti-vibration rating
- IP66 Rated

Housing	Extruded aluminum one-piece construction with fasteners
Available Section lengths	2ft, 3ft, or 4ft
CCT	Dynamic RGBW/RDM
Lumens	800 max lumens per foot
Optics	9° x 9°, 10° x 60°, 15° x 30°, 30° x 60°, 40° x 60°, 60° x 60°, Asymmetric Wall Wash
Voltage	120V - 277V
Controls	DMX



HYLINE501 STATIC WHITE

ADDITIONAL KEY FEATURES

- 3G Anti-vibration rating
- IP66 Rated

Housing	Extruded aluminum one-piece construction with fasteners
Available Section lengths	2ft, 3ft, or 4ft
CCT	27K, 30K, 35K 40K, 50K
Lumens	1000 max lumens per foot
Optics	9° x 9°, 10° x 60°, 15° x 30°, 30° x 60°, 40° x 60°, 60° x 60°, Asymmetric Wall Wash
Voltage	120V - 277V
Controls	0-10V, Dali, DMX



HYLINE501 STATIC COLOR

ADDITIONAL KEY FEATURES

- 3G Anti-vibration rating
- IP66 Rated

Housing	Extruded aluminum one-piece construction with fasteners
Available Section lengths	2ft, 3ft, or 4ft
CCT	Red, Green, Blue and Amber
Lumens	1000 max lumens per foot
Optics	9° x 9°, 10° x 60°, 15° x 30°, 30° x 60°, 40° x 60°, 60° x 60°, Asymmetric Wall Wash
Voltage	120V - 277V
Controls	0-10V, Dali, DMX



HYLINE501 WARMDIM

ADDITIONAL KEY FEATURES

- 3G Anti-vibration rating
- IP66 Rated

Housing	Extruded aluminum one-piece construction with fasteners
Available Section lengths	2ft, 3ft, or 4ft
CCT	Golden range (30K-22K)
Lumens	1000 max lumens per foot
Optics	9° x 9°, 10° x 60°, 15° x 30°, 30° x 60°, 40° x 60°, 60° x 60°, Asymmetric Wall Wash
Voltage	120V - 277V
Controls	0-10V, Dali, DMX



HYLINE501 TUWH

ADDITIONAL KEY FEATURES

- 3G Anti-vibration rating
- IP66 Rated

Housing	Extruded aluminum one-piece construction with fasteners
Available Section lengths	2ft, 3ft, or 4ft
CCT	Warm Neutral, Cool 3-Channel tunable white. Rhythm Range (65K-27K) or Layer Range (50K-22K)
Lumens	1000 max lumens per foot
Optics	9° x 9°, 10° x 60°, 15° x 30°, 30° x 60°, 40° x 60°, 60° x 60°, Asymmetric Wall Wash
Voltage	120V - 277V
Controls	DMX

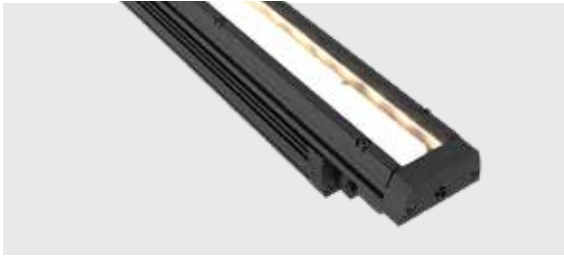


HYCOVE502 RGBW

ADDITIONAL KEY FEATURES

- 3G Anti-vibration rating
- IP66 Rated

Housing	Extruded aluminum one-piece construction with fasteners
Available Section lengths	2ft, 3ft, or 4ft
CCT	RGBW
Lumens	750 max lumens per foot
Optics	120° x 120°
Voltage	120V - 277V
Controls	DMX


ADDITIONAL KEY FEATURES

- 3G Anti-vibration rating
- IP66 Rated

HYCOVE502 STATIC WHITE

Housing	Extruded aluminum one-piece construction with fasteners
Available Section lengths	2ft, 3ft, or 4ft
CCT	27K, 30K, 35K, 40K, 50K
Lumens	1000 max lumens per foot
Optics	120° x 120°
Voltage	120V - 277V
Controls	0-10V, Dali, DMX


ADDITIONAL KEY FEATURES

- 3G Anti-vibration rating
- IP66 Rated

HYCOVE502 STATIC COLOR

Housing	Extruded aluminum one-piece construction with fasteners
Available Section lengths	2ft, 3ft, or 4ft
CCT	Red, Green, Blue and Amber
Lumens	1000 max lumens per foot
Optics	120° x 120°
Voltage	120V - 277V
Controls	0-10V, Dali, DMX


ADDITIONAL KEY FEATURES

- 3G Anti-vibration rating
- IP66 Rated

HYCOVE502 WDIM

Housing	Extruded aluminum one-piece construction with fasteners
Available Section lengths	2ft, 3ft, or 4ft
CCT	Golden range (30K-22K)
Lumens	1000 max lumens per foot
Optics	120° x 120°
Voltage	120V - 277V
Controls	0-10V



HYCOVE502 TUWH

ADDITIONAL KEY FEATURES

- 3G Anti-vibration rating
- IP66 Rated

Housing	Extruded aluminum one-piece construction with fasteners
Maximum Section lengths	Available in 2ft, 3ft, or 4ft
CCT	Warm Neutral, Cool 3-Channel tunable white Rhythm Range (65K-27K) or Layer Range (50K-22K)
Lumens	1000 max lumens per foot
Optics	120° x 120°
Voltage	120V - 277V
Controls	DMX



4750L LINEAR FLOOD

ADDITIONAL KEY FEATURES

- IP67 Rated
- Modular Flow-thru technology
- Available with Design2Ship™ program
- 3G Anti-vibration rating

Housing	Copper free die cast aluminum and corrosion resistant extruded aluminum. All stainless steel fasteners
Available Section lengths	2ft or 4ft
CCT	27K, 30K, 35K, 40K, 50K, Amber
Lumens	2000 max lumens per foot
Optics	15°x15°, 25°x15°, 60°x15°, 95°x15°, Wall wash Asymmetric
Voltage	120V - 277V, 347V
Controls	0-10V, Dali, DMX



4750L LINEAR FLOOD RGBW

ADDITIONAL KEY FEATURES

- IP67 Rated
- Modular Flow-thru technology
- Available with Design2Ship™ program
- 3G Anti-vibration rating

Housing	Copper free die cast aluminum and corrosion resistant extruded aluminum. All stainless steel fasteners
Available Section lengths	4ft
CCT	Dynamic RGBW/RDM
Lumens	1000 max lumens per foot
Optics	15°x15°, 25°x15°, 60°x15°, 95°x15°, Wall wash Asymmetric
Voltage	120V - 277V
Controls	DMX



4750L LINEAR FLOOD TUWH

ADDITIONAL KEY FEATURES

- IP67 Rated
- Modular Flow-thru technology
- Available with Design2Ship™ program
- 3G Anti-vibration rating

Housing	Copper free die cast aluminum and corrosion resistant extruded aluminum. All stainless steel fasteners
Available Section lengths	4ft
CCT	Warm Neutral, Cool 3-Channel tunable white. Rhythm Range (65K-27K)
Lumens	1000 max lumens per foot
Optics	15°x15°, 25°x15°, 60°x15°, 95°x15°, Wall wash Asymmetric
Voltage	120V - 277V
Controls	DMX



4750LCR Continuous Linear Flood

ADDITIONAL KEY FEATURES

- IP67 Rated
- Modular Flow-thru technology
- Available with Design2Ship™ program
- 3G Anti-vibration rating
- Also available in tunable white or RGBW (4ft length only)

Housing	Low copper content housing materials, stainless steel fasteners, and durable powder coat finish options
Available Section lengths	2ft and 4ft
CCT	27K, 30K, 35K, 40K, 50K, Amber
Lumens	2000 max lumens per foot
Optics	VNSP (10x), NSP (20x), MFL (55x), WFL (100x), WWD (wall wash Asymmetric)
Voltage	120V - 277V, 347V
Controls	0-10V, Dali, DMX