

FEATURES & SPECIFICATIONS

INTENDED USE — Ideal for wet location areas requiring emergency lighting that are subject to saturation with non-mechanically delivered water. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.** [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

CONSTRUCTION — Gray, compact, low-profile contemporary design. Engineering-grade thermoplastic housing is impact-resistant, scratch-resistant and corrosion-proof. Rugged, heavy-duty, polycarbonate clear housing lens. UL94V-0 flame rating. UV-stable resin resists discoloration from natural and man-made light sources.

OPTICS — Lamp compatibility: Two 7W wedge-based halogen MR16 style lamps, with 45 degree adjustable heads in all directions.

ELECTRICAL — Dual-voltage input capacity (120V/277V).

Emergency unit provided with test switch, status indicator and rechargeable battery.

Battery: Sealed, maintenance-free, lead calcium battery delivers 90 minute capacity to emergency lamps.

INSTALLATION — Wall-mount standard. Junction box hole pattern for 4" octagon mounting. Flexible conduit entry. Not intended for ceiling mounting.

LISTINGS — UL listed. Wet location listed. Standard temperature rating 68°F to 122°F (20°C to 50°C). Meets UL 924, NFPA 101(current Life Safety Code), NFPA 70-NEC and OSHA illumination standards.

WARRANTY — 3-year limited warranty. (Battery is prorated.) This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:

www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Indura®
Wet Location
Emergency Light

WLTU MR



Specifications

Length: 14-7/8 (37.8)

Depth: 4-1/4 (10.8)

Height: 5-5/8 (14.3)

Weight: 5.2 lbs (2.4 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

Example: WLTU GY MR

WLTU MR
Series
WLTU GY MR Gray housing, two 7W Halogen MR16 lamps

Accessories: Order as separate catalog number. ¹	
ELA WG1	Wireguard (back mount only)

Notes

¹ See spec sheet [ELA-WG](#).

WLTU MR Wet Location Emergency Light

SPECIFICATIONS

ELECTRICAL					
Primary circuit					
	AC volts	Input watts	Max. amps	Output volts	Output watts ¹
WLTU MR	120	6	0.06	6	14
	277	6.2	0.3		

BATTERY				
Sealed lead calcium				
Voltage	Typical shelf life ²	Typical life ²	Maintenance ³	Temperature range ⁴
6	12 months	4-5 years	none	68° – 122°F (20° – 50°C)


Notes

- 1 Based on 1-1/2 hour run time rating.
- 2 At 77°F (25°C).
- 3 All life safety equipment, including emergency lighting for path of egress, must be maintained, serviced and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service or testing could jeopardize the safety of occupants and will void all warranties.
- 4 Temperature range where unit will provide capacity for 90 minutes. Higher and lower temperatures affect life and capacity.

LAMP PHOTOMETRICS

MULTIPLE COVERAGE

Using multiple units at a typical 7.5' mounting height delivers 20' center-to-center spacing on a 3' path of egress.

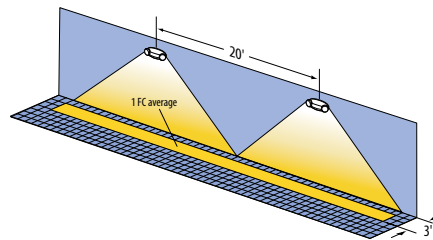

Example of multiple units illuminating a 3' path of egress