



Catalog Number
Notes
Type

Contractor Select™  
**65BE 65SE SWW5**  
 E Series 5"/6" Switchable White LED Trim Kit

With Juno® E Series LED switchable white 5"/6"-inch trim kits, upgrading your existing 5/6-inch recessed fixture is inexpensive and nearly as simple as replacing an incandescent lamp. The 5"/6" recessed LED downlight is the most economical means to create a well lit environment with exceptional energy efficiency and near zero maintenance. Great for retrofit into existing downlight cans or new construction and remodel applications. The LED downlight maintains at least 70% light output for 50,000 hours. Trims are ENERGY STAR® certified and can be used to comply with Title 24, JA8 high efficacy light source requirements, T20 certified, Air-loc certified, Wet location listed and includes a 5-year limited warranty.

**FEATURES:**

- 5 switchable white color temperatures to choose from via switch; 2700K, 3000K, 3500K, 4000K, 5000K CCT; 90 CRI
- Dimmable flicker-free dimming from 100% to 10%
- Baffle or smooth trim options with designer color finish trim inserts (sold separately)

Ships with:



**E26 Adapter**



**CONTRACTOR PACK (CP6) ORDERING EXAMPLES:**

**Example 1: Ordered in Qty of 1**

Ordered Line: Qty: 1 65SEMWHLSWW5 90CRI CP6 M2  
 \*Will receive 1 box with 6 units not individually packaged

**Example 2: Ordered in Qty of 2**

Ordered Line: Qty: 2 65SEMWHLSWW5 90CRI CP6 M2  
 \*Will receive 1 master carton that includes 2 separate boxes with 6 units in each box not individually packaged

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Dimming Protocol	Pallet qty.
65SEMWHLSWW5 90CRI M6	194994825197	5"/6" Switchable White LED Trim Kit - Smooth	75W Incandescent	900	10.5W	2700K-5000K	90	120V	White	100% to 10%	216
65SEMWHLSWW5 90CRI M6	194994825173	5"/6" Switchable White LED Trim Kit - Smooth	120W Incandescent	1200	14.5W	2700K-5000K	90	120V	White	100% to 10%	360
65BEMWHLSWW5 90CRI M6	194994160564	5"/6" Switchable White LED Trim Kit - Baffle	75W Incandescent	900	10.5W	2700K-5000K	90	120V	White	100% to 10%	180
65BEMWHLSWW5 90CRI M6	194994244950	5"/6" Switchable White LED Trim Kit - Baffle	120W Incandescent	1200	14.5W	2700K-5000K	90	120V	White	100% to 10%	270
65SEMWHLSWW5 90CRI CP6 M2	197589055757	5"/6" Switchable White LED Trim Kit - Smooth	120W Incandescent	1200	14.5W	2700K-5000K	90	120V	White	100% to 10%	60



## Specifications

### DOWNLIGHT LED TRIM KIT:

Aluminum spun reflector with deep regression for reduced glare • Inner reflector cone funnels light through the pressed-in diffused lens • All-in-one design where LED light engine mounts directly to trim for ease of installation into existing 5" or 6" recessed housings with medium base sockets • Provided with torsion springs.

### LED LIGHT ENGINE:

LEDs are mounted directly to aluminum housing providing superior thermal management to ensure long life • Switchable white LED color temperature technology offers 2700K, 3000K, 3500K, 4000K, 5000K all in one trim • 90 CRI minimum • Accommodates 120 volts AC at 60Hz • Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers • For a list of compatible dimmers, see [JUNOESERIES-DIM](#).

### OPTICAL SYSTEM:

Diffused lens at end of mixing chamber to provide even light distribution for general illumination • 900L is equivalent to 75W BR30 lamp • 1200L is equivalent to 120W lamp.

### ELECTRICAL CONNECTIONS:

Trim features quick connect plug installed as standard for installation into Juno quick connect housings with mating connector • Trim ships with a medium base socket adapter whip for installation into 5" or 6" incandescent housings with medium base sockets.

### DESIGNER COLOR FINISH TRIM INSERTS: (sold separately)

Color Finish Trim inserts are accessory rings that attach to the 65BE/65SE downlight for a permanent finish. Trim styles include baffle or smooth in the following finishes:

- Black
- Brush Nickel
- Oil-Rubbed Bronze

### LIFE:

Rated for 50,000 hours at 70% lumen maintenance.

### LABELS:

CSA certified to US and Canadian safety standards • ENERGY STAR® certified product • Suitable for wet location • Air-Loc certified in accordance with ASTM E283-2004 • NOM Certified • Can be used to comply with California Title 24 Part 6 High Efficacy LED light Source Requirements • T20 Certified.

### TESTING:

All reports are based on published industry procedures; field performance may differ from laboratory performance.


### WARRANTY:

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:

[www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)


**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

## Dimensions

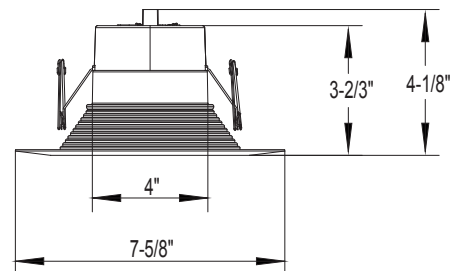

**Pairs perfectly with Juno housings for a complete downlight solution:**  
Order housings as separate catalog number.

### QC6 Series - New Construction Quick Connect LED Housing

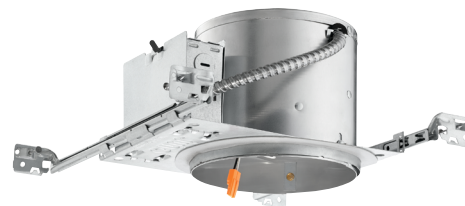

### QC6R Series - New Construction Quick Connect LED Housing

