

## FEATURES & SPECIFICATIONS

**INTENDED USE** — To be powered by Quantum series emergency units and any battery voltage system between 5VDC and 30VDC output and with adequate wattage capacity. Remote lamp head matches the appearance of the Cortez™ CZQ2L, CZQ4L, CZQ6L series units, as part of an emergency lighting system providing light for the path of egress. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.** [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

**CONSTRUCTION** — Compact, low-profile contemporary design, available in white (standard) or black. Engineering-grade thermoplastic housing is impact-resistant, scratch-resistant and corrosion-proof.

UV stable resin resists discoloration from natural and man-made light sources. Strong, compact and corrosion-resistant with a UL94V-0 flame rating.

Single or twin heads available.

Fully adjustable lamp heads to meet all aiming requirements.

Universal J-box mounting pattern. Tool-less access for maintenance. **US Patent No. D483,511.**

**OPTICS** — LED, available in: 1.2W (LP220L) or 3.3W (SP640L) lamps @ 5VDC-20VDC input, and 5.3W (SP1100L) lamps @ 7VDC-30VDC input. The typical life of the LED is 10 years.

LEDs provide nominal 70 CRI at 5000 K.

**INSTALLATION** — Wall or Ceiling mount standard. Flexible conduit entry provision on top of the unit. **US Patent No. D483,511.**

**LISTINGS** — UL damp location listed standard and wet location listed when used with the CZWPVS accessory, up to -22-104°F (-30 -40°C). Meets UL 924, NFPA 101 (current Life Safety Code). Meets NFPA 70 (NEC), C22.2 CSA. Meets all applicable FCC requirements. Meets NEC and OSHA illumination standards. Meets Mexican standards. Available for sale in California.

**BUY AMERICAN** — Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.


Specifications subject to change without notice.

## MOUNTING

All dimensions are inches (centimeters) unless otherwise indicated.


### CZQRE LP220L SGL / T Specifications

Length: 6.87 (174)  
Depth: 3.53 (90)  
Height: 4.67 (119)  
Weight of SGL: 0.75 lbs (0.34kg)  
Weight of T: 0.8 lbs (0.36kg)

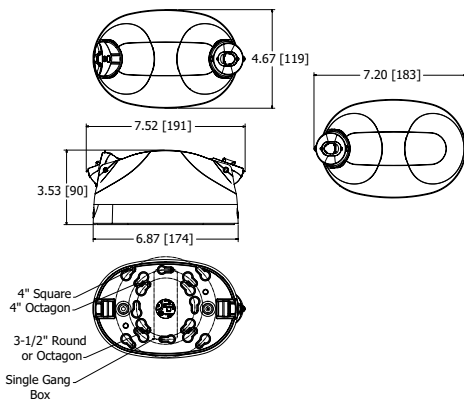

### CZQRE SP640L SGL / T CZQRE SP1100L SGL / T Specifications

Length: 6.87 (174)  
Depth: 3.69 (94)  
Height: 4.67 (119)  
Weight of SP640L SGL: 1.05lbs (0.48kg)  
Weight of SP640L T: 1.55lbs (0.70kg)  
Weight of SP1100L SGL: 1.2lbs (0.54kg)  
Weight of SP1100L T: 1.65lbs (0.75kg)

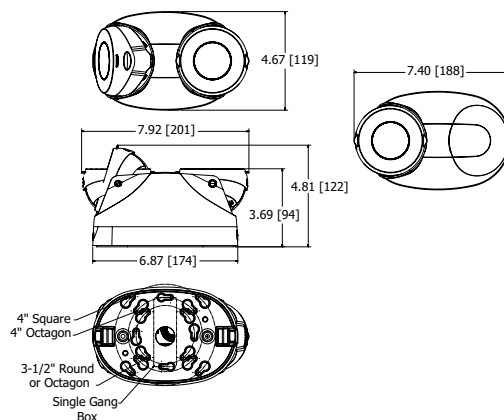

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Cortez™

LED Thermoplastic Emergency Remote

# CZQRE



# CZQRE Cotrez™ LED Thermoplastic Emergency Light

## ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

**Example:** CZQRE LP220L SGL

| Series   | Voltage                             | Lamp Type  | Housing Color                   | Number of lamps  | Options                             |
|--|-------------------------------------|--|---------------------------------|--|-------------------------------------|
| <b>CZQRE</b> Cotrez™ LED Thermoplastic Emergency Light | <b>(blank)</b> Universal DC voltage | <b>LP220L</b> 110 lumen, 1.2 watt, Linear pattern, 5VDC-20VDC input<br><b>SP640L</b> 320 lumen, 3.3 watt, Spot pattern, 5VDC-20VDC input<br><b>SP1100L</b> 550 lumen, 5.3 watt, Spot pattern, 7VDC-30VDC input | <b>(blank)</b> White<br>B Black | <b>(blank)</b> Fixed lamps only<br><b>SGL</b> Single, aimable<br><b>T</b> Twin, aimable <sup>1</sup> | BAA Buy America(n)<br>Act Compliant |

**Accessories:** Order as separate catalog number.

**CZWPVS SML W** White, wet protective vandal shield (must be used for wet location applications. Decreases delivered lumens up to 20%. For black, change W to B.

### Notes

1 For twin (T) remote, multiply lumens and watts by 2.



CZQRE LP220L T with CZWPVS SML W accessory for wet locations and vandal protection

## BATTERY CAPACITY AND LOADING

| Battery Option (LTP Only) | Battery Voltage | Total Capacity 90 Minutes | LP220L (1.2 Watts each) Maximum # Remote Lamps <sup>1</sup> | SP640L (3.3 Watts each) Maximum # Remote Lamps <sup>1</sup> | SP1100L (5.3 Watts each) Maximum # Remote Lamps <sup>1</sup> |
|---------------------------|-----------------|---------------------------|---|---|--|
| CZQ2L LTP                 | 9.6V            | 4.8 watts                 | 2   | 0   | 0  |
| CZQ4L LTP                 | 9.6V            | 11 watts                  | 3   | 1   | NA   |
| CZQ4L LTP HO              | 9.6V            | 22 watts                  | 12  | 4   | 2  |
| CZQ4L LTP EHO             | 12.8V           | 32 watts                  | 21  | 7   | 6  |
| CZQ6L LTP                 | 9.6V            | 11 watts                  | 0   | 0   | 0  |
| CZQ6L LTP HO              | 9.6V            | 22 watts                  | 9   | 3   | 2  |
| CZQ6L LTP EHO             | 12.8V           | 32 watts                  | 17  | 6   | 4  |
| CZQ6L LLH LTP             | 9.6V            | 11 watts                  | 9   | 3   | 2  |
| CZQ6L LLH LTP HO          | 9.6V            | 22 watts                  | 18  | 6   | 4  |
| CZQ6L LLH LTP EHO         | 12.8V           | 32 watts                  | 26  | 9   | 6  |

### Notes

1 These are in addition to the lamp heads on the product.