



## LBR Series


### New Construction Downlight

- Switchable CCTs and lumens
- Aperture sizes including 4", 6", 8", and 10"
- Glare control with deep source regression
- Up to 114 LPW
- Available with battery pack, IOTA emergency transfer system (ETS), 347V step-down transformer and optional wet location (IP55) listed
- nLight® wired or wireless lighting controls and SensorSwitch™ JOT single room controls
- 10% and 1% dimming, MVOLT 120-277V, 0-10V and phase dimming in an all-in-one driver or a separate DALI driver



# Make the Switch to LBR

## Switchable CCTs & Lumens

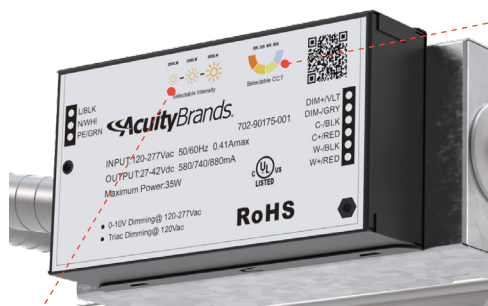


### CCTs

- 3000K
- 3500K
- 4000K
- 5000K

### Lumen Packages


- 500, 750, 1000LM
- 1000, 1500, 2000LM
- 2000, 2500, 3000LM
- 4000, 4500, 5000LM

## Deep Source Regression

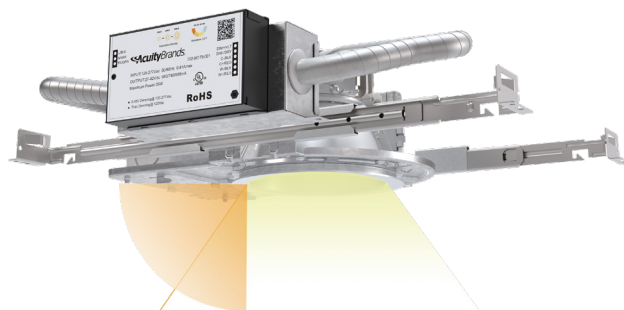

55° Cutoff

## Options

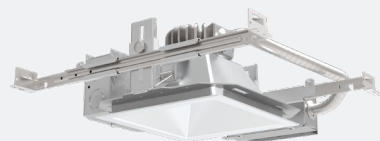

Square trims for 4" and 6" aperture sizes



Medium Wide  
1.0 S:MH



Wide  
1.2 S:MH



Wallwash

Choose from multiple distribution options



Retrofit and remodel options are available for renovation projects



## Lighting Controls

**sensorswitch**

SensorSwitch™ JOT is a wireless, app free solution for single room controls

**nLIGHT**

The nLight® platform offers wired or wireless networked lighting controls solution