




Catalog Number
Notes
Type

Contractor Select™

# FMVCCLS Vanity LED

Contemporary Switchable  
Cylinder Vanity

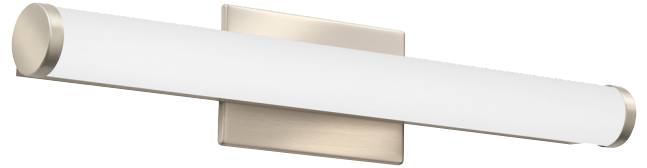

Provides an LED lighting platform to deliver general or task lighting for residential and light commercial applications. Light engine delivers long life and excellent color to ensure a quality, low-maintenance light installation. Ideal for use in bathrooms, lavatories, hallways, corridors, stairways, utility areas and more.

**FEATURES:**

- 2' delivers 1690 lumens and 27 watts
- Fixture is rated to deliver L70 performance at 50,000 hours and operates at 120-277 volts.



ADA



Catalog Number	UPC	Description	Lumens	Input Watts	Voltage	Color Temperature	Pallet qty.
FMVCCLS 24IN MVOLT 30K35K40K 90CRI BN M6	191848780770	2' LED Vanity	1690	27W	MVOLT	3000K, 3500K, 4000K	72



## Specifications

### INTENDED USE:

Provides an LED lighting platform to deliver general or task lighting for residential and light commercial applications. Light engine delivers long life and excellent color to ensure a quality, low-maintenance light installation. Ideal for use in bathrooms, lavatories, hallways, corridors, stairways, utility areas and more.

### CONSTRUCTION:

The Contemporary Cylinder is constructed of an acrylic diffuser with brushed nickel housing. The included canopy/junction box cover is removable for a more low-profile look. The white acrylic diffuser provides even illumination and softens the appearance of the LEDs for improved aesthetics.

### OPTICS:

The FMVCCLS Contemporary Cylinder Vanity has an integrated switch to select 3000K, 3500K or 4000K color temperature at the time of installation.

2' delivers 1690 lumens at 3000K CCT with 50,000 hours of life. See table to the right for delivered lumens at the different CCT color switch settings.

Extruded acrylic diffuser is of highly transmissive material to minimize LED image and provides highangle brightness control.

### ELECTRICAL:

Long-life LEDs, coupled with a multivolt and dual dimmable capable driver, provide extended service life.

Standard input = 27 watts, (2'). Fixture is rated to deliver L70 performance at 50,000 hours and operates at 120-277 volts.

This fixture is dimmable by either triac or 0-10V dimming. Use with approved triac or 0-10V dimmer only.

### LISTINGS:

UL Listed to US and Canadian safety standards. Listed for damp locations. ENERGY STAR® certified. Complies with 2019 Title 24, Part 6, JA8 High Efficacy LED light source requirements.

### WARRANTY:

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:

[www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

## Dimensions

SPECIFICATIONS	2FT
<b>Length:</b>	22-3/8 (568)
<b>Weight:</b>	2.1 (95)
<b>3000K Lumens (LPW)</b>	1690 (94)
<b>3500K Lumens (LPW)</b>	1800 (103)
<b>4000K Lumens (LPW)</b>	1850 (102)

All dimensions are inches (millimeters) unless otherwise indicated. Weights are pounds (kilograms).

