

PATHPORT RACK-MOUNT DMX/RDM ETHERNET GATEWAY



Models shown: 1. PWPP RM P8 XLR5F FRONT IEC
2. PWPP RM P4 [xxxx] REAR DCPOE

WARRANTY

3-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

NOTE

Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.



Pathway Pro marked products are geared for advanced entertainment lighting system applications and are available only to authorized buyers.



Pathport Rack-mount models support SixEye cloud-based remote management



OVERVIEW

The Pathport[®] series of DMX/RDM Ethernet Gateways are the heart of DMX distribution.

Connect DMX512 control devices and send data over an Ethernet network to DMX512-capable end devices such as intelligent lighting fixtures, LEDs, dimmers, and more. Each port can be configured as an Input or Output as needed.

Advanced features include extensive protocol support, slot-by-slot patching using multiple sources, cross-fading on priority change, and signal loss behavior. Multiple connector options are available, such as 5-Pin XLR, terminal block, and RJ45 etherCON.

Status LEDs for each port provide instant confirmation of DMX activity and direction. The LCD display and encoder knob allow for front panel configuration and reporting of the most commonly used features, such as IP address and subnet mask, port direction, and protocol selection. Different Ethernet protocols may be merged together and prioritized.

FEATURES

- Convert DMX512 to Ethernet protocol for distribution
- Convert Ethernet protocol to DMX512 for end devices
- Four or Eight DMX512 ports, individually configurable
- 10/100 Mbps Ethernet network port
- Front panel interface supports configuration of IP settings, port direction, basic patching, and more
- DMX output configured as whole universes or custom slot-by-slot patch
- Map up to eight control sources to each output slot, with merge and/or priority options user-configurable for each source
- Acts as E1.20 RDM controller, when used with free Pathscape configuration software or ANSI E1.33 RDMnet compliant controllers
- User-configurable DMX output speed and signal loss behavior
- Supports the following DMX-over-Ethernet sending and receiving protocols:
 - Pathway ssACN (Secure sACN)
 - E1.31 streaming ACN (sACN)
 - Art-Net
 - Pathport Protocol
 - ShowNet
- Silent, fan-less operation
- Rack-mount ears included
- Wide-range line voltage power input (P8), or PoE/DC-powered (P4 and P8)
- Contact closure input configurable per port to Pause RDM or DMX Force Hold
- Also available in DIN-mount (PWPP DIN) and Wall-mount (PWPP WM) form factors

ORDERING INFORMATION

PWPP				EXAMPLE: PWPP RM P8 XLR5F REAR IEC		
Series	Form Factor	Port Quantity	Port Type	Port Location	Power Connector	
PWPP Pathway Pathport DMX/RDM Ethernet Gateway	RM Rack-mount	P4 ^{1,2} 4 DMX Ports P8 8 DMX Ports	XLR5F XLR 5-Pin Female TERM ³ Compression-Fit Terminal RJ45EC ^{4,5} RJ45 etherCON XLRTERM ^{2,6} XLR 5-Pin Female & Compression-Fit Terminal	FRONT Ports on Front Panel REAR Ports on Rear Panel FRTRR Ports on Front AND Rear Panel [XLRTERM] XLR ports on Front and Terminal on Rear	IEC 100-240 50/60 Hz VAC- lead included DCPOE Class 2 PoE or 24-48 VDC ⁷	

Notes

- P4 available with REAR ports and DCPOE only.
- P4 not available with XLRTERM.
- TERM ports available on REAR only; not available with FRTRR.
- RJ45EC not available with FRTRR.
- Models with RJ45EC are custom-built and are not returnable.
- XLRTERM only available on P8, with FRTRR.
- Optional purchase PWPWR WW BARL 24W 24VDC.

SPECIFICATIONS

Electrical	Input Ratings	PWPP RM P8 XX IEC 100-240VAC, 50/60Hz wide-range power input 0.08A max power consumption	
		PWPP RM XX DCPOE PoE Class 2 device 24-48VDC auxiliary power input 8W maximum power consumption	
	Isolation & Fault Protection	3000V isolation between DMX ports 250V fault protection on DMX ports	
	Regulatory Compliance	PWPP RM IEC PWPP RM P4	ETL, CE CE
Mechanical	Dimensions	PWPP RM P8 PWPP RM P4	17" W x 1.7" H x 7.0" D (433mm W x 43mm H x 178mm D) 8.6" W x 1.7" H x 7.0" D (218mm W x 43mm H x 178mm D)
	Weight	PWPP RM P8 PWPP RM P4	5.2 lbs (2.4 kg) [base device, without rack mounting hardware] 2.3 lbs (1 kg) [base device, without rack mounting hardware]
Environmental	Operating Temperature	14°F to 122°F (-10°C to 50°C)	
	Relative Humidity	5-95%, non-condensing	
	Standard Compliance	RoHS 2011/65/EU + A1 2015/863	
General	Compliance	ANSI E1.11 DMX512-A R2013 ANSI E1.20 RDM - Remote Device Management ANSI E1.31 sACN - Streaming ACN, Art-Net, Strand ShowNet, Pathway ssACN ANSI E1.33 RDMnet - RDM over IP California Title 1.81.26, Security of Connected Devices FAR-889 Section 889(a)(1)(A) and Section(a)(1)(B)	
		PWPP RM XX DCPOE IEEE 802.3af Power-over-Ethernet	
Government Procurement	BAA	Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.	
	BABA	Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.	
		Please refer to www.acuitybrands.com/buy-american for additional information.	

PART NUMBER CROSS-REFERENCE

PREVIOUS		NEW	
Part Number	Catalog Number	Description	
6321 (QUATTRO)	PWPP RM P4 XLR5F REAR DCPOE	Pathport, Rack-mount, 4-Ports, XLR 5-Pin Female, Rear Panel Connectors	
6322 (QUATTRO)	PWPP RM P4 TERM REAR DCPOE	Pathport, Rack-mount, 4-Ports, Compression Fit Terminal, Rear Panel Connectors	
6326 (QUATTRO)	PWPP RM P4 RJ45EC REAR DCPOE	Pathport, Rack-mount, 4-Ports, RJ45 EtherCON, Rear Panel Connectors	
6421 (OCTO)	PWPP RM P8 XLR5F REAR IEC	Pathport, Rack-mount, 8-Ports, XLR 5-Pin Female, Rear Panel Connectors	
6422 (OCTO)	PWPP RM P8 TERM REAR IEC	Pathport, Rack-mount, 8-Ports, Compression Fit Terminal, Rear Panel Connectors	
6423 (OCTO)	PWPP RM P8 XLR5F FRONT IEC	Pathport, Rack-mount, 8-Ports, XLR 5-Pin Female, Front Panel Connectors	
6424 (OCTO)	PWPP RM P8 XLRTERM FRTRR IEC	Pathport, Rack-mount, 8-Ports, Front XLR 5-Pin Female, Rear Terminal, Front and Rear Panel Connectors	
6425 (OCTO)	PWPP RM P8 XLR5F FRTRR IEC	Pathport, Rack-mount, 8-Ports, XLR 5-Pin Female, Front and Rear Panel Connectors	
6426 (OCTO)	PWPP RM P8 RJ45EC REAR IEC	Pathport, Rack-mount, 8-Ports, RJ45 EtherCON, Rear Panel Connectors	
6427 (OCTO)	PWPP RM P8 RJ45EC FRONT IEC	Pathport, Rack-mount, 8-Ports, RJ45 EtherCON, Front Panel Connectors	





ADDITIONAL ORDERING INFORMATION

Accessories			
PWCON PH5 IDC3 Q4	Connector, 5-Pin Phoenix, 3-Pin Insulation Displacement Contact Connector, (Qty 4)	PWPWR WW BARL 24W 24VDC	Power Supply, Wallwart, Barrel, 24 Watts, 24 Volts DC (for PWPP RM XX DCPOE)
PWACC WMLG	Pathway Accessory, Large Rack-mount to Wall-mount kit	PWACC XLRMKIT	Pathway Accessory Front XLR Connector Kit, Pathport Rackmount 4-port, XLR5M Input (x4)
PWACC TMLG	Pathway Accessory, Large Rack-mount to Truss-mount kit	PWACC XLRFKIT	Pathway Accessory Front XLR Connector Kit, Pathport Rack-mount 4-port, XLR5F Output (x4)
PWACC TMSM	Pathway Accessory, Small Rack-mount to Truss mount kit	PWACC XLRMFKIT	Pathway Accessory Front XLR Connector Kit, Pathport Rack-mount 4-port, XLR5M (x2), XLR5F (x2)
PWACC WMSM	Pathway Accessory, Small Rack-mount to Wall-mount kit		
PWACC EARS	Pathway Accessory, 19" Replacement Rackmount Ear Kit		

WIRING


DMX512 / RDM PINOUT		
Purpose	XLR / Terminal Block Pin #	RJ45 PIN # and Wire Color
Shield / Common	1	7 - White / Brown
Data - (complement)	2	2 - Orange
Data + (true)	3	1 - White / Orange
Not Used	4	6 - Green
Not Used	5	3 - White / Green
Not Used - Do Not Connect	N/A	4 - Blue
Not Used - Do Not Connect	N/A	5 - White / Blue
Not Used - Do Not Connect	N/A	8 - Brown

FRONT PANEL

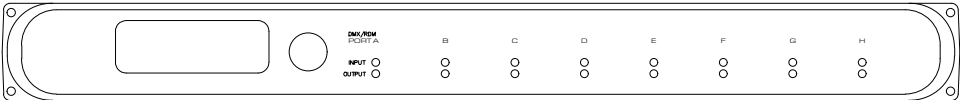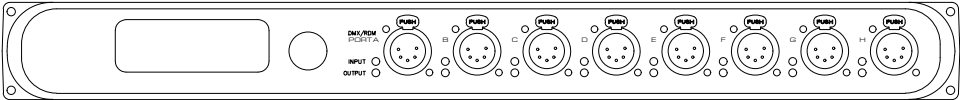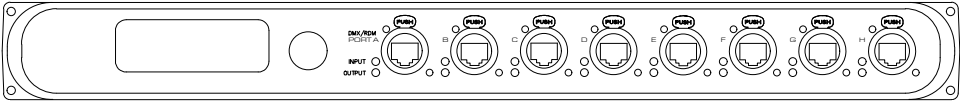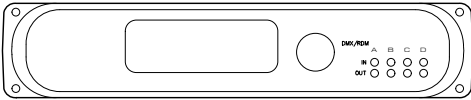PWPP RM P8	XLR5F TERM RJ45EC	REAR	
PWPP RM P8	XLR5F XLRTERM	FRONT FRTRR	
PWPP RM P8	RJ45EC	FRONT	
PWPP RM P4	ALL MODELS		

REAR PANEL


PWPP RM P8 XLR5F REAR IEC




PWPP RM P8 XLR5F RJ45EC FRONT IEC




PWPP RM P8 TERM XLRTERM FRONT IEC FRTRR




PWPP RM P8 RJ45EC REAR IEC




PWPP RM P8 XLR5F REAR DCPOE




PWPP RM P8 XLR5F RJ45EC FRONT DCPOE




PWPP RM P8 TERM XLRTERM FRONT DCPOE FRTRR




PWPP RM P8 RJ45EC REAR DCPOE




PWPP RM P4 XLR5F REAR DCPOE



PWPP RM P4 TERM REAR DCPOE




PWPP RM P4 RJ45EC REAR DCPOE




DIMENSIONS

PWPP RM P8

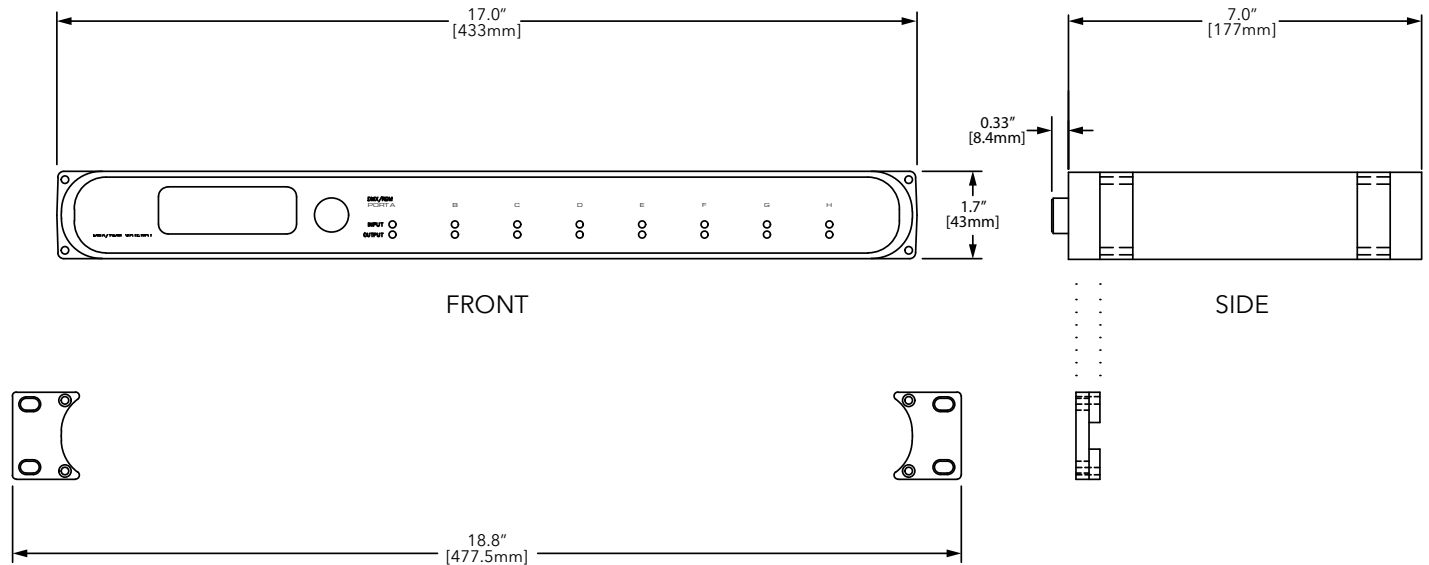


PWPP RM P4

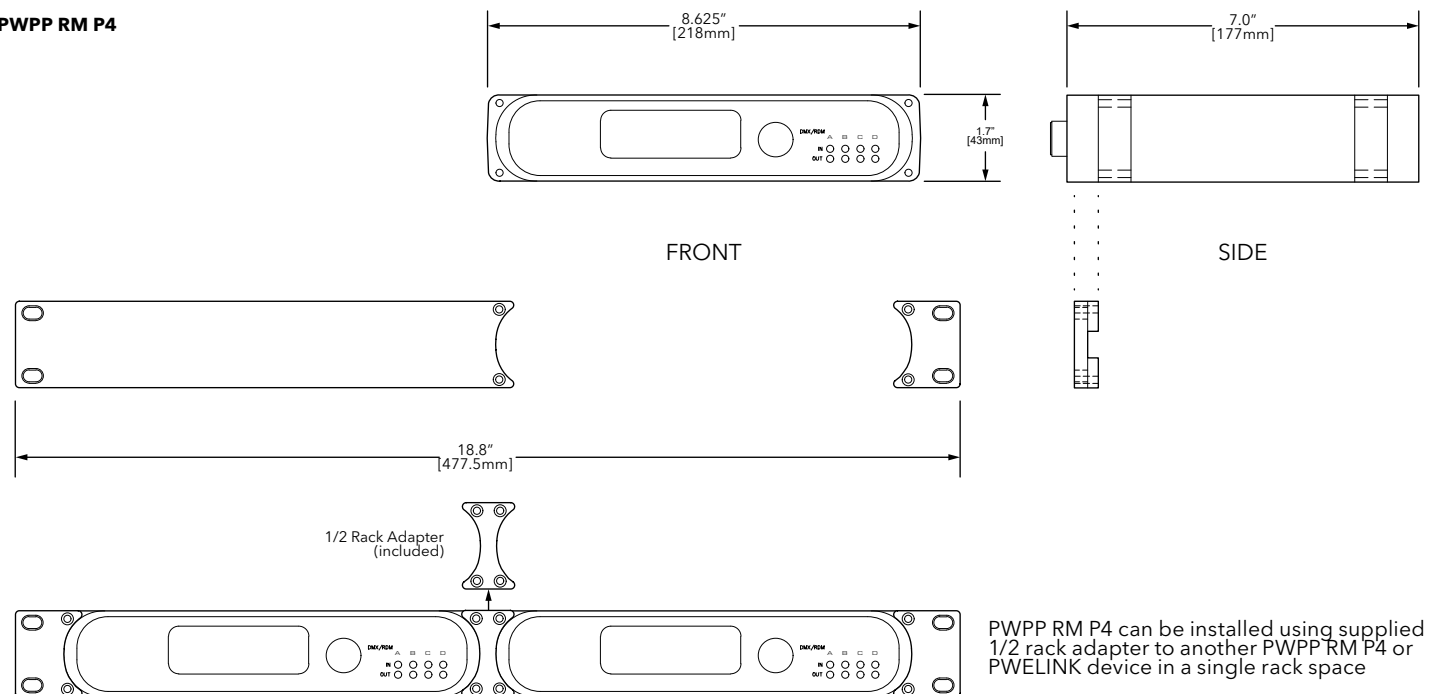


TRUSS & WALL MOUNT ACCESSORIES

PWACC TMLG Large Truss-mount Kit

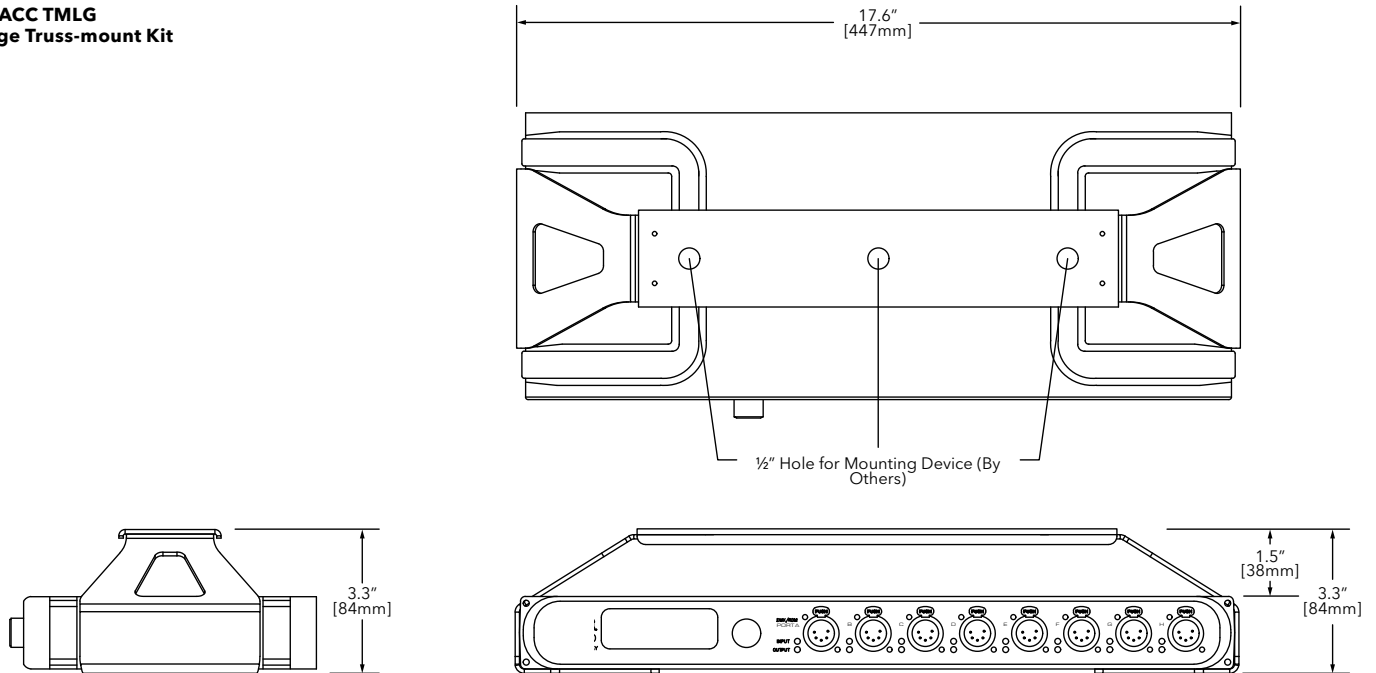


PWACC WMLG Large Wall-mount Kit

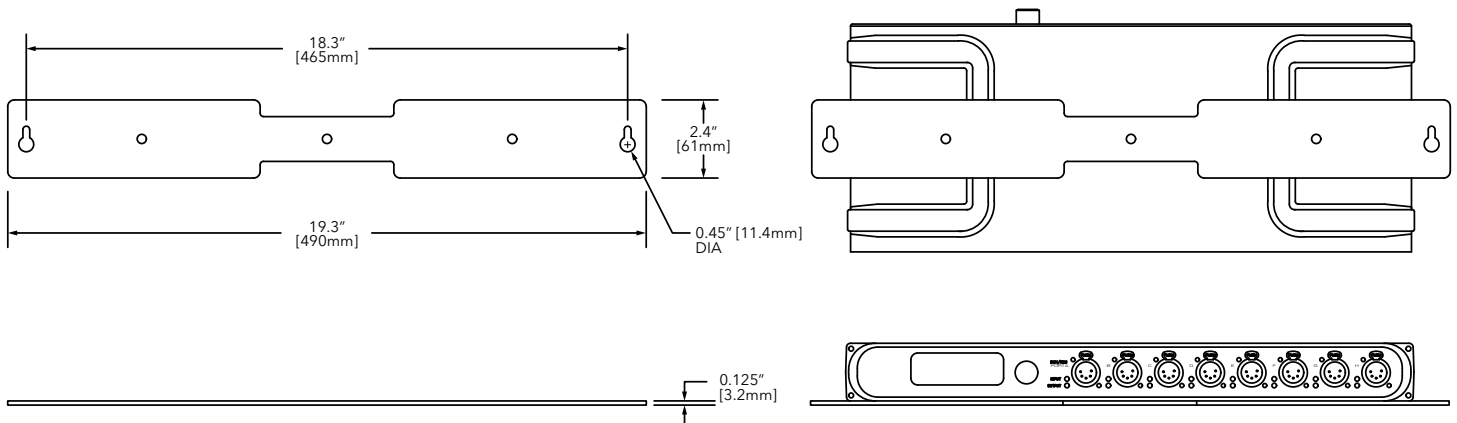


CONNECTOR KIT ACCESSORY

PWACC XLRFKIT Front XLR Connector Kit

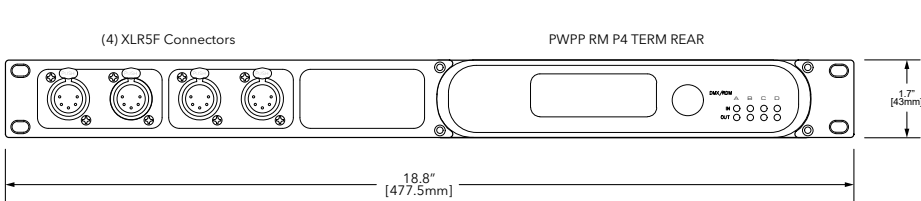

FRONT

PWACC XLRFKIT Shown
(4 XLR 5-Pin Female Connectors)
4 XLR 5-Pin Male and 2-Female/2-Male
versions also available.

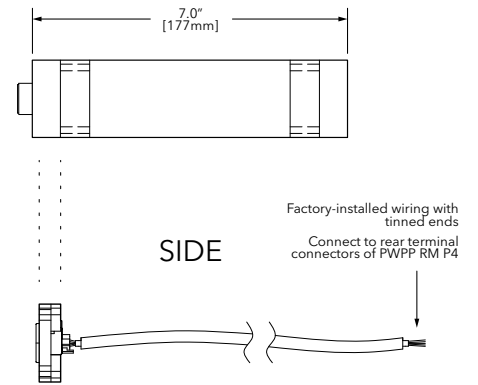

SIDE

APPLICATION RISER

