


High Center Beam Wall Mount Tilt & Rotate Cylinder

4"

Feature Set

- Eleven optimized distribution patterns allow designers to achieve tailored objectives
- Bounding Ray™ optical design
- 45° cutoff to source and source image
- Fully serviceable lensed LED light engine
- 70% lumen maintenance at 60,000 hours
- 2.5 SDCM; 85 CRI typical, 90+ CRI optional
- Fixtures are damp location standard; wet location option (WL), covered ceiling, IP66 option available, covered ceiling not required.
- 20 standard colors in textured and gloss finish; custom or RAL colors also available
- Adjustable wall mount tilts up to +40° and down to -20° with +/-40° left/right rotation from vertical
- ENERGY STAR® Certified product
- UGR of zero for fixtures aimed at nadir with a cut-off equal to or less than 60deg per CIE 117-1995 Discomfort Glare in Interior Lighting. UGR FAQ ([UGR FAQ](#))

Distribution



Superior Performance

Nominal Lumens	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000
Delivered	703	807	1062	1545	1977	2419	2920	3548	3982	4419	4848
Wattage	6.7	7.5	9.8	15.1	21.5	26.5	34.1	33.8	39.5	46.2	53.2
Efficacy	104	108	108	102	92	91	86	105	101	96	91



Coordinated Apertures | Multiple Layers of Light



General Illumination Layer | EVO



High Center Beam Layer | Incito



EVO + Incito — Multiple Layers of Light

Core



Downlight



Adjustable



Open Wallwash



Lensed Wallwash



Cylinder



Pinhole



Bevel



Hyperbolic

Healthcare



MRI



Surgical Suite



Patient Room

Special Applications



Dynamic



Food Service



Vandal/Tamper




Clean Room



Shower



Steam Room



Luminaire Type:

Catalog Number:

EXAMPLE: IC04WTRC 35/15 AR LSS 35D MVOLT EZ1 JBX DN DWHG

Series	Color Temperature	Lumens	Reflector Color	Reflector Finish	Beam	Voltage
IC04WTRC Incito 4in Wall Mount Tilt+Rotate Round Cylinder Open Downlight	27/ 2700 K	05 500 lumens	AR Clear	LSS Semi-specular	10D ² 10° beam angle	MVOLT 120V - 277V
	30/ 3000 K	07 750 lumens	PR Pewter	LD Matte diffuse	15D 15° beam angle	120 120V
	35/ 3500 K	10 1000 lumens	WTR Wheat	LS Specular	20D 20° beam angle	277 277V
	40/ 4000 K	15 1500 lumens	GR Gold		25D 25° beam angle	347 ³ 347V
	50/ 5000 K	20 2000 lumens	WR ¹ White painted		30D 30° beam angle	
		25 2500 lumens	BR ¹ Black		35D 35° beam angle	
		30 3000 lumens	WRAMF ¹ White anti-microbial		40D 40° beam angle	
		35 3500 lumens	BZR ¹ Dark Bronze painted		45D 45° beam angle	
		40 4000 lumens	TRALTBD ¹ Trim RAL # TBD (TBD for pricing only)		50D 50° beam angle	
		45 4500 lumens	TCPC ¹ Trim Custom Paint Color TBD (TBD for pricing only)		60D 60° beam angle	
		50 5000 lumens			65D 65° beam angle	

Driver ⁴	Mounting	Fixture Orientation	Emergency Option
GZ10 0-10V driver dims to 10%	JBX Integral driver, Recessed or Surface J-box	DN Mounted with reflector pointing down	(blank) No emergency options
GZ1 0-10V driver dims to 1%		UP ⁷ Mounted with reflector pointing up	E6W 6W integral emergency battery
EZ10 eldoLED 0-10V EC0drive. Linear dimming to 10% min.	JBXCC Integral driver, Surface J-box with Conduit Covers		E7WCP IOTA® 7W emergency battery (sidecar)
EZ1 eldoLED 0-10V EC0drive. Linear dimming to 1% min.			E10WCP IOTA® 10W emergency battery (sidecar)
EZB eldoLED 0-10V SOLOdrive. Logarithmic dimming to <1%.			E15WCP IOTA® 15W emergency battery (sidecar)
EDAB ⁵ eldoLED SOLOdrive DALI. Logarithmic dimming to <1%.			
EDXB ^{5,6} eldoLED POWERdrive DMX with RDM (remote device management). Square Law dimming to <1%. Min: 1000LM; Max: 4000LM			
ECOS2 ⁵ Lutron® Hi-Lume® 2-wire forward-phase driver. 120V Only. Minimum dimming level 1%. 1000 - 2000 LUMENS, NOT AVAILABLE WITH "WL" OR "WLL" OR "HAO"			
ECOD ⁵ Lutron® EcoSystem® digital Hi-Lume 1% soft-on, fade to black. Max: 4000LM.			

Control Interface ⁸	Options	Architectural Colors - Powder Paint ¹³	
(blank) No controls	SF Single fuse. Specify 120V or 277V.	DDB Gloss Dark Bronze	DDBT Textured Dark Bronze
NLT nLight® dimming pack.	90CRI High CRI (90+)	DBL Matte Black	DBLB Textured Black
NLTER ⁹ nLight® dimming pack for fixtures on emergency circuit	N80 nLight Lumen Compensation	DWH Gloss White	DWHG Textured White
NLTAIR2 nLight® AIR dimming pack.	HAO ¹⁰ HAO High Ambient Option (40°C)	DMB Matte Medium Bronze	DBNH Textured Bronze
NLTAIRER2 ⁹ nLight® AIR dimming pack for fixtures on emergency circuit	WL ¹¹ Wet Location	DNA Gloss Natural Aluminum	DNAT Textured Natural Aluminum
	IP66 ^{11,12} Lensed, IP66 rated	DSS Gloss Sandstone	DSST Textured Sandstone
		DGC Gloss Charcoal Grey	DSPD Textured Dark Grey
		DTG Gloss Tennis Green	DSPE Textured Green
		DBR Gloss Bright Red	DSPH Textured Light Red
		DSB Gloss Steel Blue	DWHAMF Gloss White with Anti-microbial finish
			RALTBD Cylinder RAL # TBD (TBD for pricing only)
			CPC Cylinder Custom Paint Color TBD (TBD for pricing only)

ACCESSORIES — order as separate catalog numbers (shipped separately)

GCOLORS KIT	Architectural colors chip kit, consisting of powder-coat and plated finishes
OPTC4 XXD	Additional optics for field installation. Replace "XX" with beam angle.

ORDERING NOTES

1. Not Available with Finishes.
2. Only available 1500lm and below.
3. Factory supplied step down transformer must be remote mounted. Access required to location of remote mounted device.
4. Refer to [Tech 240](#) for compatible dimmers.
5. Not Available with Control Interfaces.
6. Includes terminator resistor.
7. For indoor use, damp location only.
8. Field installed. Access required to location of remote mounted device.
9. For use with generator supply EM power. Will require an emergency hot feed and normal hot feed.
10. Only available up to 2500 lumens. Not available for WL or ECOS2.
11. Not available with UP. Max: 3000LM.
12. IP66 should be selected if Wet Location is required with UP fixture orientation.
13. For details on RAL and Custom colors please see [Architectural colors](#)

Optical Assembly

Fully serviceable and upgradeable lensed LED light engine suitable for field maintenance or service from below the ceiling. Optical design is a Bounding Ray™ design with 45° cutoff to source and source image. Top down flash characteristic for superior glare control.

Electrical

The luminaire shall operate from a 50 or 60 Hz ± 3 Hz AC line over a voltage ranging from 120 VAC to 277 VAC. Support 347V via remote-mounted stepdown transformer. The fluctuations of line voltage shall have no visible effect on the luminous output.

The luminaire shall have a power factor of 90% or greater at all standard operating voltages and full luminaire output.

Sound Rated A+. Driver shall be >80% efficient at full load across all input voltages.

Input wires shall be 18AWG, 300V minimum solid copper.

Controls

Luminaire shall be equipped with interface for nLight wired or nLight AIR networks with integral power supply as per specification.

Emergency

Luminaires supplied with a battery pack comply with NFPA 101 (Life Safety code) and deliver constant light output throughout the 90 minutes of code required emergency operation period when there is a normal AC power loss.

Luminaires equipped with a generator transfer device work in conjunction with an auxiliary generator or a central inverter system to power fixtures for safe egress lighting.

Dimming

The luminaire shall be capable of continuous dimming without perceivable stroboscopic flicker as measured by flicker index (ANSI/IES RP-16-10) over a range of 100 – 10%, 100 – 1.0% or 100 – 0.1% of rated lumen output with a smooth shut off function to step to 0%.

eldoLED LED drivers shall conform to IEEE P1789 standards. Alternatively, manufacturers must demonstrate conformance with product literature and testing which demonstrates this performance. Systems that do not meet IEEE P1789 will not be considered.

Driver is inaudible in 24dB environment, and stable when input voltage conditions fluctuate over what is typically experienced in a commercial environment.

Construction

Heaving-gauge aluminum construction.

Extruded body with flangeless reflector allows flow-through passive thermal management.

Wall mount for direct installation to 4" recessed or surface octagonal junction box.

Listings

Fixtures are CSA Certified to meet US and Canadian Standards: All fixtures manufactured in strict accordance with the appropriate and current requirements of the "Standards for Safety" to UL, damp location standard; wet location covered ceiling optional (WL).

Luminaire configurations are Energy Star certified through testing in EPA-recognized laboratories, with the results reviewed by an independent, accredited certification organization. Visit www.energystar.gov for specific configurations listed.

Photometrics

LEDs tested to LM-80 standards. Measured by IESNA Standard LM-79-08 in an accredited lab. Lumen output shall not decrease by more than 30% over the minimum operational life of 60,000 hours.

Color appearance from luminaire to luminaire of the same type and in all configurations, shall be consistent both initially and at 6,000 hours and operate within a tolerance of <2.5 MacAdam ellipse as defined by the center of the quadrangles defined in ANSI C78.377-2015.

BUY AMERICAN ACT

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to www.acuitybrands.com/buy-american for additional information.

Warranty

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note:

Actual performance may differ as a result of end user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background*
- This luminaire is part of an A+ Certified solution for nLight® control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background*

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

ICO - eldoLED Driver Default Dimming Curve			
Nomenclature	Min Dimming	Driver Dim Curve	Control Dim Curve
EZ10	10%	Linear	Linear/Logarithmic
EZ1	1%	Linear	Linear/Logarithmic
EZB	<1%	Logarithmic	Linear
EDAB	<1%	Logarithmic*	Linear
EDXB	<1%	Square	Linear

*Changable through DALI controller

J-box Compatibility Matrix		Cylinder Configurations	
		JBX	JBX w/EDXB Driver
Recommended J-box (by others)	4" Octagonal 4x4x1.5 deep"	✓	✗
	4" Octagonal 4x4x2.125 deep	✓	✓
	4" Square 4x4x1.5 deep	✓	✗

Driver		Control Provided (note: 347V/UVOLT versions provided with 347 option selected)			
Nomenclature	Description	NLT	NLTER	NLTAIR2	NLTAIRER2
GZ10	0-10V driver dims to 10%	nPP16 D EFP	nPP16 D ER EFP	RPP20 D 24V G2	RPP20 D 24V ER G2
GZ1	0-10V driver dims to 1%	nPP16 D EFP	nPP16 D ER EFP	RPP20 D 24V G2	RPP20 D 24V ER G2
EZ10	eldoLED 0-10V ECOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2
EZ1	eldoLED 0-10V ECOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2
EZB	eldoLED 0-10V SOLOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2


Standard Architectural Color Options for Cylinder Bodies

 DSS LITHONIA P12 Sandstone	 DSST TEXTURED P90 Sandstone	 DBR LITHONIA P34 Bright Red	 DSPH TEXTURED P80 Light Red	 DMB LITHONIA P11 Medium Bronze	 DBNH TEXTURED P74 Bronze	 DTG LITHONIA P33 Tennis Green	 DSPE TEXTURED P78 Green
 DSB LITHONIA P49 Steel Blue	 DNA LITHONIA P07 Natural Aluminum	 DNAT TEXTURED P89 Natural Aluminum	 DGC LITHONIA P32 Charcoal Gray	 DSPD TEXTURED P77 Dark Grey	 DDB LITHONIA P50 Dark Bronze	 DDBT TEXTURED P88 Dark Bronze	 DBL LITHONIA P13 Black
 DBLB TEXTURED P75 Black	 DWH LITHONIA P21 White	 DWHG TEXTURED P86 White					


NOTE: These colors were carefully reproduced to give as true a depiction as possible of finished product color. Some colors, however, may vary slightly from actual appearance due to display/printing variations and limitations. Please always contact a Lithonia representative for an accurate paint chip sample.



JBX Recessed J-Box

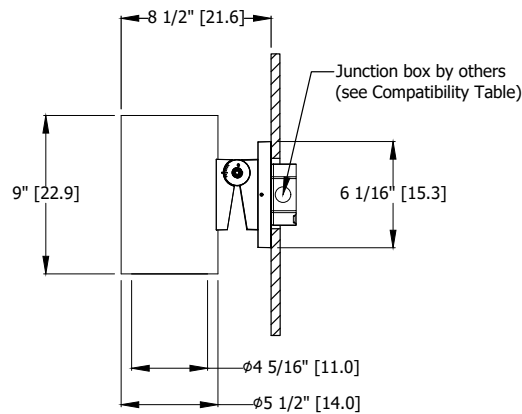


Luminaire can be specified as uplight or downlight



Tilt: 40°




JBX Surface J-Box

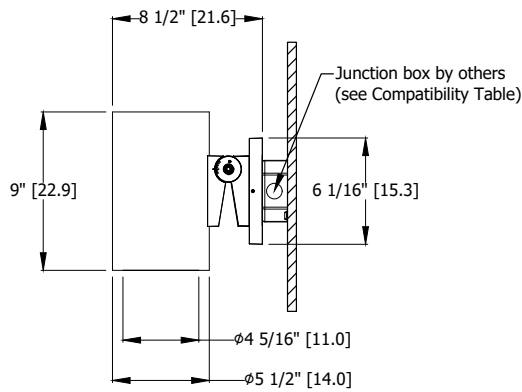


Luminaire can be specified as uplight or downlight

JBXCC Surface J-Box with Conduit Covers

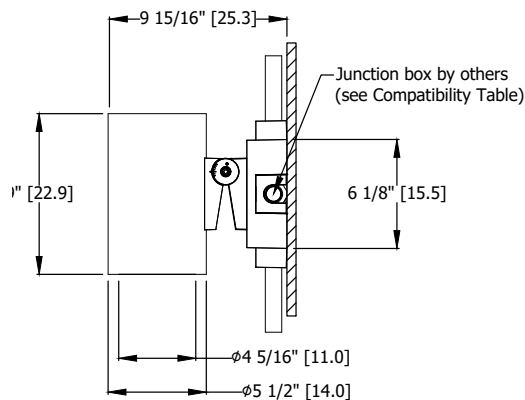


Luminaire can be specified as uplight or downlight





Tilt: 40°

*Dimensions in inches [centimeters]

Tilt and Rotate Range




Tilt range: -20° to 40°




Rotation range: -40° to 40°

Junction Box Dimensions (by others)

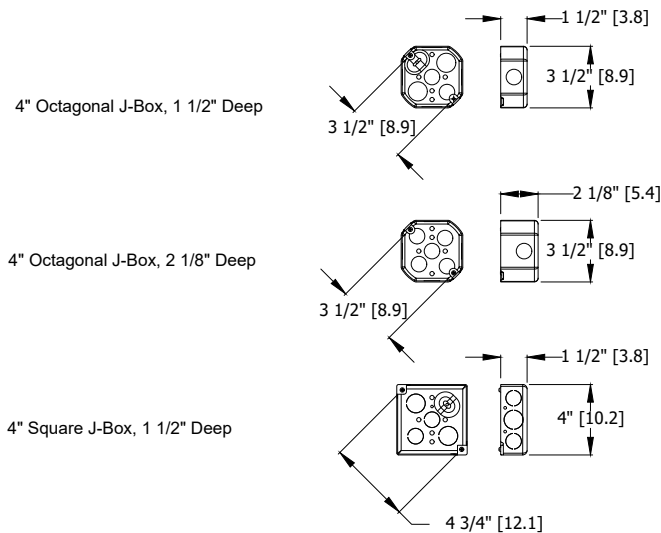


347V Stepdown Transformer

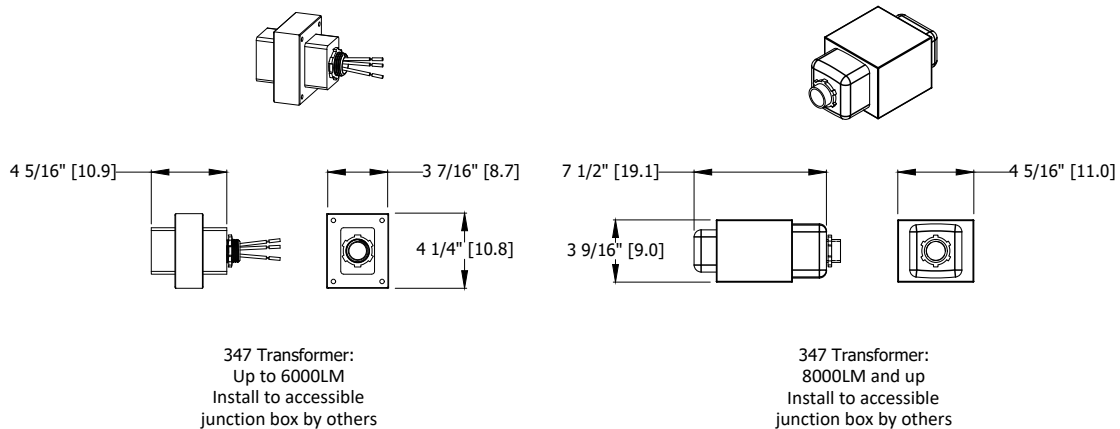


*Dimensions in inches [centimeters]

CONSULT WWW.GOTHAMLIGHTING.COM FOR ADDITIONAL PHOTOMETRY.


ICO4WTRC 35/15 AR LSS 15D Input Watts: 15.1, Delivered Lumens: 1504, LPW: 99.6, S/MH: 0.24, Test No: ISF 192654P6764

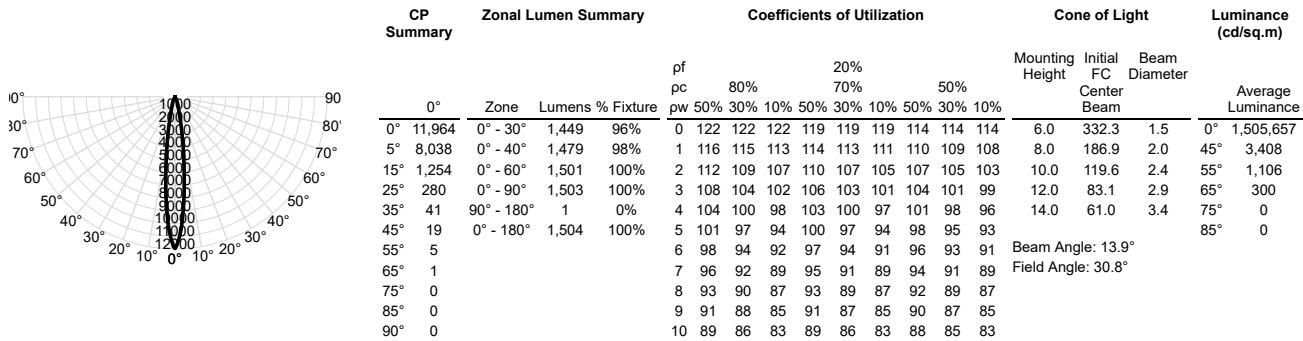


ICO4WTRC 35/15 AR LSS 30D Input Watts: 15.1, Delivered Lumens: 1411, LPW: 93.4, S/MH: 0.47, Test No: ISF 192657P6764

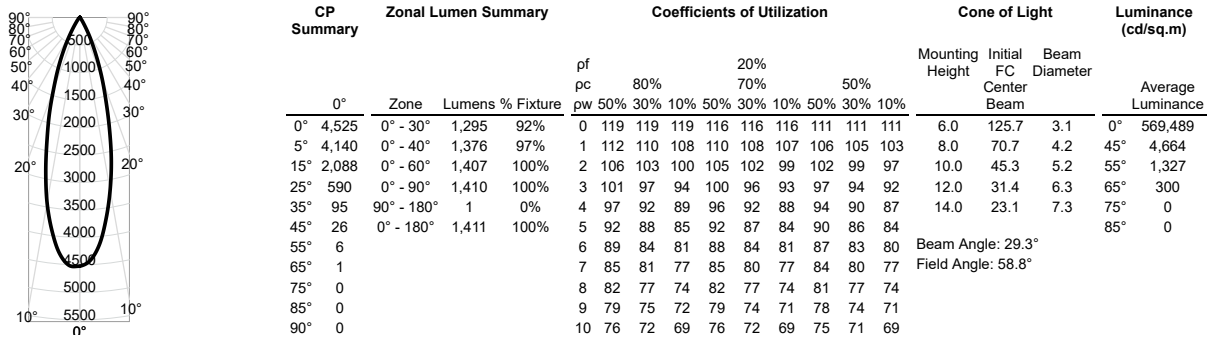

ICO4WTRC 35/15 AR LSS 45D Input Watts: 15.1, Delivered Lumens: 1437, LPW: 95.2, S/MH: 0.73, Test No: ISF 192660P6103

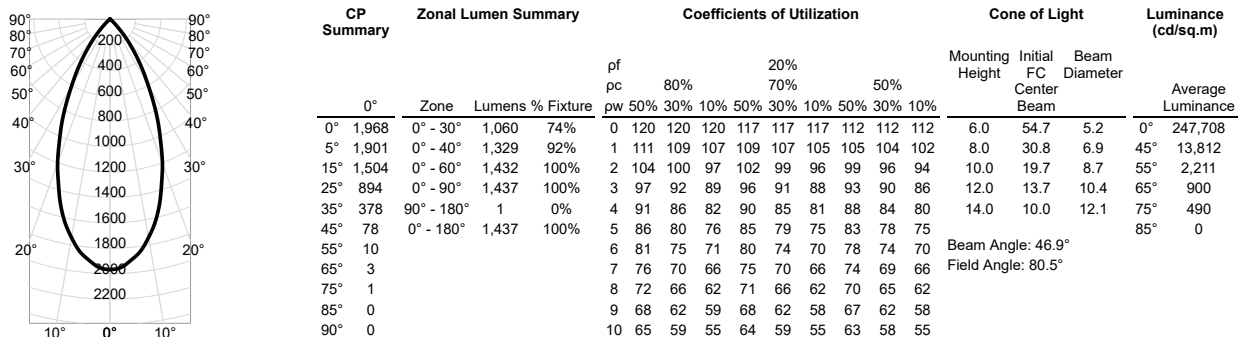

ICO4WTRC 35/15 AR LSS 65D Input Watts: 15.1, Delivered Lumens: 1382, LPW: 91.5, S/MH: 0.98, Test No: ISF 192663P6764

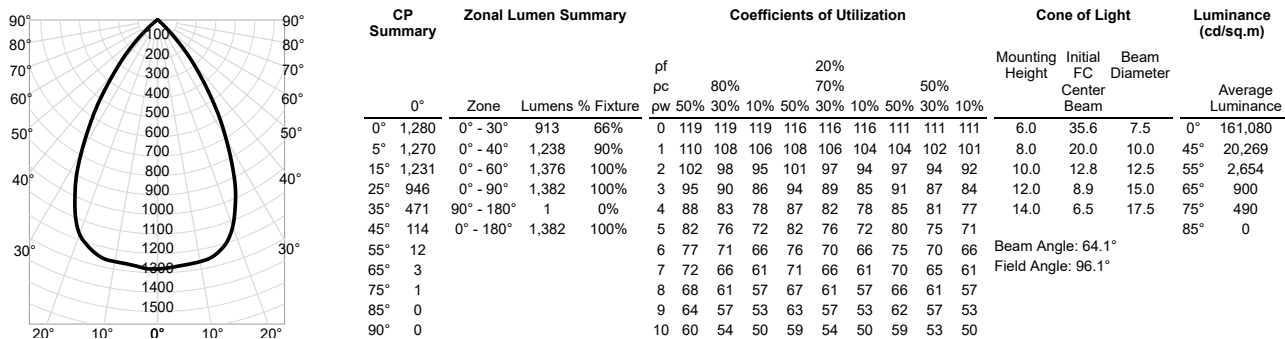

Photometry

Lumen Output Multiplier		
CRI	CCT	Multiplier
80	2700K	0.916
	3000K	0.948
	3500K	1
	4000K	1.032
	5000K	1.1
90	2700K	0.748
	3000K	0.8
	3500K	0.838
	4000K	0.845
	5000K	0.945

Reflector Finish Multiplier	
Reflector Finish	Multiplier
LS - Specular	1
LSS - Semi Specular	0.956
WR - White	0.87
LD - Matte Diffuse	0.85
BR - Black	0.73
BZR - Bronze	0.73

nLight® AIR is the ideal solution for retrofit or new construction spaces where adding communication wiring is cost prohibitive. The integrated nLight AIR rPP20 Power Pack is part of each EVO Luminaire ordered with the NLTAIR option. These individually addressable controls offer the ultimate in flexibility during initial setup and for space repurposing.

nLight® AIR Control Accessories

Order as separate catalog number. Visit [nLight AIR](#).

Wall Switches

Model Number	
On/Off single pole	rPODB (color) G2
On/Off two pole	rPODB 2P (color) G2
On/Off & raise/lower single pole	rPODB DX (color) G2
On/Off & raise/lower two pole	rPODB 2P DX (color) G2


nLight® AIR Control Accessories (cont.)

Occupancy Sensors (PIR/dual tech)



Model Number	
Small motion 360°, ceiling	rCMS 9 / rCMS PDT 9
Large motion 360°, ceiling	rCMS 10 / rCMS PDT 10

Possibilities for nLight® AIR

Fixtures ordered *without* the NLTAIR option

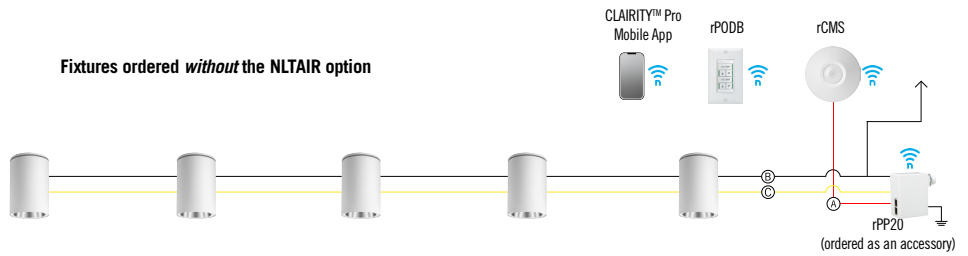

Fixtures ordered *with* the NLTAIR option

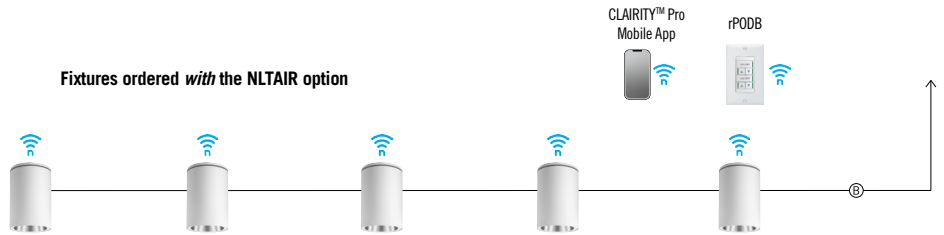

nLight® Wired The nLight® solution is a digital networked lighting control system that provides both energy savings and increased user configurability by cost effectively integrating time-based, daylight-based, sensor-based and manual lighting control schemes.

nLight® Wired Control Accessories

Order as separate catalog number. Visit [nLight](#).

Wall Switches

Model Number	
On/Off single pole	nPODM (XX)
On/Off two pole	nPODM 2P (XX)
On/Off & raise/lower single pole	nPOD DX (XX)
On/Off & raise/lower two pole	nPODM 2P DX (XX)
Graphic touchscreen	nPOD GFX (XX)

Photocell Controls

Dimming	nCM ADCX
---------	----------

nLight® Wired Control Accessories (cont.)

Occupancy Sensors (PIR/dual tech)


Model Number	
Small motion 360°, ceiling	nCM 9 / nCM PDT 9
Large motion 360°, ceiling	nCM 10 / nCM PDT 10
Wide View	nWV 16 / nWV PDT 16
Wall switch with raise/lower	nWSX LV DX / nWSX PDT LV DX

Cat-5 Cables (plenum rated)

10', CAT5	CAT5 10FT J1
15', CAT5	CAT5 15FT J1

Possibilities for nLight® wired

Fixtures ordered *without* the NLT option

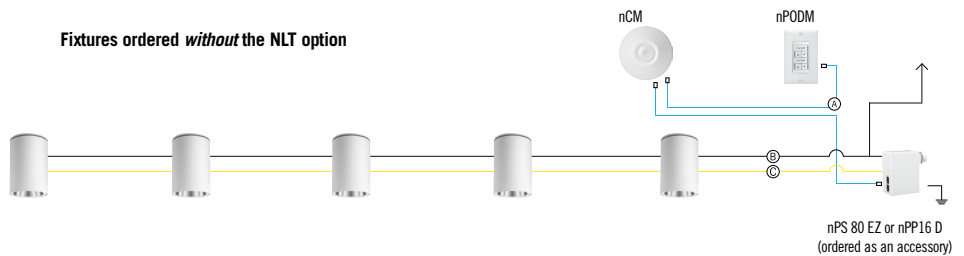

Fixtures ordered *with* the NLT option

