


OVERVIEW

General Illumination Square Shower Downlight with nTune

6"

Feature Set

- Tunable White solution that reproduces natural light patterns and colors, complements materials, and supports productivity.
- Rhythm Range (2700K-6500K) follows the cycle of daylight
- Productivity Range (3000K-5000K) to re-energize and inspire, ideal for collaboration
- WARMDIM® Range (3000K-1800K) for relaxing; warm and comfortable when dimmed
- Non-conductive dead-front trim
- Flush or regressed lensed trim with antimicrobial finish for wipe-down areas
- Rated 65,000 hours (L80) at 25°C ambient temperature
- Dim to Dark 100% - 0.1%

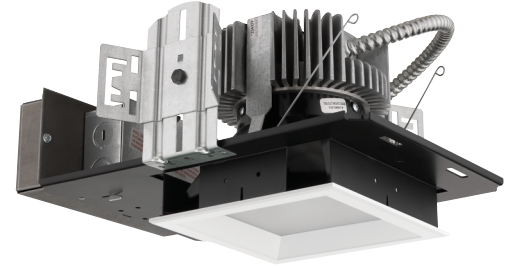

Distribution



Superior Performance

Nominal lumens	750	1000	1500	2000	2500	3000	3500	4000	4500
Delivered	776	1058	1445	1864	2220	2663	3053	3565	3769
Wattage	11	14	19	24	29	34	40	48	50
Efficacy	74	77	77	78	78	78	77	75	75

*80 CRI, 3500K

COMPLEMENTARY PRODUCTS

Coordinated Apertures | Multiple Layers of Light



General Illumination Layer | EVO



High Center Beam Layer | Incito



EVO + Incito — Multiple Layers of Light

Core								
	Downlight	Adjustable	Open Wallwash	Lensed Wallwash	Cylinder	Pinhole	Bevel	Hyperbolic
Healthcare								
	MRI	Surgical Suite	Patient Room					
Special Applications								
	Dynamic	Food Service	Vandal/Tamper	Clean Room	Shower	Steam Room		

A+ Capable options indicated by this color background.

Luminaire Type:

Catalog Number:

EXAMPLE: EVO6SQSH TUWH PROR/10 DFFAMF SOL MVOLT NLT

Series	Dynamic Feature	Dynamic Range ¹	Nominal lumens values ²	Reflector/Lens Setting/Flange Color	Lens
EVO6SQSH 6" Square Patient Downlight	TUWH Tunable White WDIM Warm Dimming	PROR Productivity Range (3000K-5000K) RHYR Rhythm Range (2700K-6500K)	/10 1000 lumens	DFR Regressed lensed white trim DFF Flush lensed white trim DFRAMF Regressed lensed white trim with antimicrobial finish DFFAMF Flush lensed white trim with antimicrobial finish	SOL Textured Lens SMO Smooth Lens
			/15 1500 lumens		
			/20 2000 lumens		
			/25 2500 lumens		
			/30 3000 lumens		

Voltage	Control Interface Type	Options
MVOLT Multi-Volt 120 120V 277 277V	NLT³ nLight nTune interface NLTER³ nLight nTune interface with emergency circuit ZT 0-10V dimming DALI DALI logarithmic dimming to <1%.	SF Single fuse. Specify 120V or 277V. E10WCPR⁴ Emergency battery pack, 10W Constant Power, CA Title 20 compliant with remote test switch BGTD Bodine generator transfer device

ACCESSORIES — order as separate catalog numbers (shipped separately)

FCS 7TSN XXX	Fresco Lighting Control; XXX = Color. Refer to FRESCO spec sheet for additional options.
nPODM 2P DX CCT XX	nLight 2 Channels, On/off + raise/lower control, CCT, XX = Color
nPODM 4S DX XX	nLight 4 Scene Control, On/off + raise/lower control, XX = Color
nPODM 4S XX	nLight 4 Scene Control, XX = Color

ORDERING NOTES

1. PROR and RHYR available only with TUWH. HALR available only with WDIM.
2. Nominal lumen values when tested at 3500K.
3. Requires power from nLight network bridge or nPS 80.
4. Voltage specific (120V or 277V). Not available with battery pack options.

Optical Assembly

Fully serviceable and upgradeable lensed LED light engine suitable for field maintenance or service from below the ceiling. Unitized optics shall have mechanical attachment of the light engine to the lower reflector for complete optical alignment.

Electrical

The luminaire shall operate from a 50 or 60 Hz ±3 Hz AC line over a voltage ranging from 120 VAC to 277 VAC. The fluctuations of line voltage shall have no visible effect on the luminous output.

The luminaire shall have a power factor of 90% or greater at all standard operating voltages and full luminaire output.

Sound Rated A+. Driver shall be >80% efficient at full load across all input voltages.

Input wires shall be 18AWG, 300V minimum, solid copper.

Controls

Tunable white nTune™ is an all-digital light color temperature control within an nLight enabled luminaire.

nTune™ allows color temperature settings through the Productivity Range of 3000K to 5000K or Rhythm Range of 2700K to 6500K.

Refer to nLight Programming User's Guide for instructions on customizing your application with SensorView™.

Dimming

The luminaire shall be capable of continuous dimming without perceivable stroboscopic flicker as measured by flicker index (ANSI/IES RP-16-10) over a range of 100 – 0.1% of rated lumen output with a smooth shut off function to step to 0%.

Construction

Luminaire housing shall be constructed of 16-gauge galvanized steel and have preinstalled telescopic mounting bars with maximum 32" and minimum 15" extension and 4" vertical adjustment.

Luminaires shall be suitable for installation in ceilings up to 1½" thick. (specify ceiling thickness adapter to extend frame to accommodate ceiling thickness up to 5").

Tool-less adjustments shall be possible after installation.

The assembly and manufacturing process for the luminaire shall be designed to assure all internal components are adequately supported to withstand mechanical shock and vibration.

25°C ambient temperature standard (1/2" clearance on all sides from non-combustible materials in non-IC applications, unless marked spacing noted otherwise).

For use in insulated ceilings, a 3" clearance on all sides from insulation is required (unless marked spacing noted otherwise).

Listings

Fixtures are CSA certified to meet US and Canadian Standards: All fixtures manufactured in strict accordance with the appropriate and current requirements of the "Standards for Safety" to UL, wet location covered ceiling.

Photometrics

LEDs tested to LM-80 standards. Measured by IESNA Standard LM-79-08 in an accredited lab. Lumen output shall not decrease by more than 20% over the minimum operational life of 60,000 hours.

Buy American Act

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to www.acuitybrands.com/buy-american for additional information.

Warranty

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/customer-support/terms-and-conditions

Note:

Actual performance may differ as a result of end user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background*
- This luminaire is part of an A+ Certified solution for nLight® control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background*

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

DFF SMO - Flush Clear									
Nominal Lumens	750	1000	1500	2000	2500	3000	3500	4000	4500
Delivered	776	1058	1445	1864	2220	2663	3053	3565	3769
Wattage	11	14	19	24	29	34	40	48	50
Efficacy	74	77	77	78	78	78	77	75	75

*Lumen output for 80CRI - 3500K

DFF SOL - Flush Textured									
Nominal Lumens	750	1000	1500	2000	2500	3000	3500	4000	4500
Delivered	578	789	1078	1390	1655	1986	2276	2658	2811
Wattage	10	14	19	24	28	34	40	48	50
Efficacy	56	57	58	58	59	58	57	56	56

*Lumen output for 80CRI - 3500K

DFR SMO - Regressed Clear									
Nominal Lumens	750	1000	1500	2000	2500	3000	3500	4000	4500
Delivered	636	868	1186	1529	1821	2185	2504	2925	3092
Wattage	10	14	19	24	28	34	40	48	50
Efficacy	61	63	64	64	65	64	63	61	61


*Lumen output for 80CRI - 3500K

DFR SOL - Regressed Textured									
Nominal Lumens	750	1000	1500	2000	2500	3000	3500	4000	4500
Delivered	578	789	1078	1390	1655	1986	2276	2658	2811
Wattage	10	14	19	24	28	34	40	48	50
Efficacy	56	57	58	58	59	58	57	56	56

*Lumen output for 80CRI - 3500K

Driver Default Dimming Curve			
Nomenclature	Min Dimming	Driver Dim Curve	Control Dim Curve
ZT	0.1%	Linear	Linear/Logarithmic
DALI	0.1%	Linear	Linear/Logarithmic

MAINSTREAM DYNAMIC TUNABLE WHITE WITH NTUNE TECHNOLOGY

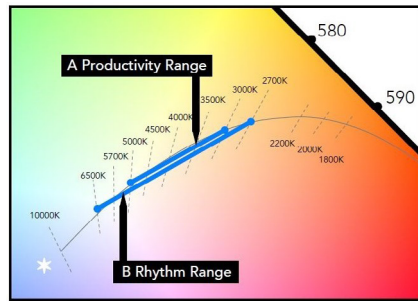


- A** Productivity Range 3000K to 5000K
- B** Rhythm Range 2700K to 6500K

Tunable white nTune™ is an all digital light color temperature control within an nLight enabled luminaire. This brings tunable white lighting control into the mainstream with repeatable, consistent results in an economical luminaire form and system already familiar to schools. Designers and facility operators are granted the freedom to tie scenes to specific activities or to complement colors or materials within a visual environment. nTune™ allows color temperature settings through the Productivity Range of 3000K to 5000K or Rhythm Range of 2700K to 6500K. Refer to nLight Programming User's Guide for instructions on customizing to your application with SensorView™.

TUNABLE WHITE GPHD

- Gamut:** One dimensional warm-Cool
- Path:** Direct 3000K to 5000K (Productivity Range) or 2700K to 6500K (Rhythm Range)
- Handle:** Two Natural Language Handles: Intensity and CCT
- Data:** nLight with nTune technology for both handles of control

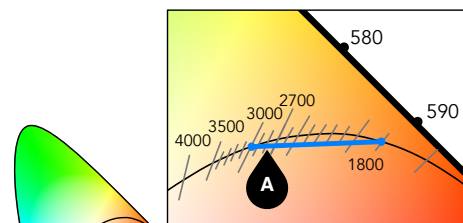

- A** Halogen Range 3000K to 1800K


How to Estimate Delivered Lumens in Emergency Mode
Delivered Lumens = 1.25 x P x LPW
P = Output power of emergency driver. P = 10W for PS1055CP
LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.

DIMENSIONAL DATA


*Dimensions in inches [centimeters]

Aperture: 6 1/4" [15.9] Ceiling Opening: 7 1/8" [18.1] self-flanged
 Overlap Trim: 7 1/2" [19.1]


Standard

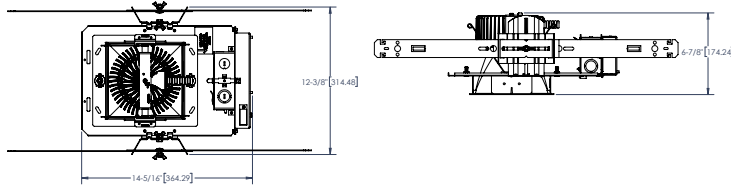

Battery Pack

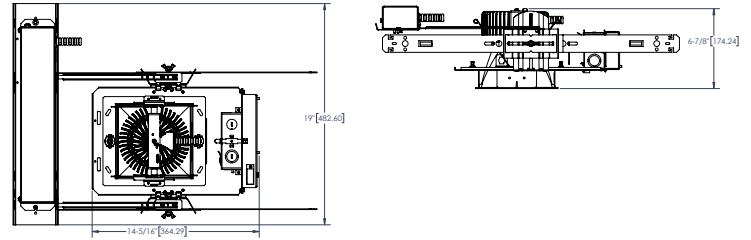


CP Standard

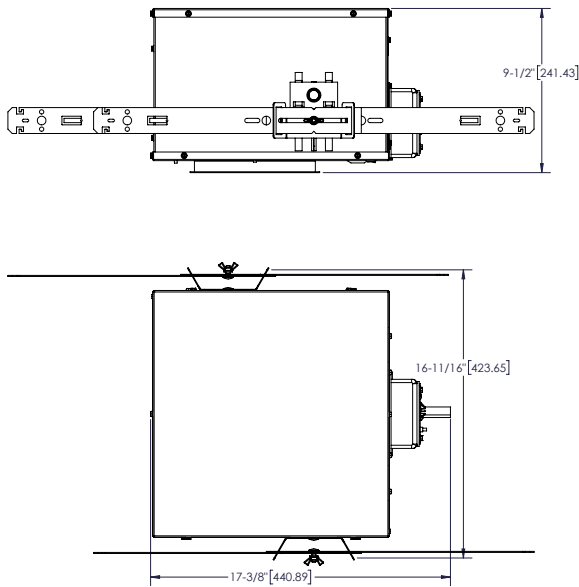



nLight® Wired The nLight® solution is a digital networked lighting control system that provides both energy savings and increased user configurability by cost effectively integrating time-based, daylight-based, sensor-based and manual lighting control schemes.

Possibilities for nLight® wired

Fixtures ordered *without* the NLT option

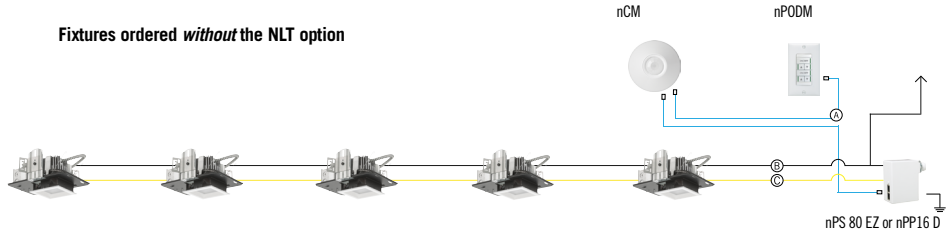

Fixtures ordered *with* the NLT option

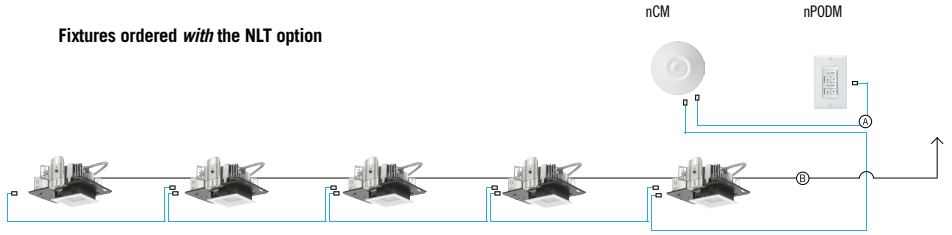

nLight® Wired Control Accessories

Order as separate catalog number. Visit [nLight](http://nLight.com).

Wall Switches	Model Number
On/Off single pole	nPODM XX
On/Off two pole	nPODM 2P XX
On/Off & raise/lower single pole	nPOD DX XX
On/Off & raise/lower two pole	nPODM 2P DX XX
Graphic touchscreen	nPOD GFX XX
Photocell Controls	
Dimming	nCM ADCX

nLight® Wired Control Accessories (cont.)

Occupancy Sensors (PIR/dual tech)	Model Number
Small motion 360°, ceiling	nCM 9 / nCM PDT 9
Large motion 360°, ceiling	nCM 10 / nCM PDT 10
Wide View	nWV 16 / nWV PDT 16
Wall switch with raise/lower	nWSX LV DX / nWSX PDT LV DX
Cat-5 Cables (plenum rated)	
10', CAT5	CAT5 10FT J1
15', CAT5	CAT5 15FT J1