



D-Series Size 0

Amber Series



LED Area Luminaire



d^{series}

Specifications

EPA:	0.44 ft ² (0.04 m ²)
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)



Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in Amber LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting.

Ordering Information

EXAMPLE: DSX0 LED P6 AMBPC AMCRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX0 LED												
Series	LEDs	Color temperature ²		Color Rendering Index ²	Distribution		Voltage	Mounting				
DSX0 LED	Forward optics	AMBLW	Limited Wavelength Amber	AMCRI	AFR	Automotive front row	T5M	Type V medium	MVOLT	(120V-277V) ⁴	Shipped included	
	P1 P5	AMBPC	Phosphor Converted Amber		T1S	Type I short	T5LG	Type V low glare	HVOLT	(347V-480V) ^{5,6}		
	P2 P6				T2M	Type II medium	T5W	Type V wide	XVOLT	(277V-480V) ^{7,8}		
	P3				T3M	Type III medium	BLC3	Type III backlight control ³	RPA	Round pole mounting (#8 drilling, 3" min. RND pole)		
	P4				T3LG	Type III low glare ³	BLC4	Type IV backlight control ³				
	Rotated optics				T4M	Type IV medium	LCCO	Left corner cutoff ³				
	P10 ¹ P12 ¹				T4LG	Type IV low glare ³	RCCO	Right corner cutoff ³		SPA5		Square pole mounting (#5 drilling, 3" min. SQ pole) ⁹
	P11 ¹				TFTM	Forward throw medium	RPA5	Round pole mounting (#5 drilling, 3" min. RND pole) ⁹				
					SPA8N	Square narrow pole mounting (#8 drilling, 3" min. SQ pole)						
					WBA	Wall bracket ¹⁰						
					MA	Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)						

Control options	Other options	Finish (required)
Shipped installed NLTAIR2 PIRHN nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc ^{11, 12, 18, 19} PIR High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc ^{13, 18, 19} PER NEMA twist-lock receptacle only (controls ordered separately) ¹⁴ PER5 Five-pin receptacle only (controls ordered separately) ^{14, 19}	PER7 Seven-pin receptacle only (controls ordered separately) ^{14, 19} FAO Field adjustable output ^{15, 19} BL30 Bi-level switched dimming, 30% ^{16, 19} BL50 Bi-level switched dimming, 50% ^{16, 19} DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) ¹⁷ Shipped installed HS Houseside shield (black finish standard) ²⁰ L90 Left rotated optics ¹ R90 Right rotated optics ¹ CCE Coastal Construction ²¹ Shipped separately EGSR External Glare Shield (reversible, field install required, matches housing finish) BSDB Bird Spikes (field install required)	DDBXD Dark Bronze DBLXD Black DNAXD Natural Aluminum DWHXD White DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED AMBER
Rev. 03/26/24
Page 1 of 10

Ordering Information

Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ²²
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ²²
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ²²
DSHORT SBK	Shorting cap ²²
DSX0HS P#	House-side shield (enter package number P1-6, P10-12 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0BDB (FINISH)	Bird spike deterrent bracket (specify finish)


NOTES

- Rotated optics available with packages P10, P11 and P12. Must be combined with option L90 or R90.
- AMBLW only available in package P1, P4 and P10. AMCRI must be specified with AMBLW or AMBPC.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- XVOLT not available in packages P1, P2 or P10.
- SPA5 and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- WBA cannot be combined with Type 5 distributions plus photocell (PER).
- NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT.
- PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT.
- PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG.
- DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- Reference Motion Sensor Default Settings table on page 4 to see functionality.
- Reference Controls Options table on page 4.
- Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- CCE option not available with option BSDB and EGSR. Contact Technical Support for availability.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.

Shield Accessories




External Glare Shield (EGSR)




House Side Shield (HS)

Drilling

HANDHOLE ORIENTATION (from top of pole)

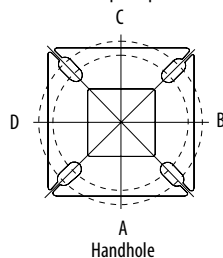

Handhole

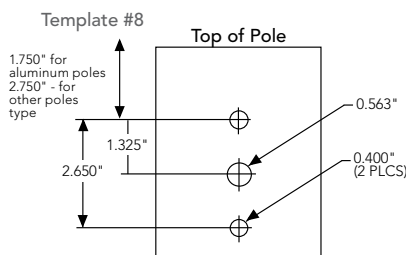

Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPA5	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

DSX0 Area Luminaire - EPA

*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPA5, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93
















Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [homepage](#).


Isofootcandle plots for the DSX0 LED P6 AMBPC AMCRI. Distances are in units of mounting height (15').

LEGEND


- 0.1 fc
- 0.5 fc
- 1.0 fc



AMBPC - Phosphor Converted Amber

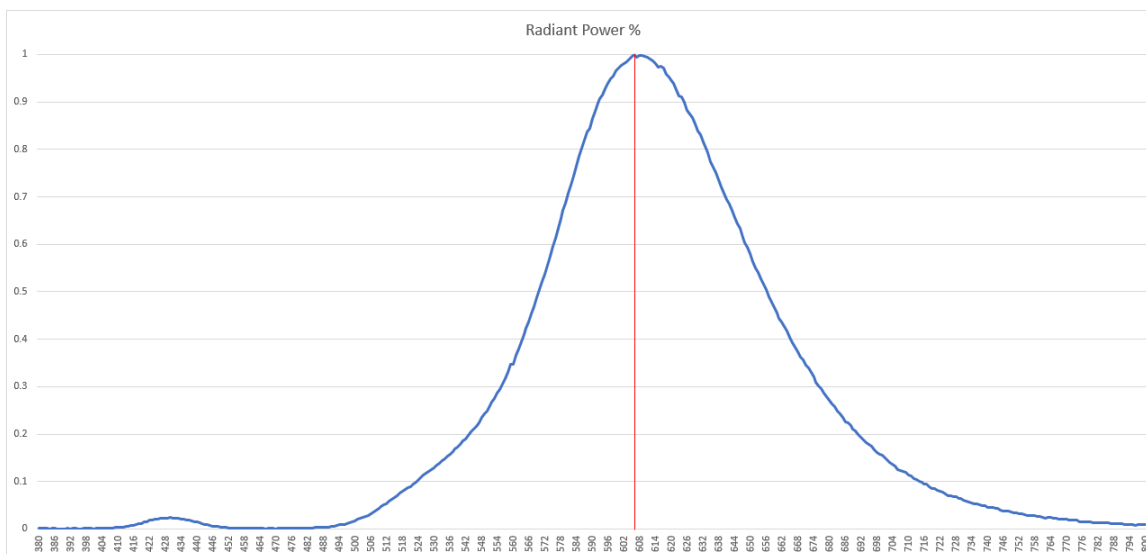

AMBLW - True Limited Wavelength Amber

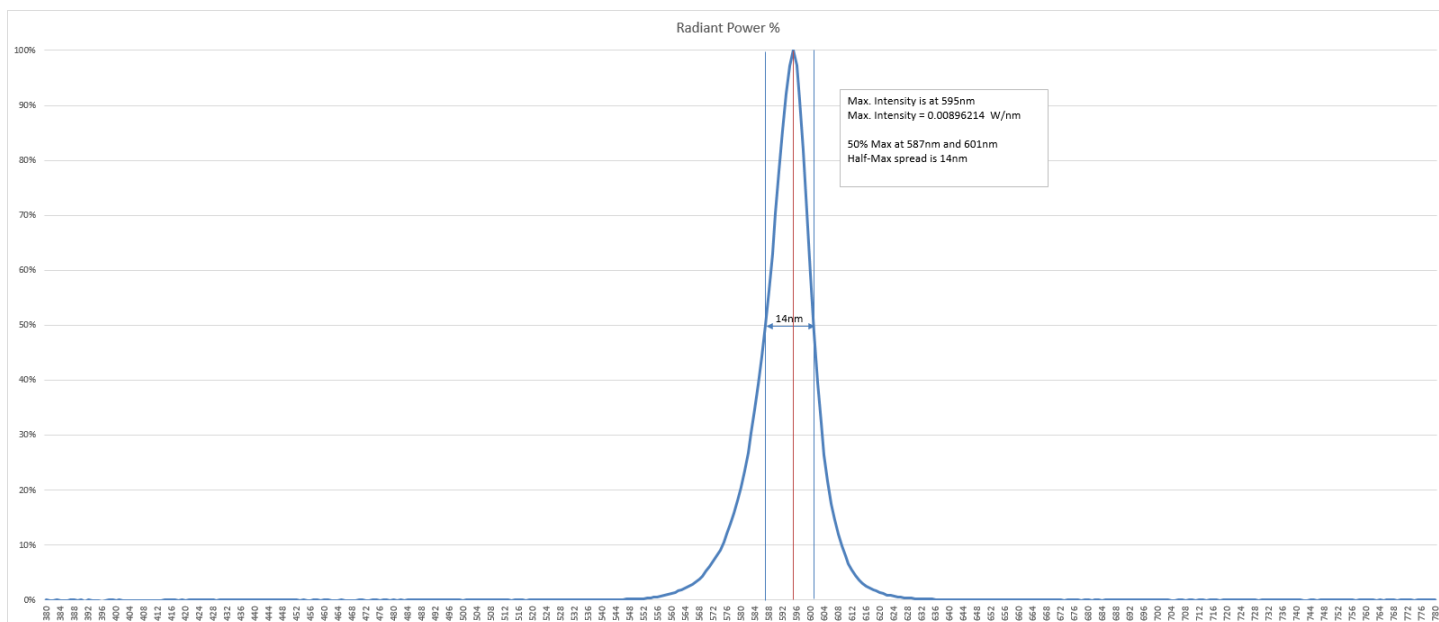

Performance Data

FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

Electrical Load - AMBPC (Phosphor Converted Amber)

					Current (A)					
	Performance Package	LED Count	Drive Current (mA)	Wattage	120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	35	0.29	0.17	0.14	0.13	0.10	0.07
	P2	20	700	46	0.39	0.22	0.19	0.17	0.13	0.10
	P3	20	1050	71	0.59	0.34	0.30	0.26	0.20	0.15
	P4	40	530	69	0.57	0.33	0.29	0.25	0.20	0.14
	P5	40	700	91	0.76	0.44	0.38	0.33	0.26	0.19
	P6	40	1050	139	1.16	0.67	0.58	0.50	0.40	0.29
Rotated Optics (Requires L90 or R90)	P10	30	530	52	0.43	0.25	0.22	0.19	0.15	0.11
	P11	30	700	69	0.58	0.33	0.29	0.25	0.20	0.14
	P12	30	1050	106	0.88	0.51	0.44	0.38	0.30	0.22

Electrical Load - AMBLW (Limited Wavelength Amber)

					Current (A)					
	Performance Package	LED Count	Drive Current (mA)	Wattage	120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	27	0.23	0.13	0.11	0.10	0.08	0.06
	P4	40	530	55	0.46	0.26	0.23	0.20	0.16	0.11
Rotated Optics (Requires L90 or R90)	P10	30	530	41	0.34	0.20	0.17	0.15	0.12	0.08

Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

FORWARD OPTICS

Performance Package	LED Count	Drive Current (mA)	Distribution Type	AMBPC (Phosphor Converted)							AMBLW (Limited Wavelength)					
				System Watts	Lumens	B	U	G	LPW		System Watts	Lumens	B	U	G	LPW
P1	20	530	T1S	35W	3,118	1	0	1	90		27W	1,359	0	0	1	50
			T2M		2,889	1	0	1	83			1,259	0	0	1	46
			T3M		2,922	1	0	2	84			1,273	0	0	1	46
			T3LG		2,610	1	0	1	75			1,138	0	0	1	42
			T4M		2,966	1	0	2	85			1,292	0	0	1	47
			T4LG		2,697	0	1	1	78			1,176	0	1	1	43
			TFTM		2,986	1	0	2	86			1,301	0	0	1	47
			T5M		3,051	2	0	1	88			1,330	1	0	0	49
			T5W		3,101	3	0	1	89			1,351	1	0	1	49
			T5LG		3,060	1	0	0	88			1,334	1	0	0	49
			BLC3		2,125	0	0	1	61			926	0	0	0	34
			BLC4		2,195	0	0	1	63			957	0	0	1	35
			RCCO		2,145	0	0	1	62			935	0	0	1	34
			LCCO		2,145	0	0	1	62			935	0	0	1	34
			AFR		3,118	1	0	1	90			1,359	0	0	1	50
P2	20	700	T1S	46W	3,912	1	0	1	84							
			T2M		3,624	1	0	2	78							
			T3M		3,666	1	0	2	79							
			T3LG		3,275	1	0	1	71							
			T4M		3,720	1	0	2	80							
			T4LG		3,384	1	2	1	73							
			TFTM		3,746	1	0	2	81							
			T5M		3,828	3	0	1	82							
			T5W		3,890	3	0	1	84							
			T5LG		3,839	2	0	0	83							
			BLC3		2,666	0	0	1	57							
			BLC4		2,754	0	0	2	59							
			RCCO		2,690	0	0	1	58							
			LCCO		2,690	0	0	1	58							
			AFR		3,912	1	0	1	84							
P3	20	1050	T1S	71W	5,257	1	0	1	74							
			T2M		4,870	1	0	2	69							
			T3M		4,927	1	0	2	70							
			T3LG		4,401	1	0	1	62							
			T4M		5,000	1	0	2	71							
			T4LG		4,548	1	2	1	64							
			TFTM		5,035	1	0	2	71							
			T5M		5,145	3	0	1	73							
			T5W		5,228	3	0	2	74							
			T5LG		5,159	2	0	1	73							
			BLC3		3,584	0	0	1	51							
			BLC4		3,701	0	0	2	52							
			RCCO		3,616	0	0	1	51							
			LCCO		3,616	0	0	1	51							
			AFR		5,257	1	0	1	74							

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

FORWARD OPTICS

Performance Package	LED Count	Drive Current (mA)	Distribution Type	AMBPC (Phosphor Converted)							AMBLW (Limited Wavelength)					
				System Watts	Lumens	B	U	G	LPW		System Watts	Lumens	B	U	G	LPW
P4	40	530	T1S	69W	6,120	1	0	1	89		55W	2,471	0	0	1	45
			T2M		5,669	1	0	2	83			2,289	1	0	1	42
			T3M		5,735	1	0	3	83			2,316	1	0	1	42
			T3LG		5,123	1	0	1	75			2,069	0	0	1	38
			T4M		5,821	1	0	3	85			2,350	1	0	2	43
			T4LG		5,294	1	2	1	77			2,138	0	1	1	39
			TFTM		5,861	1	0	3	85			2,367	1	0	1	43
			T5M		5,989	3	0	1	87			2,418	2	0	1	44
			T5W		6,086	3	0	2	89			2,457	2	0	1	45
			T5LG		6,006	2	0	1	87			2,425	1	0	0	44
			BLC3		4,172	0	0	2	61			1,685	0	0	1	31
			BLC4		4,309	0	0	2	63			1,740	0	0	1	32
			RCCO		4,209	0	0	2	61			1,700	0	0	1	31
			LCCO		4,209	0	0	2	61			1,700	0	0	1	31
			AFR		6,120	1	0	1	89			2,471	0	0	1	45
P5	40	700	T1S	91W	7,549	1	0	2	84							
			T2M		6,993	1	0	3	77							
			T3M		7,075	1	0	3	77							
			T3LG		6,319	1	0	1	69							
			T4M		7,180	1	0	3	79							
			T4LG		6,530	1	2	2	71							
			TFTM		7,230	1	0	3	79							
			T5M		7,387	3	0	2	81							
			T5W		7,507	3	0	2	82							
			T5LG		7,409	3	0	1	81							
			BLC3		5,146	0	0	2	56							
			BLC4		5,315	0	0	2	58							
			RCCO		5,192	0	0	2	57							
			LCCO		5,192	0	0	2	57							
			AFR		7,549	1	0	2	84							
P6	40	1050	T1S	139W	9,665	1	0	2	70							
			T2M		8,953	2	0	3	65							
			T3M		9,057	2	0	3	65							
			T3LG		8,090	1	0	2	58							
			T4M		9,192	2	0	3	66							
			T4LG		8,360	1	2	2	60							
			TFTM		9,256	2	0	3	67							
			T5M		9,457	4	0	2	68							
			T5W		9,611	4	0	2	69							
			T5LG		9,485	3	0	1	68							
			BLC3		6,588	0	0	2	47							
			BLC4		6,804	0	0	3	49							
			RCCO		6,647	1	0	2	48							
			LCCO		6,647	1	0	2	48							
			AFR		9,665	1	0	2	70							

Performance Data


Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



ROTATED OPTICS

Performance Package	LED Count	Drive Current (mA)	Distribution Type	AMBPC (Phosphor Converted)							AMBLW (Limited Wavelength)					
				System Watts	Lumens	B	U	G	LPW		System Watts	Lumens	B	U	G	LPW
P10	30	530	T1S	52W	4,633	2	0	2	90		41W	1,714	1	0	1	42
			T2M		4,292	3	0	3	83			1,588	1	0	1	39
			T3M		4,341	3	0	3	84			1,606	1	0	1	40
			T3LG		3,878	2	0	2	75			1,435	1	0	1	35
			T4M		4,406	3	0	3	85			1,630	1	0	1	40
			T4LG		4,007	2	0	2	77			1,483	1	0	1	37
			TFTM		4,437	3	0	3	86			1,642	1	0	1	40
			T5M		4,533	3	0	1	88			1,677	1	0	1	41
			T5W		4,606	3	0	1	89			1,705	2	0	1	42
			T5LG		4,546	2	0	1	88			1,682	1	0	0	41
			BLC3		3,158	2	0	2	61			1,169	1	0	1	29
			BLC4		3,261	2	0	2	63			1,207	1	0	1	30
			RCCO		3,187	3	0	3	62			1,179	2	0	2	29
			LCCO		3,186	0	0	1	62			1,179	0	0	1	29
			AFR		4,633	2	0	2	90			1,714	1	0	1	42
P11	30	700	T1S	69W	5,869	2	0	2	85							
			T2M		5,437	3	0	3	79							
			T3M		5,499	3	0	3	79							
			T3LG		4,913	2	0	2	71							
			T4M		5,581	3	0	3	81							
			T4LG		5,076	2	0	2	73							
			TFTM		5,620	3	0	3	81							
			T5M		5,742	3	0	1	83							
			T5W		5,835	3	0	2	84							
			T5LG		5,759	2	0	1	83							
			BLC3		4,000	2	0	2	58							
			BLC4		4,131	3	0	3	60							
			RCCO		4,036	3	0	3	58							
			LCCO		4,036	0	0	1	58							
			AFR		5,869	2	0	2	85							
P12	30	1050	T1S	106W	7,928	3	0	3	75							
			T2M		7,344	3	0	3	70							
			T3M		7,428	3	0	3	70							
			T3LG		6,636	2	0	2	63							
			T4M		7,539	3	0	3	71							
			T4LG		6,857	2	0	2	65							
			TFTM		7,592	3	0	3	72							
			T5M		7,757	3	0	2	73							
			T5W		7,882	4	0	2	75							
			T5LG		7,779	3	0	1	74							
			BLC3		5,403	3	0	3	51							
			BLC4		5,581	3	0	3	53							
			RCCO		5,453	3	0	3	52							
			LCCO		5,452	0	0	2	52							
			AFR		7,928	3	0	3	75							



Dimensions

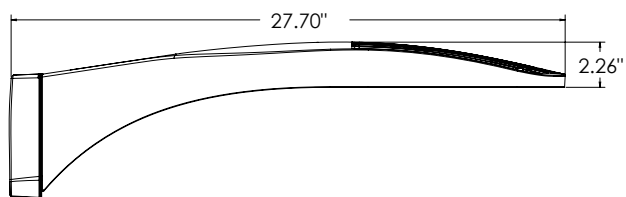


DSX0 with RPA, RPA5, SPA5, SPA8N mount
Weight: 25 lbs

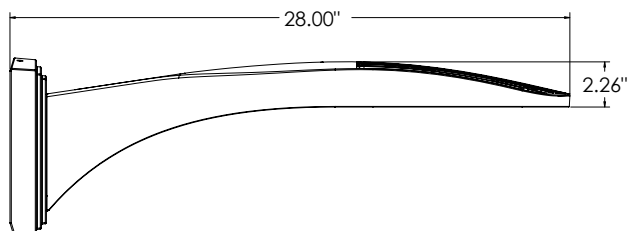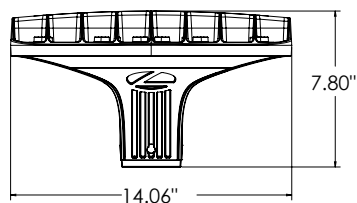


DSX0 with WBA mount
Weight: 27 lb

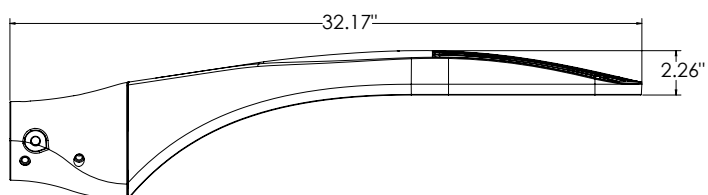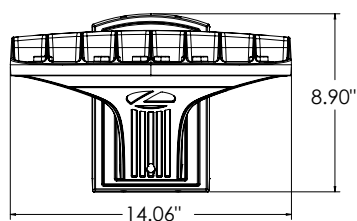


DSX0 with MA mount
Weight: 28 lbs

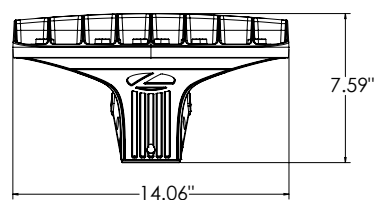


SPA (STANDARD ARM)




RPA




SPA5



RPA5





SPA8N



nLight Sensor Coverage Pattern

NLTAIR2 PIRHN

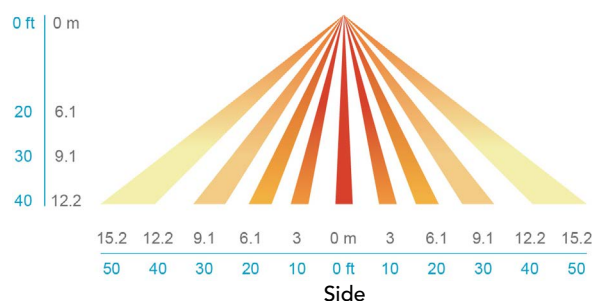

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine(s) configurations consist of amber LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life. Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.