


PROJECT NAME:

QUANTITY:

TYPE:

ORDERING CODE:



- ① Aluminum top cover.
- ② Extruded aluminum housing.
- ③ Fully sealed cast aluminum up or down light assembly (for uplight position, select "UP" from options).
- ④ Sealed cast aluminum lens frame.
- ⑤ Clear tempered glass lens.
- ⑥ Faceted specular aluminum reflector.
- ⑦ All stainless steel hardware.



SQ500



## MATERIALS

Syrios Square is made of corrosion resistant 356 aluminum alloy with a copper (CU) content of less than 0.1%. The main housing is made of seamless extruded aluminum, with an integrally sealed LED light module designed for optimal heat dissipation, and lighting performance.

## ELECTRICAL DRIVER

Driver is 0-10V dimming-ready (dims to 10%) with: 120-277 multi-volt compatibility (50-60Hz), operating temperature range of -30°C/-22°F to 55°C/131°F, output over voltage protection, output over current protection and output short circuit protection with auto-recovery.

## LED LIGHT ENGINE

Offered in 2700K/3000K/3500K/4000K CCT with 80 CRI. 70% LED lumen maintenance at 60,000 hours (L70/B50) based on IESNA LM-80-08 LED extrapolated life, calculated per IESNA TM-21-21. Optional true amber LED for turtle sensitive areas. Wavelengths: 585nm to 597nm.

## FINISH

Five-stage preparation process includes preheating of cast aluminum parts for air extraction. Polyester powder coating is applied through an electrostatic process, and oven cured for long term finish.

## CERTIFICATION

UL Certified to Canadian and U.S. safety standards. Certified for use in wet locations. Rated IP65. Photometric testing performed by an independent laboratory in accordance with IES LM-79-08 standards at 25°C. Actual performance may differ as a result of end-user environment and application.

## WARRANTY


5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <https://www.acuitybrands.com/support/warranty/terms-and-conditions>

## MOUNTING


The mounting plate is designed to fit on a: 4" (102mm) octagonal electrical box using 3.5" (89mm) C/C mounting holes or 2x4" (51x102mm) rectangular electrical box using 3.156" (80mm) C/C mounting holes.

## MEASUREMENTS

Maximum weight: 2.8 lbs (1.3 kg)

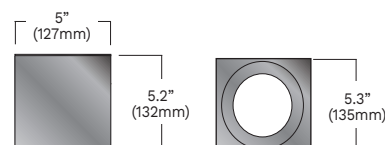

## ORDERING CODE

*SERIES	*LIGHT OUTPUT	*DISTRIBUTION	*CCT <sup>3</sup>	*VOLTAGE
<b>SQ500</b> 	<u>Static White</u> <b>L1L10</b> 924 lm / 13w  <u>True Amber</u> <b>L1LK2A</b> 124 lm / 7w <sup>1</sup>  Delivered lumens calculated at 4000K/80CRI except for amber. Flood optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>FLD</b> Flood optic 29° <b>WD</b> Wide optic 42°	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>AMB</b> 585nm to 597nm	<b>120</b> 120V <b>277</b> 277V <b>MVOLT</b> 120V-277V
	<u>Very Narrow Distribution</u> <b>L1L5NR</b> 539 lm / 10w <sup>2</sup>  Delivered lumens calculated at 4000K/80CRI. Very narrow optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>VNR</b> Very narrow optic 9°		

CONDUIT COVER	MOUNTING DIRECTION	LENS/DIFFUSER	FUSE	EMERGENCY
<b>SWK</b> Decorative cover for 3/4" conduit junction box <sup>4</sup>	<b>UP</b> Uplight position <sup>5</sup>	<b>LSL</b> Linear spread lens <b>SL</b> Solite lens <sup>6</sup>	<b>FS</b> Fuse	<b>REM7</b> Remote emergency battery, 90 min, 7W <sup>7</sup>

*FINISH	WOOD FINISH <sup>10</sup>	ENVIRONMENT
<b>BKT</b> Jet black <b>BZT</b> Bronze <b>CHT</b> Champagne <b>DGT</b> Gun metal <b>GRT</b> Titanium gray <b>MST</b> Matte silver <b>SGT</b> Steel gray <b>WHT</b> Snow white  <b>CMC</b> Custom matched color <sup>8</sup> <b>RAL</b> RAL color <sup>9</sup>	<b>ADG</b> American douglas <b>BRC</b> Birch <b>CHN</b> Chestnut <b>CRY</b> Cherry <b>KNP</b> Knotty pine <b>MPL</b> Maple <b>OFL</b> Oak <b>RSW</b> Rosewood <b>TEK</b> Teak <b>WLN</b> Walnut	<b>MG</b> Marine grade paint <sup>11</sup> <b>NT</b> Natatorium suitable <sup>12</sup>

### NOTES

\*- Denotes a required field

1- Available only with AMB option.

2- Available only with VNR distribution option. Not available with 27K, 35K or AMB.

3- For IDA certification compliance, luminaire must be ordered with 3000K or warmer.

4- Painted to match fixture color.

5- Increases OAH to 5.3".

6- Lumen conversion factor (LCF) 0.9.

7- Remote mount 50ft - 12" square enclosure with access cover. The remote enclosure must be interior. Cable between fixture and remote box is provided by others.

8- Contact factory to coordinate custom matching color.

9- Specify RAL number.

10- Faux wood finish not applied to lens frame. Additional delay required. Not compatible with marine grade paint.

11- Marine grade paint for harsh, coastal environment and exposure to salt water. Additional delay required please contact factory for info.

12- Available only in WHT and BKT finish.

## LUMINIS.COM


Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: info@luminis.com

260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

© 2025 Acuity Brands Lighting Canada, Inc. All rights reserved. Specifications subject to change without notice.


TYPICAL PHOTOMETRY SUMMARY

SQ500-L1L10-FLD




**Total Lms:** 924 Lumens  
**Total Input Watts:** 13 W  
**Efficacy:** 74 Lumens/Watt  
**BUG:** B1-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 2098 @ 0°

SQ500-L1L10-WD



**Total Lms:** 846 Lumens  
**Total Input Watts:** 13 W  
**Efficacy:** 68 Lumens/Watt  
**BUG:** B1-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 1317 @ 0°

SQ500-L1L5NR-VNR



**Total Lms:** 539 Lumens  
**Total Input Watts:** 10 W  
**Efficacy:** 53 Lumens/Watt  
**BUG:** B1-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 12018 @ 0°

LUMEN CONVERSION FACTOR (LCF)		
CCT	CRI	LCF
2700K	80	0.91
3000K	80	0.94
3500K	80	0.98
4000K	80	1.00

All Photometry shown use the 80CRI 4000K LEDs.  
Please visit our web site [www.luminis.com](http://www.luminis.com) for complete I.E.S. file.