



TRAC-LITES™

13W LED CYLINDER

R606L SERIES

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____



PRODUCT DESCRIPTION

The R606L Series 13W LED is an economical and affordable track fixture, with a simple and timeless aesthetic. It approximates the light output and distribution of 50W MR16 halogen lamps, utilizing about 25% of the energy and having a rated life of 50,000 hours. It is available in 2700K, 3000K, 3500K and 4000K color temperatures with a minimum 80 CRI. Optional high CRI versions are available with a minimum 90 CRI. The R606L Series LED is available in spot, narrow flood, flood and wide flood beam distributions which can be achieved with interchangeable precision-molded custom TIR optics. It is available with an optional, bayonet-mount accessory holder that accommodates one accessory if desired. It is compatible with Juno Trac-Lites™ and Trac-Master® track and system components.



PRODUCT SPECIFICATIONS

Construction Die cast aluminum heat sink provides outstanding thermal management of LED, yielding 70% average lumen maintenance at 50,000 hours of operation • Simple, timeless design complements any decor • Available in white semi-gloss, black semi-gloss and silver metallic painted finishes.

LED High performance LED array provides outstanding reliability, performance and color quality/consistency • 2700K, 3000K, 3500K or 4000K white phosphor high performance LEDs • Chromaticity range within a 3-step MacAdam Ellipse • Exceptional 80 CRI minimum on a standard product • Optional high CRI versions offer 90 CRI minimum.

Driver Integrated into fixture housing behind LED light engine to minimize overall fixture footprint • Insulating air gap between driver and LED light engine, plus thermal potting compound, optimizes thermal operation • Provides quiet operation with or without dimming • Dimmable using high quality, factory-approved dimmers - see [R606L-DIM](#) • Solid state electronic, Class 2 compliant • Integral overcurrent and short circuit protection • Designed for greater than 50,000 hour operating life • FCC Certified to Part 15 Class B EMI standards.

Optics Proprietary, interchangeable computer-designed custom TIR optics available in four factory-configured beam spreads • One TIR optic provided with fixture (as specified in catalog number) • Simply snaps into baffled bayonet mount optic holder • Accessory optics available to enable simple beam changes in the field • Beam patterns can be altered as desired using a variety of available light control accessories.

Accessory Holder Optional accessory ring attaches to baffled optic holder without tools • May be specified as a factory-installed option or ordered separately as a field-installed accessory • Precision bayonet mounting • Accommodates one accessory if desired.

Juno Universal Track Adapter Universally compatible with both Trac-Master 1-circuit or 2-circuit track, Trac-Lites track, monopoints and special mountings • Also UL Recognized for use on ConTech® LT Series track • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • On /off switch included • Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures track light to track • Two-position power contact provided for two-circuit application.

Alternate GTYPE Track Adapter Compatible with track systems based on GES type track, including Lithonia LT Commercial Track (not LTS type) • System specific and assembled to track fixture • Available in black, silver, and white finish only • Consult factory for additional information.

Alternate HTYPE Track Adapter Compatible with track systems which use a H-type track adapter, including Lithonia LTS Decorative Track (not LT type) • System specific and assembled to track fixture • Two-position power contact provided for two-circuit application • Available in black, silver, and white finish only • Consult factory for additional information.

Alternate LTYPE Track Adapter Compatible with track systems which use a L-type track adapter • System specific and assembled to track fixture • Two-position power contact provided for two-circuit application • Available in black and white finish only • Consult factory for additional information.

Aiming 350° horizontal coverage • 90° vertical aiming capability.

Labels UL and C-UL Listed • ENERGY STAR® certified • DLC Qualified where noted on Performance Data chart • Union made • Assembled in U.S.A • 90 CRI version certified as CEC Title 24 Compliant.

Government Procurement


BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act. Please refer to www.acuitybrands.com/buy-american for additional information.

Warranty 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

DIMENSIONS



ConTech is a registered trademark of ConTech Lighting.



TRAC-LITES™

13W LED CYLINDER

R606L SERIES

ORDERING INFORMATION

Ordering Example: R606L 27K 80CRI PDIM FL BL

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution
R606L Trac-Lites™ 13W LED Cylinder	(Blank) Juno Universal 120V Track Adapter GTYPE G-Type Track Adapter HTYPE H-Type Track Adapter LTYPE ¹ L-Type Track Adapter See page 5 for Direct Canopy Mount Option (CPV) specifications.	27K 2700K 30K 3000K 35K 3500K 40K 4000K	80CRI 80 CRI 90CRI 90 CRI	PDIM Phase Dimmable	SP Spot NFL Narrow Flood FL Flood WFL Wide Flood

Finish	Accessory Holder Option
BL Black	AHR605 BLCK Accessory Holder for R606L, Black
SL Silver	AHR605 WHT Accessory Holder for R606L, White
WH White	

Accessories (Order Separately)					
AHR605 BLCK 200	Accessory Holder for R606L, Black	PRISM 200	Prismatic Spread Lens	TIR6 WFLD BLCK	TIR Optic - Wide Flood, Black
AHR605 WHT 200	Accessory Holder for R606L, White	SOLITE 200	Uniformity Lens (Solite)	TIR6 WFLD WHT	TIR Optic - Wide Flood, White
HCLBL 200	Hexagonal Cell Louver - Black	LSPREAD 200	Linear Spread Lens		
SNOOTBL 200	Snoot - Black	TIR6 SPT BLCK	TIR Optic - Spot, Black		
CGF 200	Color Glass Filter	TIR6 SPT WHT	TIR Optic - Spot, White		
DGF 200	Dichroic Glass Filter	TIR6 NFLD BLCK	TIR Optic - Narrow Flood, Black		
DCCF 200	Dichroic Color Correction Filter	TIR6 NFLD WHT	TIR Optic - Narrow Flood, White		
DIFF 200	Diffusion Lens	TIR6 FLD BLCK	TIR Optic - Flood, Black		
UVF 200	UV Filter	TIR6 FLD WHT	TIR Optic - Flood, White		

See specification sheet [D1.2.2](#) for details and color filter options.
Other accessories can be found on specification sheet [D1.2.0](#).

Notes:
1 LTYPE adapter available in BL and WH finish only.

TRAC-LITES™

13W LED CYLINDER

R606L SERIES

PERFORMANCE DATA¹

Catalog Number	Input Voltage	Watts (Typical)	Lumens	Efficacy (LPW)	Rated Life (Hours)	DLC Qualified
R606L 27K 80CRI PDIM SP	120V	13.5	1236	92	50,000	X
R606L 27K 80CRI PDIM NFL	120V	13.5	1182	88	50,000	X
R606L 27K 80CRI PDIM FL	120V	13.5	1254	93	50,000	X
R606L 27K 80CRI PDIM WFL	120V	13.5	1111	82	50,000	X
R606L 27K 90CRI PDIM SP	120V	13.5	1028	76	50,000	
R606L 27K 90CRI PDIM NFL	120V	13.5	983	73	50,000	
R606L 27K 90CRI PDIM FL	120V	13.5	1043	77	50,000	
R606L 27K 90CRI PDIM WFL	120V	13.5	924	68	50,000	
R606L 30K 80CRI PDIM SP	120V	13.5	1301	96	50,000	X
R606L 30K 80CRI PDIM NFL	120V	13.5	1244	92	50,000	X
R606L 30K 80CRI PDIM FL	120V	13.5	1320	98	50,000	X
R606L 30K 80CRI PDIM WFL	120V	13.5	1170	87	50,000	X
R606L 30K 90CRI PDIM SP	120V	13.5	1106	82	50,000	X
R606L 30K 90CRI PDIM NFL	120V	13.5	1058	78	50,000	X
R606L 30K 90CRI PDIM FL	120V	13.5	1122	83	50,000	X
R606L 30K 90CRI PDIM WFL	120V	13.5	994	74	50,000	
R606L 35K 80CRI PDIM SP	120V	13.5	1340	99	50,000	X
R606L 35K 80CRI PDIM NFL	120V	13.5	1282	95	50,000	X
R606L 35K 80CRI PDIM FL	120V	13.5	1360	101	50,000	X
R606L 35K 80CRI PDIM WFL	120V	13.5	1205	89	50,000	X
R606L 35K 90CRI PDIM SP	120V	13.5	1119	83	50,000	X
R606L 35K 90CRI PDIM NFL	120V	13.5	1070	79	50,000	X
R606L 35K 90CRI PDIM FL	120V	13.5	1135	84	50,000	X
R606L 35K 90CRI PDIM WFL	120V	13.5	1006	75	50,000	
R606L 40K 80CRI PDIM SP	120V	13.5	1366	101	50,000	X
R606L 40K 80CRI PDIM NFL	120V	13.5	1307	97	50,000	X
R606L 40K 80CRI PDIM FL	120V	13.5	1386	103	50,000	X
R606L 40K 80CRI PDIM WFL	120V	13.5	1228	91	50,000	X
R606L 40K 90CRI PDIM SP	120V	13.5	1171	87	50,000	X
R606L 40K 90CRI PDIM NFL	120V	13.5	1120	83	50,000	X
R606L 40K 90CRI PDIM FL	120V	13.5	1188	88	50,000	X
R606L 40K 90CRI PDIM WFL	120V	13.5	1053	78	50,000	X

ELECTRICAL DATA

Input Voltage	120V
Input Current (max.)	0.12A
Power Factor	>0.95
T.H.D.	<20%

¹ Performance data, including Rated Life, is based on measurements of an individual fixture operating at 120V in a 25°C ambient.



TRAC-LITES™

13W LED CYLINDER

R606L SERIES

CBCP • Centerbeam candlepower
FC • Footcandles at beam center (aim point)

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) [0.5774 for 30°, 1.0 for 45°, 1.732 for 60°].



Fixture	Beam Type	Beam Spread	Rated Life	CBCP	0°			30°			30°			45°			60°								
					MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W	D	FC	X	L	W
R606L 13W LED, 3000K, 80CRI Spot	SP	14°	50000	15742	6	437	1.5	1.5	284	2.0	1.7	4	123	6.9	4.1	2.0	348	4.0	2.0	1.4	6	284	3.5	2.0	1.7
					8	246	2.0	2.0	160	2.6	2.3	6	55	10.4	6.1	2.9	155	6.0	3.0	2.1	8	160	4.6	2.6	2.3
					10	157	2.4	2.4	102	3.3	2.8	8	31	13.9	8.2	3.9	87	8.0	4.0	2.8	10	102	5.8	3.3	2.8
					12	109	2.9	2.9	71	3.9	3.4	10	20	17.3	10.2	4.9	56	10.0	4.9	3.4	12	71	6.9	3.9	3.4
					14	80	3.4	3.4	52	4.6	3.9	12	14	20.8	12.2	5.9	39	12.0	5.9	4.1	14	52	8.1	4.6	3.9
R606L 13W LED, 3000K, 80CRI Narrow Flood	NFL	24°	50000	6033	4	377	1.7	1.7	245	2.3	1.9	2	189	3.5	3.8	1.7	533	2.0	1.7	1.2	4	245	2.3	2.3	1.9
					6	168	2.5	2.5	109	3.4	2.9	4	47	6.9	7.7	3.3	133	4.0	3.5	2.4	6	109	3.5	3.4	2.9
					8	94	3.3	3.3	61	4.5	3.9	6	21	10.4	11.5	5.0	59	6.0	5.2	3.5	8	61	4.6	4.5	3.9
					10	60	4.2	4.2	39	5.7	4.8	8	12	13.9	15.4	6.7	33	8.0	7.0	4.7	10	39	5.8	5.7	4.8
					12	42	5.0	5.0	27	6.8	5.8	10	8	17.3	19.2	8.4	21	10.0	8.7	5.9	12	27	6.9	6.8	5.8
R606L 13W LED, 3000K, 80CRI Flood	FL	34°	50000	3543	4	221	2.4	2.4	144	3.3	2.8	2	111	3.5	6.6	2.4	313	2.0	2.7	1.7	3	256	1.7	2.5	2.1
					5	142	3.0	3.0	92	4.2	3.5	3	49	5.2	10.0	3.6	139	3.0	4.0	2.6	4	144	2.3	3.3	2.8
					6	98	3.6	3.6	64	5.0	4.2	4	28	6.9	13.3	4.8	78	4.0	5.3	3.4	5	92	2.9	4.2	3.5
					7	72	4.2	4.2	47	5.8	4.9	5	18	8.7	16.6	6.0	50	5.0	6.6	4.3	6	64	3.5	5.0	4.2
					8	55	4.8	4.8	36	6.6	5.6	6	12	10.4	19.9	7.2	35	6.0	8.0	5.1	7	47	4.0	5.8	4.9
R606L 13W LED, 3000K, 80CRI Wide Flood	WFL	42°	50000	1897	2	474	1.5	1.5	308	2.1	1.7	1.0	237	1.7	5.3	1.5	671	1.0	1.8	1.1	2	308	1.2	2.1	1.7
					3	211	2.3	2.3	137	3.2	2.6	1.5	105	2.6	8.0	2.3	298	1.5	2.7	1.6	3	137	1.7	3.2	2.6
					4	119	3.0	3.0	77	4.2	3.5	2.0	59	3.5	10.6	3.0	168	2.0	3.5	2.1	4	77	2.3	4.2	3.5
					5	76	3.8	3.8	49	5.3	4.4	2.5	38	4.3	13.3	3.8	107	2.5	4.4	2.7	5	49	2.9	5.3	4.4
					6	53	4.5	4.5	34	6.4	5.2	3.0	26	5.2	16.0	4.5	75	3.0	5.3	3.2	6	34	3.5	6.4	5.2

CRI/CCT Multiplier		
CRI	CCT	Multiplier
80	27K	0.95
	30K	1.00
	35K	1.03
	40K	1.05
90	27K	0.79
	30K	0.85
	35K	0.86
	40K	0.90



TRAC-LITES™

13W LED CYLINDER

R606L SERIES

DIRECT CANOPY MOUNT

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____



PRODUCT DESCRIPTION

The R606L Series 13W LED is an economical and affordable accent luminaire, with a simple and timeless aesthetic. It approximates the light output and distribution of 50W MR16 halogen lamps, utilizing about 25% of the energy and having a rated life of 50,000 hours. It is available in 2700K, 3000K, 3500K and 4000K color temperatures with a minimum 80 CRI. Optional high CRI versions are available with a minimum 90 CRI. The R606L Series LED is available in spot, narrow flood, flood and wide flood beam distributions which can be achieved with interchangeable precision-molded custom TIR optics. It is available with an optional, bayonet-mount accessory holder that accommodates one accessory if desired. The Canopy Mount version is designed to mount over a standard j-box and is available with a variety of performance options including 277V operation, 347V operation, phase-dimming, and 0-10V dimming.



PRODUCT SPECIFICATIONS

Construction Die cast aluminum heat sink provides outstanding thermal management of LED, yielding 70% average lumen maintenance at 50,000 hours of operation • Simple, timeless design complements any decor • Available in white semi-gloss or black semi-gloss painted finishes.

LED High performance LED array provides outstanding reliability, performance and color quality/consistency • 2700K, 3000K, 3500K or 4000K white phosphor high performance LEDs • Chromaticity range within a 3-step MacAdam Ellipse • Exceptional 80 CRI minimum on a standard product • Optional high CRI versions offer 90 CRI minimum.

Electrical/Driver Multi-volt (120-277V, 50/60Hz) phase-dimmable or 0-10V dimmable driver mounted in a deep canopy • Optional 347V 0-10V dimmable driver mounted in a deep canopy • 0-10V dimming requires two (2) additional low-voltage wires to be pulled.

Dimming MVOLT versions are phase-dimmable (120V only) down to 10% or less using high quality, factory-approved dimmers - see [R600LG2-DIM](#) • MVOLT versions are also 0-10V dimmable down to as low as 1% and require two (2) additional low-voltage wires to be pulled • 347V versions are 0-10V dimmable down to as low as 1% and require two (2) additional low-voltage wires to be pulled.

Optics Proprietary, interchangeable computer-designed custom TIR optics available in four factory-configured beam spreads • One TIR optic provided with fixture (as specified in catalog number) • Simply snaps into baffled bayonet mount optic holder • Accessory optics available to enable simple beam changes in the field • Beam patterns can be altered as desired using a variety of available light control accessories.

Accessory Holder Optional accessory ring attaches to baffled optic holder without tools • May be specified as a factory-installed option or ordered separately as a field-installed accessory • Precision bayonet mounting • Accommodates one accessory if desired.

Mounting Installs over a standard electrical j-box • Accent light is permanently, factory-assembled to the mounting canopy • Universal mounting plate accommodates octagon box and typical j-box mud rings • Mounting plate designed to be installed snug to mounting surface • May be ceiling or wall mounted in any orientation • Driver is assembled into mounting canopy – see Dimensions section for canopy type and dimensions based on option selected • Canopy is securely tethered to mounting plate to facilitate wiring terminations.

Aiming 330° horizontal coverage • 180° vertical aiming capability.

Labels UL and C-UL Damp Location Listed • Union made • Assembled in U.S.A.

Government Procurement

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.


Warranty 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions.

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

DIMENSIONS

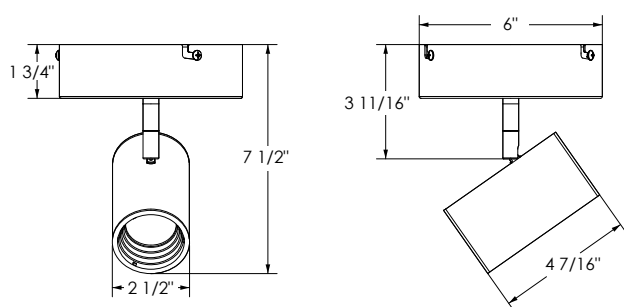

TRAC-LITES™

13W LED CYLINDER

R606L SERIES

DIRECT CANOPY MOUNT

ORDERING INFORMATION

Ordering Example: R606L CPY 30K 80CRI MVOLT NFL BL

Series	Mounting Adapter Type	Color Temperature	Color Rendering Index	Input Voltage ¹	Distribution
R606L Trac-Lites™ 13W LED Cylinder	CPY Canopy Mounting	27K 2700K 30K 3000K 35K 3500K 40K 4000K	80CRI 80 CRI 90CRI 90 CRI	MVOLT 120V/277V Operation 347 347V Operation	SP Spot NFL Narrow Flood FL Flood WFL Wide Flood

Finish	Accessory Holder Option
BL Black	AHR605 BLCK Accessory Holder for R606L, Black
WH White	AHR605 WHT Accessory Holder for R606L, White

Accessories (Order Separately)					
AHR605 BLCK 200	Accessory Holder for R606L, Black	PRISM 200	Prismatic Spread Lens	TIR6 WFLD BLCK	TIR Optic - Wide Flood, Black
AHR605 WHT 200	Accessory Holder for R606L, White	SOLITE 200	Uniformity Lens (Solite)	TIR6 WFLD WHT	TIR Optic - Wide Flood, White
HCLBL 200	Hexagonal Cell Louver - Black	LSPREAD 200	Linear Spread Lens		
SNOOTBL 200	Snoot - Black	TIR6 SPT BLCK	TIR Optic - Spot, Black		
CGF 200	Color Glass Filter	TIR6 SPT WHT	TIR Optic - Spot, White		
DGF 200	Dichroic Glass Filter	TIR6 NFLD BLCK	TIR Optic - Narrow Flood, Black		
DCCF 200	Dichroic Color Correction Filter	TIR6 NFLD WHT	TIR Optic - Narrow Flood, White		
DIFF 200	Diffusion Lens	TIR6 FLD BLCK	TIR Optic - Flood, Black		
UVF 200	UV Filter	TIR6 FLD WHT	TIR Optic - Flood, White		

See specification sheet [D1.2.2](#) for details and color filter options.

Notes:

¹ MVOLT option can be either phase-dimmed (120V) or 0-10V dimmed; 347V option is 0-10V dimming only.

TRAC-LITES™

13W LED CYLINDER

R606L SERIES

DIRECT CANOPY MOUNT

PERFORMANCE DATA¹

Catalog Number	Input Voltage	Watts (Typical)	Lumens	Efficacy (LPW)	Rated Life (Hours)
R606L 27K 80CRI PDIM SP	120V	14.0	1236	92	50,000
R606L 27K 80CRI PDIM NFL	120V	14.0	1182	88	50,000
R606L 27K 80CRI PDIM FL	120V	14.0	1254	93	50,000
R606L 27K 80CRI PDIM WFL	120V	14.0	1111	82	50,000
R606L 27K 90CRI PDIM SP	120V	14.0	1028	76	50,000
R606L 27K 90CRI PDIM NFL	120V	14.0	983	73	50,000
R606L 27K 90CRI PDIM FL	120V	14.0	1043	77	50,000
R606L 27K 90CRI PDIM WFL	120V	14.0	924	68	50,000
R606L 30K 80CRI PDIM SP	120V	14.0	1301	96	50,000
R606L 30K 80CRI PDIM NFL	120V	14.0	1244	92	50,000
R606L 30K 80CRI PDIM FL	120V	14.0	1320	98	50,000
R606L 30K 80CRI PDIM WFL	120V	14.0	1170	87	50,000
R606L 30K 90CRI PDIM SP	120V	14.0	1106	82	50,000
R606L 30K 90CRI PDIM NFL	120V	14.0	1058	78	50,000
R606L 30K 90CRI PDIM FL	120V	14.0	1122	83	50,000
R606L 30K 90CRI PDIM WFL	120V	14.0	994	74	50,000
R606L 35K 80CRI PDIM SP	120V	14.0	1340	99	50,000
R606L 35K 80CRI PDIM NFL	120V	14.0	1282	95	50,000
R606L 35K 80CRI PDIM FL	120V	14.0	1360	101	50,000
R606L 35K 80CRI PDIM WFL	120V	14.0	1205	89	50,000
R606L 35K 90CRI PDIM SP	120V	14.0	1119	83	50,000
R606L 35K 90CRI PDIM NFL	120V	14.0	1070	79	50,000
R606L 35K 90CRI PDIM FL	120V	14.0	1135	84	50,000
R606L 35K 90CRI PDIM WFL	120V	14.0	1006	75	50,000
R606L 40K 80CRI PDIM SP	120V	14.0	1366	101	50,000
R606L 40K 80CRI PDIM NFL	120V	14.0	1307	97	50,000
R606L 40K 80CRI PDIM FL	120V	14.0	1386	103	50,000
R606L 40K 80CRI PDIM WFL	120V	14.0	1228	91	50,000
R606L 40K 90CRI PDIM SP	120V	14.0	1171	87	50,000
R606L 40K 90CRI PDIM NFL	120V	14.0	1120	83	50,000
R606L 40K 90CRI PDIM FL	120V	14.0	1188	88	50,000
R606L 40K 90CRI PDIM WFL	120V	14.0	1053	78	50,000

¹ Performance data, including Rated Life, is based on measurements of an individual fixture operating at 120V in a 25°C ambient.

ELECTRICAL DATA

Input Voltage	120V	277V	347V
Input Wattage (typ.)	14.0	14.4	15.4
Input Current (max.)	0.13A	0.06A	0.06A
Power Factor	>0.99	>0.95	>0.81
T.H.D.	<20%	<20%	<30%

TRAC-LITES™



13W LED CYLINDER





R606L SERIES

DIRECT CANOPY MOUNT

CBCP • Centerbeam candlepower
FC • Footcandles at beam center (aim point)

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) [0.5774 for 30°, 1.0 for 45°, 1.732 for 60°].



Fixture	Beam Type	Beam Spread	Rated Life	CBCP	0°			30°			30°			45°			60°								
					MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W	D	FC	X	L	W
R606L 13W LED, 3000K, 80CRI Spot	SP	14°	50000	15742	6	437	1.5	1.5	284	2.0	1.7	4	123	6.9	4.1	2.0	348	4.0	2.0	1.4	6	284	3.5	2.0	1.7
		8			246	2.0	2.0	160	2.6	2.3	6	55	10.4	6.1	2.9	155	6.0	3.0	2.1	8	160	4.6	2.6	2.3	
		10			157	2.4	2.4	102	3.3	2.8	8	31	13.9	8.2	3.9	87	8.0	4.0	2.8	10	102	5.8	3.3	2.8	
		12			109	2.9	2.9	71	3.9	3.4	10	20	17.3	10.2	4.9	56	10.0	4.9	3.4	12	71	6.9	3.9	3.4	
		14			80	3.4	3.4	52	4.6	3.9	12	14	20.8	12.2	5.9	39	12.0	5.9	4.1	14	52	8.1	4.6	3.9	
R606L 13W LED, 3000K, 80CRI Narrow Flood	NFL	24°	50000	6033	4	377	1.7	1.7	245	2.3	1.9	2	189	3.5	3.8	1.7	533	2.0	1.7	1.2	4	245	2.3	2.3	1.9
		6			168	2.5	2.5	109	3.4	2.9	4	47	6.9	7.7	3.3	133	4.0	3.5	2.4	6	109	3.5	3.4	2.9	
		8			94	3.3	3.3	61	4.5	3.9	6	21	10.4	11.5	5.0	59	6.0	5.2	3.5	8	61	4.6	4.5	3.9	
		10			60	4.2	4.2	39	5.7	4.8	8	12	13.9	15.4	6.7	33	8.0	7.0	4.7	10	39	5.8	5.7	4.8	
		12			42	5.0	5.0	27	6.8	5.8	10	8	17.3	19.2	8.4	21	10.0	8.7	5.9	12	27	6.9	6.8	5.8	
R606L 13W LED, 3000K, 80CRI Flood	FL	34°	50000	3543	4	221	2.4	2.4	144	3.3	2.8	2	111	3.5	6.6	2.4	313	2.0	2.7	1.7	3	256	1.7	2.5	2.1
		5			142	3.0	3.0	92	4.2	3.5	3	49	5.2	10.0	3.6	139	3.0	4.0	2.6	4	144	2.3	3.3	2.8	
		6			98	3.6	3.6	64	5.0	4.2	4	28	6.9	13.3	4.8	78	4.0	5.3	3.4	5	92	2.9	4.2	3.5	
		7			72	4.2	4.2	47	5.8	4.9	5	18	8.7	16.6	6.0	50	5.0	6.6	4.3	6	64	3.5	5.0	4.2	
		8			55	4.8	4.8	36	6.6	5.6	6	12	10.4	19.9	7.2	35	6.0	8.0	5.1	7	47	4.0	5.8	4.9	
R606L 13W LED, 3000K, 80CRI Wide Flood	WFL	42°	50000	1897	2	474	1.5	1.5	308	2.1	1.7	1.0	237	1.7	5.3	1.5	671	1.0	1.8	1.1	2	308	1.2	2.1	1.7
		3			211	2.3	2.3	137	3.2	2.6	1.5	105	2.6	8.0	2.3	298	1.5	2.7	1.6	3	137	1.7	3.2	2.6	
		4			119	3.0	3.0	77	4.2	3.5	2.0	59	3.5	10.6	3.0	168	2.0	3.5	2.1	4	77	2.3	4.2	3.5	
		5			76	3.8	3.8	49	5.3	4.4	2.5	38	4.3	13.3	3.8	107	2.5	4.4	2.7	5	49	2.9	5.3	4.4	
		6			53	4.5	4.5	34	6.4	5.2	3.0	26	5.2	16.0	4.5	75	3.0	5.3	3.2	6	34	3.5	6.4	5.2	

CRI/CCT Multiplier		
CRI	CCT	Multiplier
80	27K	0.95
	30K	1.00
	35K	1.03
	40K	1.05
90	27K	0.79
	30K	0.85
	35K	0.86
	40K	0.90