



TRAC-LITES™

15W ADJUSTABLE BEAM LED CYLINDER

R620L SERIES

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____



PRODUCT DESCRIPTION

The R620L Series 15W Adjustable Beam LED Cylinder is an economical and affordable track fixture, with a simple and timeless cylindrical aesthetic. It features a proprietary optical system that enables the beam distribution to be adjusted continuously between 17-degrees and 53-degrees simply by rotating the front bezel, without the use of tools or requiring any additional accessories. This makes the R620L perfect for applications that require a range of beam patterns or where the desired beam pattern is unknown at the time of specification/purchase. It is available in 2700K, 3000K, 3500K and 4000K color temperatures with a minimum 80 CRI. Optional high CRI versions are available with a minimum 90 CRI. The R620L Series LED is available with an optional, bayonet-mount accessory holder that accommodates one accessory if desired. It is compatible with Juno Trac-Lites™ and Trac-Master® track and system components, or it can be specified with a variety of factory-assembled alternate mounting adapters to fit on practically any competitive 120V track system.



PRODUCT SPECIFICATIONS

Construction Die cast aluminum housing provides outstanding thermal management of LED, yielding 70% average lumen maintenance at 50,000 hours of operation • Simple, timeless design complements any decor • Available in white, black and silver finishes.

LED High performance LED array provides outstanding reliability, performance and color quality/consistency • 2700K, 3000K, 3500K or 4000K white phosphor high performance LEDs • Chromaticity range within a 3-step MacAdam Ellipse • Exceptional 80 CRI minimum on standard product • Optional high CRI versions offer 90 CRI minimum, with an R9 value greater than 50.

Driver Integrated into fixture housing behind LED light engine to minimize overall fixture footprint • Insulating air gap between driver and LED light engine, plus thermal potting compound, optimizes thermal operation • Provides quiet operation with or without dimming • Dimmable using high quality, factory-approved dimmers – see [R620L-DIM](#) • Solid state electronic, Class 2 compliant • Integral overcurrent and short circuit protection • Designed for greater than 50,000 hour operating life • FCC Certified to Part 15 Class B EMI standards.

Optics Patented, computer-designed custom multi-component optical system delivers continuous beam adjustment from as low as 17-degrees up to 53-degrees • Adjustment is accomplished by simply rotating the front bezel, without the use of tools or add-on accessories • Variable Beam System offers unparalleled efficacy throughout the beam adjustment range, maintaining lumen output within a narrow 40 lumen or less performance band • Beam patterns can be further altered as desired using a variety of available light control accessories.

Accessory Holder Optional accessory ring attaches directly to front bezel without tools • May be specified as a factory-installed option or ordered separately as a field-installed accessory • Precision bayonet mounting • Accommodates one accessory if desired.

Juno Universal Track Adapter Universally compatible with both Trac-Master 1-circuit or 2-circuit track, Trac-Lites track, monopoints and special mountings • Also UL Recognized for use on ConTech® LT Series track • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • On /off switch included • Patented embossed polarity arrows on bottom of adapter • Spring-loaded positive latch with embossed polarity arrows secures track light to track • Two-position power contact provided for two-circuit application.

Alternate TEK Track Adapter Compatible with Juno TEK track system • System specific and assembled to track fixture • Integrally polarized construction to prevent reverse installation – only allows insertion in proper orientation • Rotary circuit selector enables simple switching between circuits • Integral on/off switch enables individual fixtures to be switched for servicing.

Alternate GTYPE Track Adapter Compatible with track systems based on GES type track, including Lithonia LT Commercial Track (not LTS type) • System specific and assembled to track fixture • Available in black, silver, and white finish only • Consult factory for additional information.

Alternate HTYPE Track Adapter Compatible with track systems which use a H-type track adapter, including Lithonia LTS Decorative Track (not LT type) • System specific and assembled to track fixture • Two-position power contact provided for two-circuit application • Available in black, silver, and white finish only • Consult factory for additional information.

Alternate LTYPE Track Adapter Compatible with track systems which use a L-type track adapter • System specific and assembled to track fixture • Two-position power contact provided for two-circuit application • Available in black, silver, and white finish only • Consult factory for additional information.

Aiming 360° horizontal coverage • 95° vertical aiming capability.

Labels UL and C-UL Listed • ENERGY STAR® certified • Union made • Assembled in U.S.A.

Government Procurement

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

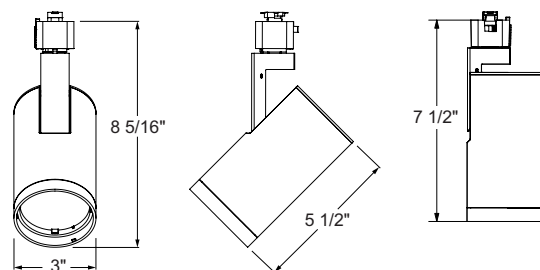
BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act. Please refer to www.acuitybrands.com/buy-american for additional information.

Warranty 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

ConTech is a registered trademark of ConTech Lighting.

DIMENSIONS



TRAC-LITES™

15W ADJUSTABLE BEAM LED CYLINDER

R620L SERIES

ORDERING INFORMATION

Ordering Example: R620L 27K 80CRI PDIM VBS BL, R620L HTYPE 30K 90CRI PDIM VBS WH AHR620 WHT

| Series | Mounting Adapter Type | Color Temperature | Color Rendering Index | Dimming Compatibility | Distribution |
|--|---|-------------------|-----------------------|-----------------------|--------------------------|
| R620L Trac-Lites™ 15W Adjustable Beam LED Cylinder | (Blank) Juno Universal 120V Track Adapter | 27K 2700K | 80CRI 80 CRI | PDIM Phase Dimmable | VBS Variable Beam System |
| | GTYPE G-Type Track Adapter | 30K 3000K | 90CRI 90 CRI | | |
| | HTYPE H-Type Track Adapter | 35K 3500K | | | |
| | LTYPE L-Type Track Adapter | 40K 4000K | | | |
| | TEK¹ TEK 120V Track Adapter | | | | |
| | See page 5 for Direct Canopy Mount Option (CPY) specifications. | | | | |

| Finish | Accessory Holder Option |
|-----------|---|
| BL Black | AHR620 BLCK Accessory Holder for R620L, Black |
| SL Silver | AHR620 WHT Accessory Holder for R620L, White |
| WH White | |

| Accessories (Order Separately) | | | |
|--------------------------------|-----------------------------------|-------------|-----------------------------|
| AHR620 BLCK 275 | Accessory Holder for R620L, Black | DIFF 275 | Diffusion Glass Lens |
| AHR620 WHT 275 | Accessory Holder for R620L, White | UVF 275 | UV Filter |
| HCLBL 275 | Hexagonal Cell Louver - Black | LSPREAD 275 | Linear Spread Glass Lens |
| CGF 275 | Color Glass Filters | PRISM 275 | Prismatic Spread Glass Lens |
| DGF 275 | Dichroic Glass Filters | SOLITE 275 | Uniformity Lens (Solite) |

See specification sheet [D1.2.2](#) for details and color filter options.

Other accessories can be found on specification sheet [D1.2.0](#).

Notes:

¹ TEK adapter is black on silver finish fixtures.

TRAC-LITES™

15W ADJUSTABLE BEAM LED CYLINDER

R620L SERIES

PERFORMANCE DATA¹

| Catalog Number | Input Voltage | Watts (Typical) | Lumens | Efficacy (LPW) | Rated Life (Hours) |
|--------------------------------|---------------|-----------------|--------|----------------|--------------------|
| R620L 27K 80CRI (Spot) | 120V | 15.3 | 1128 | 74 | 50,000 |
| R620L 27K 80CRI (Narrow Flood) | 120V | 15.3 | 1107 | 72 | 50,000 |
| R620L 27K 80CRI (Flood) | 120V | 15.3 | 1099 | 72 | 50,000 |
| R620L 27K 80CRI (Wide Flood) | 120V | 15.3 | 1089 | 71 | 50,000 |
| R620L 27K 90CRI (Spot) | 120V | 15.3 | 928 | 61 | 50,000 |
| R620L 27K 90CRI (Narrow Flood) | 120V | 15.3 | 911 | 60 | 50,000 |
| R620L 27K 90CRI (Flood) | 120V | 15.3 | 905 | 59 | 50,000 |
| R620L 27K 90CRI (Wide Flood) | 120V | 15.3 | 896 | 59 | 50,000 |
| R620L 30K 80CRI (Spot) | 120V | 15.3 | 1175 | 77 | 50,000 |
| R620L 30K 80CRI (Narrow Flood) | 120V | 15.3 | 1153 | 75 | 50,000 |
| R620L 30K 80CRI (Flood) | 120V | 15.3 | 1145 | 75 | 50,000 |
| R620L 30K 80CRI (Wide Flood) | 120V | 15.3 | 1134 | 74 | 50,000 |
| R620L 30K 90CRI (Spot) | 120V | 15.3 | 987 | 65 | 50,000 |
| R620L 30K 90CRI (Narrow Flood) | 120V | 15.3 | 969 | 63 | 50,000 |
| R620L 30K 90CRI (Flood) | 120V | 15.3 | 962 | 63 | 50,000 |
| R620L 30K 90CRI (Wide Flood) | 120V | 15.3 | 953 | 62 | 50,000 |
| R620L 35K 80CRI (Spot) | 120V | 15.3 | 1199 | 78 | 50,000 |
| R620L 35K 80CRI (Narrow Flood) | 120V | 15.3 | 1176 | 77 | 50,000 |
| R620L 35K 80CRI (Flood) | 120V | 15.3 | 1168 | 76 | 50,000 |
| R620L 35K 80CRI (Wide Flood) | 120V | 15.3 | 1157 | 76 | 50,000 |
| R620L 35K 90CRI (Spot) | 120V | 15.3 | 1022 | 67 | 50,000 |
| R620L 35K 90CRI (Narrow Flood) | 120V | 15.3 | 1003 | 66 | 50,000 |
| R620L 35K 90CRI (Flood) | 120V | 15.3 | 996 | 65 | 50,000 |
| R620L 35K 90CRI (Wide Flood) | 120V | 15.3 | 987 | 64 | 50,000 |
| R620L 40K 80CRI (Spot) | 120V | 15.3 | 1234 | 81 | 50,000 |
| R620L 40K 80CRI (Narrow Flood) | 120V | 15.3 | 1211 | 79 | 50,000 |
| R620L 40K 80CRI (Flood) | 120V | 15.3 | 1202 | 79 | 50,000 |
| R620L 40K 80CRI (Wide Flood) | 120V | 15.3 | 1191 | 78 | 50,000 |
| R620L 40K 90CRI (Spot) | 120V | 15.3 | 1034 | 68 | 50,000 |
| R620L 40K 90CRI (Narrow Flood) | 120V | 15.3 | 1015 | 66 | 50,000 |
| R620L 40K 90CRI (Flood) | 120V | 15.3 | 1008 | 66 | 50,000 |
| R620L 40K 90CRI (Wide Flood) | 120V | 15.3 | 998 | 65 | 50,000 |

¹Performance data, including Rated Life, is based on measurements of an individual fixture operating at 120V in a 25°C ambient. Additionally, due to the variable nature of the R620L optical system, beamspread types (shown above in parentheses) are nominally chosen to represent typical designations found in dedicated beam designs - actual results, though comparable, may vary in the field.

ELECTRICAL DATA

| | |
|----------------------|-------|
| Input Voltage | 120V |
| Input Current (max.) | 0.13A |
| Power Factor | >0.95 |
| T.H.D. | <20% |



TRAC-LITES™





15W ADJUSTABLE BEAM LED CYLINDER

R620L SERIES

CBCP • Centerbeam candlepower
FC • Footcandles at beam center (aim point)

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) [0.5774 for 30°, 1.0 for 45°, 1.732 for 60°].



| Fixture | Beam Type | Beam Spread | Rated Life | CBCP | 0° | | | | 30° | | | | 30° | | | | 45° | | | | 60° | | | | |
|---|-----------|--|------------|------|----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | | | | MH | FC | L | W | FC | L | W | D | FC | X | L | W | FC | X | L | W | D | FC | X | L | W |
| R620L 15W LED, 3000K, 80CRI Spot | SP | 17°  | 50000 | 7241 | 6 | 201 | 1.8 | 1.8 | 131 | 2.4 | 2.1 | 3 | 101 | 5.2 | 3.8 | 1.8 | 284 | 3.0 | 1.8 | 1.3 | 6 | 131 | 3.5 | 2.4 | 2.1 |
| | | | | | 8 | 113 | 2.4 | 2.4 | 73 | 3.2 | 2.7 | 4 | 57 | 6.9 | 5.1 | 2.4 | 160 | 4.0 | 2.4 | 1.7 | 8 | 73 | 4.6 | 3.2 | 2.7 |
| | | | | | 10 | 72 | 3.0 | 3.0 | 47 | 4.0 | 3.4 | 5 | 36 | 8.7 | 6.4 | 3.0 | 102 | 5.0 | 3.0 | 2.1 | 10 | 47 | 5.8 | 4.0 | 3.4 |
| | | | | | 12 | 50 | 3.6 | 3.6 | 33 | 4.8 | 4.1 | 6 | 25 | 10.4 | 7.6 | 3.6 | 71 | 6.0 | 3.6 | 2.5 | 12 | 33 | 6.9 | 4.8 | 4.1 |
| | | | | | 14 | 37 | 4.2 | 4.2 | 24 | 5.6 | 4.8 | 7 | 18 | 12.1 | 8.9 | 4.2 | 52 | 7.0 | 4.3 | 2.9 | 14 | 24 | 8.1 | 5.6 | 4.8 |
| R620L 15W LED, 3000K, 80CRI Narrow Flood | NFL | 25°  | 50000 | 3050 | 4 | 191 | 1.8 | 1.8 | 124 | 2.4 | 2.1 | 2 | 95 | 3.5 | 4.2 | 1.8 | 270 | 2.0 | 1.9 | 1.3 | 4 | 124 | 2.3 | 2.4 | 2.1 |
| | | | | | 6 | 85 | 2.7 | 2.7 | 55 | 3.6 | 3.1 | 3 | 42 | 5.2 | 6.3 | 2.7 | 120 | 3.0 | 2.8 | 1.9 | 6 | 55 | 3.5 | 3.6 | 3.1 |
| | | | | | 8 | 48 | 3.6 | 3.6 | 31 | 4.8 | 4.1 | 4 | 24 | 6.9 | 8.4 | 3.6 | 67 | 4.0 | 3.8 | 2.5 | 8 | 31 | 4.6 | 4.8 | 4.1 |
| | | | | | 10 | 31 | 4.5 | 4.5 | 20 | 6.1 | 5.2 | 5 | 15 | 8.7 | 10.5 | 4.5 | 43 | 5.0 | 4.7 | 3.2 | 10 | 20 | 5.8 | 6.1 | 5.2 |
| | | | | | 12 | 21 | 5.4 | 5.4 | 14 | 7.3 | 6.2 | 6 | 11 | 10.4 | 12.6 | 5.4 | 30 | 6.0 | 5.6 | 3.8 | 12 | 14 | 6.9 | 7.3 | 6.2 |
| R620L 15W LED, 3000K, 80CRI Flood | FL | 35°  | 50000 | 1995 | 4 | 125 | 2.5 | 2.5 | 81 | 3.5 | 2.9 | 1 | 249 | 1.7 | 3.6 | 1.3 | 705 | 1.0 | 1.4 | 0.9 | 3 | 144 | 1.7 | 2.6 | 2.2 |
| | | | | | 5 | 80 | 3.2 | 3.2 | 52 | 4.3 | 3.6 | 2 | 62 | 3.5 | 7.2 | 2.5 | 176 | 2.0 | 2.8 | 1.8 | 4 | 81 | 2.3 | 3.5 | 2.9 |
| | | | | | 6 | 55 | 3.8 | 3.8 | 36 | 5.2 | 4.4 | 3 | 28 | 5.2 | 10.8 | 3.8 | 78 | 3.0 | 4.2 | 2.7 | 5 | 52 | 2.9 | 4.3 | 3.6 |
| | | | | | 7 | 41 | 4.4 | 4.4 | 26 | 6.1 | 5.1 | 4 | 16 | 6.9 | 14.4 | 5.0 | 44 | 4.0 | 5.6 | 3.6 | 6 | 36 | 3.5 | 5.2 | 4.4 |
| | | | | | 8 | 31 | 5.0 | 5.0 | 20 | 7.0 | 5.8 | 5 | 10 | 8.7 | 18.0 | 6.3 | 28 | 5.0 | 7.0 | 4.5 | 7 | 26 | 4.0 | 6.1 | 5.1 |
| R620L 15W LED, 3000K, 80CRI Wide Flood | WFL | 53°  | 50000 | 1196 | 2 | 299 | 2.0 | 2.0 | 194 | 2.9 | 2.3 | 1.0 | 150 | 1.7 | 16.7 | 2.0 | 423 | 1.0 | 2.7 | 1.4 | 2 | 194 | 1.2 | 2.9 | 2.3 |
| | | | | | 3 | 133 | 3.0 | 3.0 | 86 | 4.4 | 3.5 | 1.5 | 66 | 2.6 | 25.0 | 3.0 | 188 | 1.5 | 4.0 | 2.1 | 3 | 86 | 1.7 | 4.4 | 3.5 |
| | | | | | 4 | 75 | 4.0 | 4.0 | 49 | 5.9 | 4.6 | 2.0 | 37 | 3.5 | 33.4 | 4.0 | 106 | 2.0 | 5.4 | 2.8 | 4 | 49 | 2.3 | 5.9 | 4.6 |
| | | | | | 5 | 48 | 5.0 | 5.0 | 31 | 7.3 | 5.8 | 2.5 | 24 | 4.3 | 41.7 | 5.0 | 68 | 2.5 | 6.7 | 3.6 | 5 | 31 | 2.9 | 7.3 | 5.8 |
| | | | | | 6 | 33 | 6.0 | 6.0 | 22 | 8.8 | 7.0 | 3.0 | 17 | 5.2 | 50.1 | 6.0 | 47 | 3.0 | 8.1 | 4.3 | 6 | 22 | 3.5 | 8.8 | 7.0 |

Also note that, due to the variable nature of the R620L optical system, beamspread types (shown above in table) are nominally chosen to represent typical designations found in dedicated beam designs - actual results, though comparable, may vary in the field.

| CRI/CCT Multiplier | | |
|--------------------|-----|------------|
| CRI | CCT | Multiplier |
| 80 | 27K | 0.96 |
| | 30K | 1.00 |
| | 35K | 1.02 |
| | 40K | 1.05 |
| 90 | 27K | 0.79 |
| | 30K | 0.84 |
| | 35K | 0.87 |
| | 40K | 0.88 |



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

TRAC-LITES™

15W ADJUSTABLE BEAM LED CYLINDER

R620L SERIES

DIRECT CANOPY MOUNT



PRODUCT DESCRIPTION

The R620L Series 15W Adjustable Beam LED Cylinder is an economical and affordable accent luminaire, with a simple and timeless cylindrical aesthetic. It features a proprietary optical system that enables the beam distribution to be adjusted continuously between 17-degrees and 53-degrees simply by rotating the front bezel, without the use of tools or requiring any additional accessories. This makes the R620L perfect for applications that require a range of beam patterns or where the desired beam pattern is unknown at the time of specification/purchase. It is available in 2700K, 3000K, 3500K and 4000K color temperatures with a minimum 80 CRI. Optional high CRI versions are available with a minimum 90 CRI. The R620L Series LED is available with an optional, bayonet-mount accessory holder that accommodates one accessory if desired. The Canopy Mount version is designed to mount over a standard j-box and is available with a variety of performance options including 277V operation, 347V operation, phase-dimming, and 0-10V dimming.



PRODUCT SPECIFICATIONS

Construction Die cast aluminum housing provides outstanding thermal management of LED, yielding 70% average lumen maintenance at 50,000 hours of operation • Simple, timeless design complements any decor • Available in white semi-gloss or black semi-gloss finishes.

LED High performance LED array provides outstanding reliability, performance and color quality/consistency • 2700K, 3000K, 3500K or 4000K white phosphor high performance LEDs • Chromaticity range within a 3-step MacAdam Ellipse • Exceptional 80 CRI minimum on standard product • Optional high CRI versions offer 90 CRI minimum, with an R9 value greater than 50.

Electrical/Driver Multi-volt (120-277V, 50/60Hz)

phase-dimmable or 0-10V dimmable driver mounted in a deep canopy • Optional 347V 0-10V dimmable driver mounted in a deep canopy • 0-10V dimming requires two (2) additional low-voltage wires to be pulled.

Dimming MVOLT versions are phase-dimmable (120V only) down to 10% or less using high quality, factory-approved dimmers - see [R600LG2-DIM](#) • MVOLT versions are also 0-10V dimmable down to as low as 1% and require two (2) additional low-voltage wires to be pulled • 347V versions are 0-10V dimmable down to as low as 1% and require two (2) additional low-voltage wires to be pulled.

Optics Patented, computer-designed custom multi-component optical system delivers continuous beam adjustment from as low as 17-degrees up to 53-degrees • Adjustment is accomplished by simply rotating the front bezel, without the use of tools or add-on accessories • Variable Beam System offers unparalleled efficacy throughout the beam adjustment range, maintaining lumen output within a narrow 40 lumen or less performance band • Beam patterns can be further altered as desired using a variety of available light control accessories.

Accessory Holder Optional accessory ring attaches directly to front bezel without tools • May be specified as a factory-installed option or ordered separately as a field-installed accessory • Precision bayonet mounting • Accommodates one accessory if desired.

Mounting Installs over a standard electrical j-box • Accent light is permanently, factory-assembled to the mounting canopy • Universal mounting plate accommodates octagon box and typical j-box mud rings • Mounting plate designed to be installed snug to mounting surface • May be ceiling or wall mounted in any orientation • Driver is assembled into mounting canopy – see Dimensions section for canopy type and dimensions based on option selected • Canopy is securely tethered to mounting plate to facilitate wiring terminations.

Aiming 360° horizontal coverage • 190° vertical aiming capability.

Labels UL and C-UL Damp Location Listed • Union made • Assembled in U.S.A.

Government Procurement

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

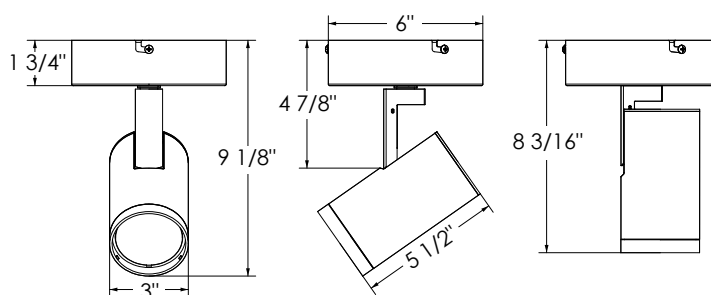
BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.

Warranty 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

DIMENSIONS



TRAC-LITES™

15W ADJUSTABLE BEAM LED CYLINDER

R620L SERIES

DIRECT CANOPY MOUNT

ORDERING INFORMATION

Ordering Example: R620L CPY 30K 80CRI MVOLT VBS BL

| Series | Mounting Adapter Type | Color Temperature | Color Rendering Index | Input Voltage ¹ | Distribution |
|---|----------------------------|--|--|---|---------------------------------|
| R620L Trac-Lites™ 15W Adjustable Beam LED Cylinder | CPY Canopy Mounting | 27K 2700K 30K 3000K 35K 3500K 40K 4000K | 80CRI 80 CRI 90CRI 90 CRI | MVOLT 120V/277V Operation 347 347V Operation | VBS Variable Beam System |

| Finish | Accessory Holder Option |
|------------------------------------|---|
| BL Black WH White | AHR620 BLCK Accessory Holder for R620L, Black AHR620 WHT Accessory Holder for R620L, White |

| Accessories (Order Separately) | | | |
|--------------------------------|-----------------------------------|--------------------|-----------------------------|
| AHR620 BLCK 275 | Accessory Holder for R620L, Black | DIFF 275 | Diffusion Glass Lens |
| AHR620 WHT 275 | Accessory Holder for R620L, White | UVF 275 | UV Filter |
| HCLBL 275 | Hexagonal Cell Louver - Black | LSPREAD 275 | Linear Spread Glass Lens |
| CGF 275 | Color Glass Filters | PRISM 275 | Prismatic Spread Glass Lens |
| DGF 275 | Dichroic Glass Filters | SOLITE 275 | Uniformity Lens (Solite) |

See specification sheet [D1.2.2](#) for details and color filter options.

Notes:

¹ MVOLT option can be either phase-dimmed (120V) or 0-10V dimmed; 347V option is 0-10V dimming only.

TRAC-LITES™

15W ADJUSTABLE BEAM LED CYLINDER

R620L SERIES

DIRECT CANOPY MOUNT

PERFORMANCE DATA¹

| Catalog Number | Input Voltage | Watts (Typical) | Lumens | Efficacy (LPW) | Rated Life (Hours) |
|--------------------------------|---------------|-----------------|--------|----------------|--------------------|
| R620L 27K 80CRI (Spot) | 120V | 15.6 | 1128 | 74 | 50,000 |
| R620L 27K 80CRI (Narrow Flood) | 120V | 15.6 | 1107 | 72 | 50,000 |
| R620L 27K 80CRI (Flood) | 120V | 15.6 | 1099 | 72 | 50,000 |
| R620L 27K 80CRI (Wide Flood) | 120V | 15.6 | 1089 | 71 | 50,000 |
| R620L 27K 90CRI (Spot) | 120V | 15.6 | 928 | 61 | 50,000 |
| R620L 27K 90CRI (Narrow Flood) | 120V | 15.6 | 911 | 60 | 50,000 |
| R620L 27K 90CRI (Flood) | 120V | 15.6 | 905 | 59 | 50,000 |
| R620L 27K 90CRI (Wide Flood) | 120V | 15.6 | 896 | 59 | 50,000 |
| R620L 30K 80CRI (Spot) | 120V | 15.6 | 1175 | 77 | 50,000 |
| R620L 30K 80CRI (Narrow Flood) | 120V | 15.6 | 1153 | 75 | 50,000 |
| R620L 30K 80CRI (Flood) | 120V | 15.6 | 1145 | 75 | 50,000 |
| R620L 30K 80CRI (Wide Flood) | 120V | 15.6 | 1134 | 74 | 50,000 |
| R620L 30K 90CRI (Spot) | 120V | 15.6 | 987 | 65 | 50,000 |
| R620L 30K 90CRI (Narrow Flood) | 120V | 15.6 | 969 | 63 | 50,000 |
| R620L 30K 90CRI (Flood) | 120V | 15.6 | 962 | 63 | 50,000 |
| R620L 30K 90CRI (Wide Flood) | 120V | 15.6 | 953 | 62 | 50,000 |
| R620L 35K 80CRI (Spot) | 120V | 15.6 | 1199 | 78 | 50,000 |
| R620L 35K 80CRI (Narrow Flood) | 120V | 15.6 | 1176 | 77 | 50,000 |
| R620L 35K 80CRI (Flood) | 120V | 15.6 | 1168 | 76 | 50,000 |
| R620L 35K 80CRI (Wide Flood) | 120V | 15.6 | 1157 | 76 | 50,000 |
| R620L 35K 90CRI (Spot) | 120V | 15.6 | 1022 | 67 | 50,000 |
| R620L 35K 90CRI (Narrow Flood) | 120V | 15.6 | 1003 | 66 | 50,000 |
| R620L 35K 90CRI (Flood) | 120V | 15.6 | 996 | 65 | 50,000 |
| R620L 35K 90CRI (Wide Flood) | 120V | 15.6 | 987 | 64 | 50,000 |
| R620L 40K 80CRI (Spot) | 120V | 15.6 | 1234 | 81 | 50,000 |
| R620L 40K 80CRI (Narrow Flood) | 120V | 15.6 | 1211 | 79 | 50,000 |
| R620L 40K 80CRI (Flood) | 120V | 15.6 | 1202 | 79 | 50,000 |
| R620L 40K 80CRI (Wide Flood) | 120V | 15.6 | 1191 | 78 | 50,000 |
| R620L 40K 90CRI (Spot) | 120V | 15.6 | 1034 | 68 | 50,000 |
| R620L 40K 90CRI (Narrow Flood) | 120V | 15.6 | 1015 | 66 | 50,000 |
| R620L 40K 90CRI (Flood) | 120V | 15.6 | 1008 | 66 | 50,000 |
| R620L 40K 90CRI (Wide Flood) | 120V | 15.6 | 998 | 65 | 50,000 |

¹Performance data, including Rated Life, is based on measurements of an individual fixture operating at 120V in a 25°C ambient. Additionally, due to the variable nature of the R620L optical system, beamspread types (shown above in parentheses) are nominally chosen to represent typical designations found in dedicated beam designs - actual results, though comparable, may vary in the field.

ELECTRICAL DATA

| | | | |
|----------------------|-------|-------|-------|
| Input Voltage | 120V | 277V | 347V |
| Input Wattage (typ.) | 15.6 | 16.0 | 16.7 |
| Input Current (max.) | 0.15A | 0.07A | 0.06A |
| Power Factor | >0.99 | >0.96 | >0.83 |
| T.H.D. | <10% | <20% | <30% |

TRAC-LITES™



15W ADJUSTABLE BEAM LED CYLINDER





R620L SERIES

DIRECT CANOPY MOUNT

CBCP • Centerbeam candlepower
FC • Footcandles at beam center (aim point)

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) [0.5774 for 30°, 1.0 for 45°, 1.732 for 60°].



| Fixture | Beam Type | Beam Spread | Rated Life | CBCP | 0° | | | 30° | | | 30° | | | 45° | | | | 60° | | | | | | | |
|---|-----------|--|------------|------|----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|
| | | | | | MH | FC | L | W | FC | L | W | D | FC | X | L | W | FC | X | L | W | D | FC | X | L | W |
| R620L 15W LED, 3000K, 80CRI Spot | SP | 17°  | 50000 | 7241 | 6 | 201 | 1.8 | 1.8 | 131 | 2.4 | 2.1 | 3 | 101 | 5.2 | 3.8 | 1.8 | 284 | 3.0 | 1.8 | 1.3 | 6 | 131 | 3.5 | 2.4 | 2.1 |
| | | | | | 8 | 113 | 2.4 | 2.4 | 73 | 3.2 | 2.7 | 4 | 57 | 6.9 | 5.1 | 2.4 | 160 | 4.0 | 2.4 | 1.7 | 8 | 73 | 4.6 | 3.2 | 2.7 |
| | | | | | 10 | 72 | 3.0 | 3.0 | 47 | 4.0 | 3.4 | 5 | 36 | 8.7 | 6.4 | 3.0 | 102 | 5.0 | 3.0 | 2.1 | 10 | 47 | 5.8 | 4.0 | 3.4 |
| | | | | | 12 | 50 | 3.6 | 3.6 | 33 | 4.8 | 4.1 | 6 | 25 | 10.4 | 7.6 | 3.6 | 71 | 6.0 | 3.6 | 2.5 | 12 | 33 | 6.9 | 4.8 | 4.1 |
| | | | | | 14 | 37 | 4.2 | 4.2 | 24 | 5.6 | 4.8 | 7 | 18 | 12.1 | 8.9 | 4.2 | 52 | 7.0 | 4.3 | 2.9 | 14 | 24 | 8.1 | 5.6 | 4.8 |
| R620L 15W LED, 3000K, 80CRI Narrow Flood | NFL | 25°  | 50000 | 3050 | 4 | 191 | 1.8 | 1.8 | 124 | 2.4 | 2.1 | 2 | 95 | 3.5 | 4.2 | 1.8 | 270 | 2.0 | 1.9 | 1.3 | 4 | 124 | 2.3 | 2.4 | 2.1 |
| | | | | | 6 | 85 | 2.7 | 2.7 | 55 | 3.6 | 3.1 | 3 | 42 | 5.2 | 6.3 | 2.7 | 120 | 3.0 | 2.8 | 1.9 | 6 | 55 | 3.5 | 3.6 | 3.1 |
| | | | | | 8 | 48 | 3.6 | 3.6 | 31 | 4.8 | 4.1 | 4 | 24 | 6.9 | 8.4 | 3.6 | 67 | 4.0 | 3.8 | 2.5 | 8 | 31 | 4.6 | 4.8 | 4.1 |
| | | | | | 10 | 31 | 4.5 | 4.5 | 20 | 6.1 | 5.2 | 5 | 15 | 8.7 | 10.5 | 4.5 | 43 | 5.0 | 4.7 | 3.2 | 10 | 20 | 5.8 | 6.1 | 5.2 |
| | | | | | 12 | 21 | 5.4 | 5.4 | 14 | 7.3 | 6.2 | 6 | 11 | 10.4 | 12.6 | 5.4 | 30 | 6.0 | 5.6 | 3.8 | 12 | 14 | 6.9 | 7.3 | 6.2 |
| R620L 15W LED, 3000K, 80CRI Flood | FL | 35°  | 50000 | 1995 | 4 | 125 | 2.5 | 2.5 | 81 | 3.5 | 2.9 | 1 | 249 | 1.7 | 3.6 | 1.3 | 705 | 1.0 | 1.4 | 0.9 | 3 | 144 | 1.7 | 2.6 | 2.2 |
| | | | | | 5 | 80 | 3.2 | 3.2 | 52 | 4.3 | 3.6 | 2 | 62 | 3.5 | 7.2 | 2.5 | 176 | 2.0 | 2.8 | 1.8 | 4 | 81 | 2.3 | 3.5 | 2.9 |
| | | | | | 6 | 55 | 3.8 | 3.8 | 36 | 5.2 | 4.4 | 3 | 28 | 5.2 | 10.8 | 3.8 | 78 | 3.0 | 4.2 | 2.7 | 5 | 52 | 2.9 | 4.3 | 3.6 |
| | | | | | 7 | 41 | 4.4 | 4.4 | 26 | 6.1 | 5.1 | 4 | 16 | 6.9 | 14.4 | 5.0 | 44 | 4.0 | 5.6 | 3.6 | 6 | 36 | 3.5 | 5.2 | 4.4 |
| | | | | | 8 | 31 | 5.0 | 5.0 | 20 | 7.0 | 5.8 | 5 | 10 | 8.7 | 18.0 | 6.3 | 28 | 5.0 | 7.0 | 4.5 | 7 | 26 | 4.0 | 6.1 | 5.1 |
| R620L 15W LED, 3000K, 80CRI Wide Flood | WFL | 53°  | 50000 | 1196 | 2 | 299 | 2.0 | 2.0 | 194 | 2.9 | 2.3 | 1.0 | 150 | 1.7 | 16.7 | 2.0 | 423 | 1.0 | 2.7 | 1.4 | 2 | 194 | 1.2 | 2.9 | 2.3 |
| | | | | | 3 | 133 | 3.0 | 3.0 | 86 | 4.4 | 3.5 | 1.5 | 66 | 2.6 | 25.0 | 3.0 | 188 | 1.5 | 4.0 | 2.1 | 3 | 86 | 1.7 | 4.4 | 3.5 |
| | | | | | 4 | 75 | 4.0 | 4.0 | 49 | 5.9 | 4.6 | 2.0 | 37 | 3.5 | 33.4 | 4.0 | 106 | 2.0 | 5.4 | 2.8 | 4 | 49 | 2.3 | 5.9 | 4.6 |
| | | | | | 5 | 48 | 5.0 | 5.0 | 31 | 7.3 | 5.8 | 2.5 | 24 | 4.3 | 41.7 | 5.0 | 68 | 2.5 | 6.7 | 3.6 | 5 | 31 | 2.9 | 7.3 | 5.8 |
| | | | | | 6 | 33 | 6.0 | 6.0 | 22 | 8.8 | 7.0 | 3.0 | 17 | 5.2 | 50.1 | 6.0 | 47 | 3.0 | 8.1 | 4.3 | 6 | 22 | 3.5 | 8.8 | 7.0 |

Also note that, due to the variable nature of the R620L optical system, beamspread types (shown above in table) are nominally chosen to represent typical designations found in dedicated beam designs - actual results, though comparable, may vary in the field.

| CRI/CCT Multiplier | | |
|--------------------|-----|------------|
| CRI | CCT | Multiplier |
| 80 | 27K | 0.96 |
| | 30K | 1.00 |
| | 35K | 1.02 |
| | 40K | 1.05 |
| 90 | 27K | 0.79 |
| | 30K | 0.84 |
| | 35K | 0.87 |
| | 40K | 0.88 |