


PROJECT NAME:

QUANTITY:

TYPE:

ORDERING CODE:

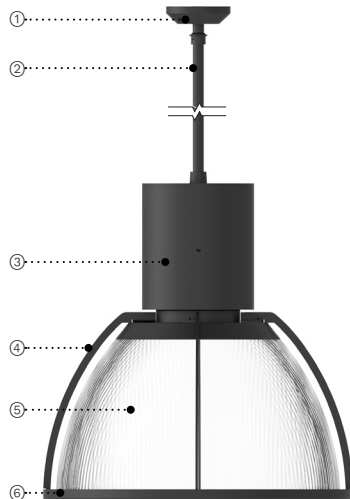

- ① Heavy duty 45° hang straight swivel, with Ø 5" (127mm) canopy and universal mounting plate.
- ② Field adjustable suspension stem or silver braided power cable with aircraft safety cable. Also, offered with a catenary suspension attachment.
- ③ Extruded aluminum driver housing.
- ④ Set of four side struts.
- ⑤ **PR2282:** Diffused acrylic prismatic refractor.
PR2287: Aluminum reflector.
Inner surface: multi-faceted specular anodized.
Exterior surface: Satin anodized natural aluminum. Alternate exterior finish (Option RP)
- ⑥ Struts holder ring. Clear acrylic flat bottom lens (Option CF22) and diffused acrylic flat bottom lens (Option DF22) are available as options.



PR2282



PR2287

MATERIALS

Prisma is made of an extruded aluminum housing designed to optimize the functionality of the driver and the solid state components. Prisma is available with a choice of two interchangeable reflectors. Aluminum reflector designed to optimize light source performance and uniformity. Diffused acrylic prismatic refractor with a linear peripheral pattern providing general upward illumination with efficient down lighting.

ELECTRICAL DRIVER

120V/277V driver is 0-10V dimming-ready (min. dim to 5%)* with 120-277 multi-volt compatibility (50-60Hz), operating temperature range of -20°C/-4°F to +50°C/122°F, output over voltage protection, output over current protection and output short circuit protection with auto-recovery.

347V driver is 0-10V dimming ready (min. dim to 10%) with operating temperature range of -20°C/-4°F to +50°C/122°F, over current and output short circuit protection.

LED LIGHT ENGINE

Offered in 2700K, 3000K, 3500K & 4000K with 80CRI. 70% LED lumen maintenance at 125,000 hours (L70/B50) based on IESNA LM-80-08 LED extrapolated life, calculated per IESNA TM-21-21.

FINISH

Five-stage preparation process includes preheating of cast aluminum parts for air extraction. Polyester powder coating is applied through an electrostatic process, and oven cured for long term finish.

CERTIFICATION

UL Certified to Canadian and U.S. safety standards. Certified for use in damp location. Rated IP20. Photometric testing performed by an independent laboratory in accordance with IES LM-79-08 standards at 25°C. Actual performance may differ as a result of end-user environment and application.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <https://www.acuitybrands.com/support/warranty/terms-and-conditions>

MOUNTING

Mounts on a standard 4" (102mm) octagonal electrical box with 3.5" (89mm) C/C mounting holes.

MEASUREMENTS

Maximum weight: 27.1 lbs (12.3 kg)



* L1L65, L1L85 and L1L100 dims to 1%.

LUMINIS.COM


Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: info@luminis.com
260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

© 2025 Acuity Brands Lighting Canada, Inc. All rights reserved. Specifications subject to change without notice.

PR2282/PR2287

Rev. 05/07/25

ORDERING CODE

*SERIES	*LIGHT OUTPUT	*CCT	*VOLTAGE	CONTROLS		
<div>PR2282</div> 	L1L65	6779 lm / 58w	27K	2700K	120120V 277277V 347347V MVOLT120V-277V ¹	NLTAIR2 nLight AIR 2.0 control embedded in canopy with black antenna ²
	L1L85	8412 lm / 74w	30K	3000K		
	L1L100	9732 lm / 86w	35K	3500K		
	L1L120	11772 lm / 107w	40K	4000K		
	L1L140	13758 lm / 105w				
	L1L160	16617 lm / 132w				
	L1L200	19415 lm / 158w				
Delivered lumens calculated at 4000K/80CRI. Typical power consumption. Refer to LCF table for outputs at other CCTs.						

LENS/DIFFUSER		*MOUNTING		MOUNTING ACCESSORY		SUSPENSION LENGTH		FUSE	
CF22	Clear acrylic flat bottom lens ³	CAT3	Catenary suspension attachment	STC	Set of 3 stabilizer cables ⁴	12IN	12"	FS	Fuse
DC22	Diffused acrylic prismatic bottom conical lens ³	HK	Male hook with 0.43" opening, includes 36" 5/18 black power cord			24IN	24"		
DF22	Diffused acrylic flat bottom lens ³	SPG	Silver braided suspension power cord with aircraft cable			36IN	36"		
		STM	Field-cutable hang straight suspension stem			48IN	48"		
		TA	3/4" NPT conduit adaptor			60IN	60"		
						Available up to 240" in 12" increments. Required field for SPG, STM.			

EMERGENCY	SHIELDING ACCESSORIES	RING GUARD	*FINISH
REM7 Remote emergency battery, 90 min, 7W ⁵	BC22 Aluminum lower diffuser band ⁶	WG22 Zinc plated concentric wire guard ⁷	BKT Jet black BZT Bronze CHT Champagne DGT Gun metal GRT Titanium gray MST Matte silver SGT Steel gray WHT Snow white CMC Custom matched color ⁸ RAL RAL color ⁹

NOTES

- *- Denotes a required field
- 1- MVOLT not available with FS.
- 2- Available only with 120V or 277V. Installed in Ø15" canopy with STM/SPG. Refer to the mounting image for more details. Not available with L1L140, L1L160, L1L200, REM7, CAT3, TA, HK.
- 3- Lumen conversion factor (LCF) 0.94.
- 4- Available only with STM.


- 5- Remote mount 50ft - 12" square enclosure with access cover. The remote enclosure must be interior. Cable between fixture and remote box is provided by others. Not available with 347V or CAT3.
- 6- Available only with PR2280.
- 7- Not available with DC22, CF22, DF22.
- 8- Contact factory to coordinate custom matching color.
- 9- Specify RAL number.

LUMINIS.COM

Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: info@luminis.com
 260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

PR2282/PR2287
 Rev. 05/07/25

ORDERING CODE

*SERIES	*LIGHT OUTPUT	*CCT	*VOLTAGE	CONTROLS
<div>PR2287</div> 	L1L656757 lm / 58w	27K2700K	120120V	NLTAIR2 nLight AIR 2.0 control embedded in canopy with black antenna²
	L1L858515 lm / 79w	30K3000K	277277V	
	L1L1009700 lm / 86w	35K3500K	347347V	
	L1L12011733 lm / 108w	40K4000K	MVOLT120V-277V¹	
	L1L14013712 lm / 105w			
	L1L16016562 lm / 132w			
	L1L20019351 lm / 158w			
Delivered lumens calculated at 4000K/80CRI. Typical power consumption. Refer to LCF table for outputs at other CCTs.				

LENS/DIFFUSER		*MOUNTING		MOUNTING ACCESSORY		SUSPENSION LENGTH		FUSE	
CF22	Clear acrylic flat bottom lens ³	CAT3	Catenary suspension attachment	STC	Set of 3 stabilizer cables ⁴	12IN	12"	FS	Fuse
DC22	Diffused acrylic prismatic bottom conical lens ³	HK	Male hook with 0.43" opening, includes 36" 5/18 black power cord			24IN	24"		
DF22	Diffused acrylic flat bottom lens ³	SPG	Silver braided suspension power cord with aircraft cable			36IN	36"		
		STM	Field-cutable hang straight suspension stem			48IN	48"		
						60IN	60"		
						Available up to 240" in 12" increments. Required field for SPG, STM.			

EMERGENCY	RING GUARD	*FINISH	REFLECTOR FINISH
REM7 Remote emergency battery, 90 min, 7W ⁵	WG22 Zinc plated concentric wire guard ⁶	BKT Jet black BZT Bronze CHT Champagne DGT Gun metal GRT Titanium gray MST Matte silver SGT Steel gray WHT Snow white CMC Custom matched color ⁷ RAL RAL color ⁸	RP Exterior of aluminum reflector to match housing finish ⁹

NOTES

- *- Denotes a required field
- 1- MVOLT not available with FS.
- 2- Available only with 120V or 277V. Installed in Ø15" canopy with STM/SPG. Refer to the mounting image for more details. Not available with L1L140, L1L160, L1L200, REM7, CAT3, TA, HK.
- 3- Lumen conversion factor (LCF) 0.94.
- 4- Available only with STM.

- 5- Remote mount 50ft - 12" square enclosure with access cover. The remote enclosure must be interior. Cable between fixture and remote box is provided by others. Not available with 347V or CAT3.
- 6- Not available with DC22, CF22, DF22.
- 7- Contact factory to coordinate custom matching color.
- 8- Specify RAL number.
- 9- Available only with PR2285.

LUMINIS.COM


Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: info@luminis.com
 260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

PR2282/PR2287

Rev. 05/07/25


TYPICAL PHOTOMETRY SUMMARY

PR2282-L1L200



Total Lms: 19415 Lumens
Total Input Watts: 157.5 W
Efficacy: 123 Lumens/Watt
CCT/CRI: 4000K/80
Maximum Candela: 15,720 @
 0°H/2.5°V

PR2287-L1L200



Total Lms: 19351 Lumens
Total Input Watts: 157.5 W
Efficacy: 123 Lumens/Watt
CCT/CRI: 4000K/80
Maximum Candela: 15,669 @
 0°H/2.5°V

LUMEN CONVERSION FACTOR (LCF)

CCT	CRI	LCF
2700K	80	0.92
3000K	80	0.95
3500K	80	0.98
4000K	80	1.00

All Photometry shown use the 80CRI 4000K LEDs.
 Please visit our web site www.luminis.com for complete I.E.S. file.

LUMINIS.COM


Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: info@luminis.com
 260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

© 2025 Acuity Brands Lighting Canada, Inc. All rights reserved. Specifications subject to change without notice.


PR2282/PR2287
 Rev. 05/07/25


Page 4 of 6

OPTION DETAILS



CANOPY TOP VIEW



NLTAIR2 (STM & SPG) 
Ø11" canopy with nLight AIR
Control gen2 and black antenna.

For the following light outputs:
L1L65, L1L85, L1L100, L1L120




CF22
Clear acrylic flat bottom lens
with nickel plated clamp ring.



DC22
Diffused acrylic prismatic
bottom conical lens with nickel
plated clamp ring.



DF22
Diffused acrylic flat bottom
lens with nickel plated clamp
ring.




CAT3
Cast aluminum catenary junction box with 2 sealed connectors for 0.24"-0.47" (6mm-12mm) power cable. Ready to accept 1/4" or 1/2" stainless steel suspension cable.
Weight: 30.4 lbs (13.8 kg)
(Structural design, power cable, control cable, stainless steel catenary cable, cable fittings, and fittings for mounting to support structure provided by others.)

ANGLE ADJUSTMENT MECHANISM




Power cable in:
3 conductor x 14
gauge AWG. The
2 cable glands
located at the top
can accommodate a
cable ranging from
10mm - 14mm.

Control cable in:
The 2 cable glands
on the bottom can
accommodate a
cable ranging from
6mm - 11mm.




SPG
Silver braided power cord with
onsite adjustable aircraft safety
cable.


OPTION DETAILS




HK
0.43" opening supplied with 5/18 black power cord 36" lg.




STM
Heavy duty 45° hang straight swivel, with Ø 5" (127mm) canopy and universal mounting plate. Ø 7/8" (22mm) suspension stem with aircraft safety cable.



TA
3/4" NPT Suspension conduit adaptor (conduit by others). Supplied with 3 X 18 ga. X 36" lg. wiring. (Longer wires to be specified.)

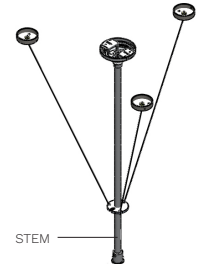

STC
Set of three stabilizer cables.

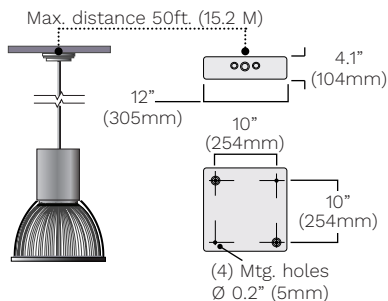

REM7
7W Remote mount 120/277V emergency battery pack.



BC22
Aluminum lower diffuser band, same color as luminaire.

PR2282 only



RP
Inner reflector specular aluminum. Exterior same color as luminaire.

PR2287 only



WG22
Zinc plated concentric ring guard