


PROJECT NAME:

QUANTITY:

TYPE:

ORDERING CODE:

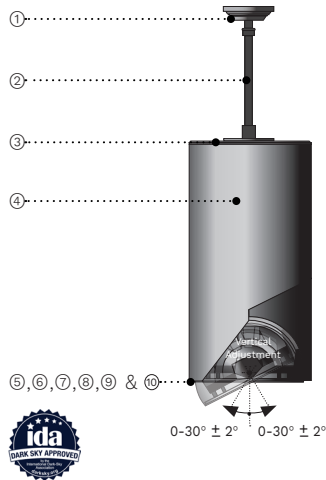

- ① Heavy duty 45° hang straight swivel, with Ø 5" (127mm) canopy and universal mounting plate.
- ② Field adjustable suspension stem or silver braided power cable with aircraft safety cable. Also, offered with a catenary suspension attachment.
- ③ Cast aluminum ventilated top cover.
- ④ Seamless extruded aluminum cylindrical driver housing.
- ⑤ Fully sealed cast aluminum down light assembly.
- ⑥ Sealed cast aluminum lens frame.
- ⑦ Clear tempered glass lens.
- ⑧ Faceted specular aluminum reflector.
- ⑨ Light module with $\pm 30^\circ$ tilting mechanism allowing forward and back light adjustability. Optional fully adjustable 360° rotation. Regressed light module available as an option.
- ⑩ All stainless steel hardware.



SY805

MATERIALS

Syrios is made of corrosion resistant 356 aluminum alloy with a copper (CU) content of less than 0.1%. The main housing is made of seamless extruded aluminum, with an integrally sealed LED light module designed for optimal heat dissipation, and lighting performance. Syrios is standard with a unique proprietary design allowing the sealed LED module to tilt within the cylindrical housing. The top cast aluminum cover includes ventilation slots allowing air circulation and cooling of assembly.

ELECTRICAL DRIVER

Driver is 0-10V dimming-ready (dims to 10%) with: 120-277 multi-volt compatibility (50-60Hz), operating temperature range of $-40^\circ\text{C}/-40^\circ\text{F}$ to $55^\circ\text{C}/131^\circ\text{F}$, output over voltage protection, output over current protection and output short circuit protection with auto-recovery.

LED LIGHT ENGINE

Offered in 2700K/3000K/3500K/4000K CCT with 80 CRI. 70% LED lumen maintenance at 60,000 hours (L70/B50) based on IESNA LM-80-08 LED extrapolated life, calculated per IESNA TM-21-21. Optional true amber LED for turtle sensitive areas. Wavelengths: 585nm to 597nm.

FINISH

Five-stage preparation process including preheating of cast aluminum parts for air extraction, and an environmentally friendly alloy sealant. Polyester powder coating is applied through an electrostatic process and oven cured for long term finish.

CERTIFICATION

UL Certified to Canadian and U.S. safety standards. Certified for use in wet locations. Rated IP65*. Photometric testing performed by an independent laboratory in accordance with IES LM-79-08 standards at 25°C . Actual performance may differ as a result of end-user environment and application.

WARRANTY


5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <https://www.acuitybrands.com/support/warranty/terms-and-conditions>

MOUNTING

The mounting plate is designed to fit on a 4" (102mm) octagonal electrical box using 3.5" (89mm) C/C mounting holes. Fixture must be installed on a finished ceiling for exterior applications and/or exposed to inclement weather.

MEASUREMENTS

Maximum weight: 18.9 lbs (8.6 kg)

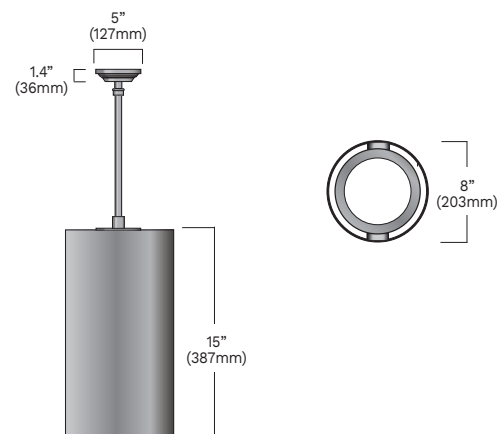


*Luminaire only. Ceiling canopy must be protected.

LUMINIS.COM

Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: info@luminis.com
260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

SY805
Rev. 11/25/24

ORDERING CODE

*SERIES	*LIGHT OUTPUT	*DISTRIBUTION	*CCT ⁴	*VOLTAGE	*FINISH
SY805 	<u>Static White</u> L1L20 2157 lm / 22w L1L35 3572 lm / 40w L1L50 5357 lm / 55w L1L75 7440 lm / 77w <u>True Amber</u> L1LK2A 440 lm / 11w ¹ Delivered lumens calculated at 4000K/80CRI except for amber. Flood optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	NR Narrow optic 12° ³ FLD Flood optic 28° WD Wide optic 38° VWD Very wide optic 55°	27K 2700K 30K 3000K 35K 3500K 40K 4000K AMB 585nm to 597nm	120 120V 277 277V 347 347V ³ 480 480V ³ HVOLT 347V-480V ³ MVOLT 120V-277V	BKT Jet black BZT Bronze CHT Champagne DGT Gun metal GRT Titanium gray MST Matte silver SGT Steel gray WHT Snow white CMC Custom matched color ⁶ RAL RAL color ⁷
	<u>Very Narrow Distribution</u> L1L30NR 2954 lm / 50w ² Delivered lumens calculated at 4000K/80CRI. Very narrow optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.				

*MOUNTING	SUSPENSION LENGTH	MOUNTING ACCESSORY	CONTROLS	LENS/DIFFUSER
SPG Silver braided power cord with aircraft cable ⁸ STM Field-cutable hang straight stem CAT3 Catenary suspension attachment ⁹	12IN 12" 24IN 24" 36IN 36" 48IN 48" 60IN 60" Available up to 240" in 12" increments. Required field for SPG, STM.	STC Set of 3 stabilizer cables ¹⁰	NLTAIR2 nLight AIR 2.0 control embedded in canopy with black antenna ¹¹	LSL Linear spread lens SL Solite lens ¹²

FUSE	EMERGENCY	LOUVERS	ADJUSTABILITY	REGRESSED	WOOD FINISH ¹⁵	ENVIRONMENT
FS Fuse	REM7 Remote emergency battery, 90 min, 7W ¹³	HL Hexcell louver	A360 360° adjustable rotation	RG Regressed light module ¹⁴	ADG American douglas BRC Birch CHN Chestnut CRY Cherry KNP Knotty pine MPL Maple OFL Oak RSW Rosewood TEK Teak WLN Walnut	MG Marine grade paint ¹⁶ NT Natatorium suitable ¹⁷


NOTES ON NEXT PAGE

NOTES

- *- Denotes a required field
- 1- Available only with AMB option.
- 2- Available only with VNR distribution option. Not available with 27K, 35K or AMB.
- 3- Not available with L1L75.
- 4- Field angle 21°.
- 5- For IDA certification compliance, luminaire must be ordered with 3000K or warmer.
- 6- Contact factory to coordinate custom matching color.
- 7- Specify RAL number.
- 8- Not suitable for outdoor locations.
- 9- Not available with NLTAIR2 or REM7.
- 10- Available only with STM.
- 11- Available only with 120V or 277V. Installed in Ø11" or Ø15" canopy with STM/SPG. Refer to the mounting image for more details. Not available with REM7, VNR, NT or AMB.
- 12- Lumen conversion factor (LCF) 0.9.
- 13- Remote mount 50ft - 12" square enclosure with access cover. The remote enclosure must be interior. Cable between fixture and remote box is provided by others.
- 14- Cylindrical housing extended by 1" (25.4mm) for increased cut-off.
- 15- Faux wood finish not applied to canopy, lens frame, accessories or stem (if selected). Additional delay required. Not compatible with marine grade paint.
- 16- Marine grade paint for harsh, coastal environment and exposure to salt water. Additional delay required please contact factory for info.
- 17- Available only in WHT and BKT finish.


TYPICAL PHOTOMETRY SUMMARY

SY805-L1L50-NR

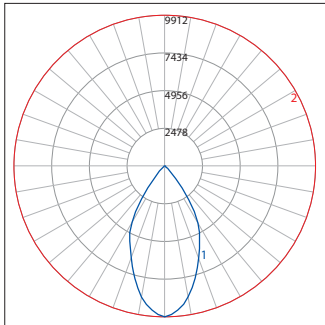


Total Lms: 4528 Lumens
Total Input Watts: 55 W
Efficacy: 82 Lumens/Watt
BUG: B3-U0-G0
CCT/CRI: 4000K/80
Maximum Candela: 48778 @ 0°

SY805-L1L75-FLD

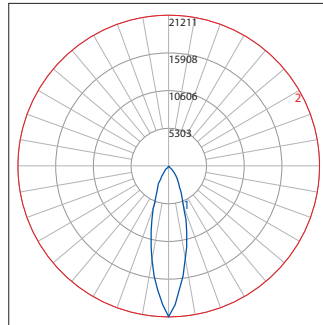


Total Lms: 7440 Lumens
Total Input Watts: 77 W
Efficacy: 97 Lumens/Watt
BUG: B4-U0-G0
CCT/CRI: 4000K/80
Maximum Candela: 21211 @ 0°

SY805-L1L75-WD

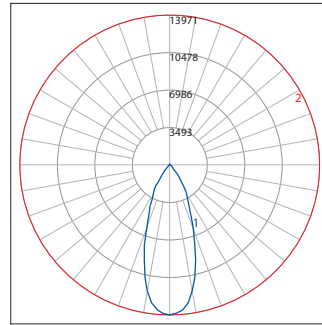


Total Lms: 7067 Lumens
Total Input Watts: 77 W
Efficacy: 92 Lumens/Watt
BUG: B4-U0-G0
CCT/CRI: 4000K/80
Maximum Candela: 13971 @ 0°

SY805-L1L75-VWD

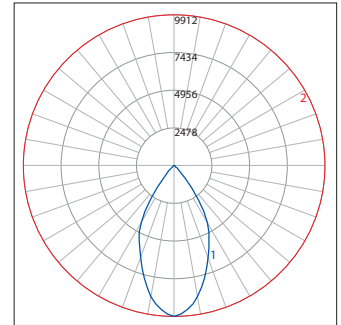

Total Lms: 7528 Lumens
Total Input Watts: 77 W
Efficacy: 98 Lumens/Watt
BUG: B4-U0-G0
CCT/CRI: 4000K/80
Maximum Candela: 9912 @ 0°

SY805-L1L30NR-VNR

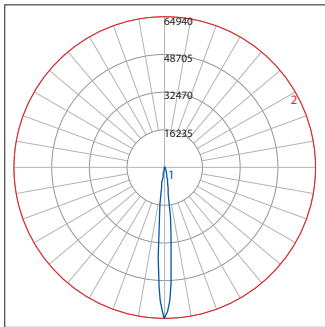

Total Lms: 2954 Lumens
Total Input Watts: 50 W
Efficacy: 59 Lumens/Watt
BUG: B3-U0-G0
CCT/CRI: 4000K/80
Maximum Candela: 64940 @ 0°

LUMEN CONVERSION FACTOR (LCF)

CCT	CRI	LCF
2700K	80	0.91
3000K	80	0.94
3500K	80	0.98
4000K	80	1.00

All Photometry shown use the 80CRI 4000K LEDs.
 Please visit our web site www.luminis.com for complete I.E.S. file.

LUMINIS.COM


Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: info@luminis.com
 260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5


© 2024 Acuity Brands Lighting Canada, Inc. All rights reserved. Specifications subject to change without notice.

SY805
Rev. 11/25/24

OPTION DETAILS


CANOPY TOP VIEW

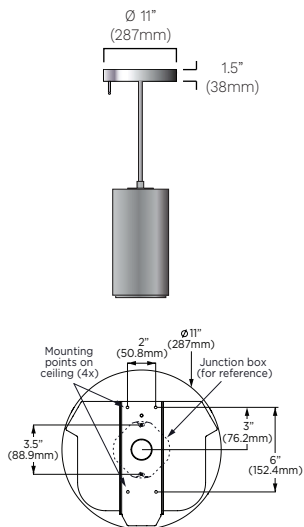


NLTAIR2 (STM & SPG) 
Ø11" canopy with nLight AIR
Control gen2 and black antenna.


For the following light sources:
L1L20, L1L35

CANOPY TOP VIEW

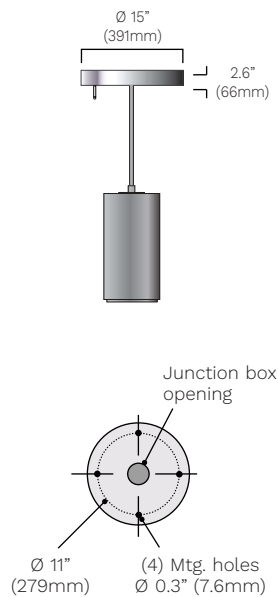


NLTAIR2 (STM & SPG) 
Ø15" canopy with nLight AIR
Control gen2 and black antenna.


For the following light sources:
L1L50, L1L75

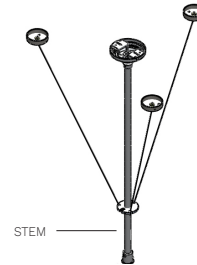

STC
Set of three stabilizer cables.

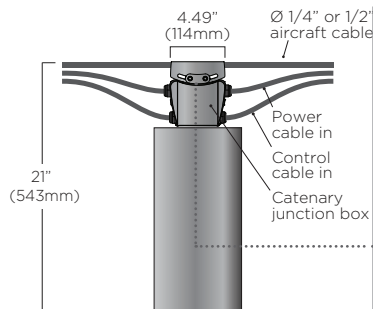

ANGLE ADJUSTMENT MECHANISM

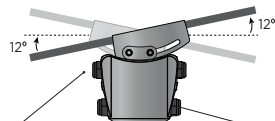

Power cable in:
3 conductor x 14 gauge AWG.
The 2 cable glands located
at the top can accommodate
a cable ranging from
10mm - 14mm.

Control cable in:
The 2 cable glands on the
bottom can accommodate
a cable ranging from
6mm - 11mm.

CAT3

Cast aluminum catenary junction box with 4 sealed connectors by Luminis and pre-inserted into housing. Ready to accept 1/4" or 1/2" stainless steel suspension cable.
Weight: 24 lbs (10.9 kg)
(Structural design, power cable, control cable, stainless steel catenary cable, cable fittings, and fittings for mounting to support structure provided by others.)