


PROJECT NAME:

QUANTITY:

TYPE:

ORDERING CODE:

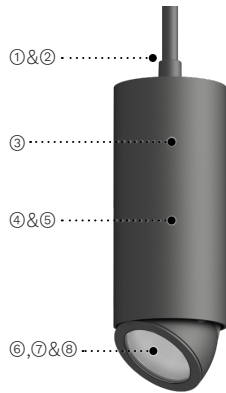

- ① Field adjustable stem or catenary suspension or braided steel cable mounting.
- ② Sturdy galvanized steel mounting plate.
- ③ Seamless extruded aluminum cylindrical housing.
- ④ Asymmetric heatsink for perfect blend of clean aesthetic and efficient heat dissipation.
- ⑤ Sleek and durable sealed cast aluminum down light assembly.
- ⑥ 30° tilt and 355° rotation for light adjustability. The module is fixed in a horizontal position for optimal lighting performance and to meet IDA certification.
- ⑦ Faceted specular aluminum reflector offers smooth lighting and reduced glare (NR/FLD/VWD). While TIR collimator lens focuses light in a very narrow beam.
- ⑧ High efficiency silicone lens.



SYP605-STM



SYP605-SPG



SYP605-CAT3

MATERIALS

Syrios Pro is made of corrosion resistant 360 aluminum alloy with a copper (CU) content of less than 0.1%. The main housing is made of seamless 6063 extruded aluminum, with an integrally sealed LED light module designed for optimal heat dissipation, and lighting performance.

ELECTRICAL DRIVER

Driver is 0-10V dimming-ready (dims to 1%) with: 120-277 multivolt (50-60Hz) or 347-480 high-volt (50-60Hz), operating temperature range of -30°C/-22°F to 45°C/113°F, output over voltage protection, output over current protection and output short circuit protection with auto-recovery.

LED LIGHT ENGINE

Offered in 2700K/3000K/3500K/4000K CCT with 80 CRI. 70% LED lumen maintenance at 60,000 hours (L70B50) based on IESNA. LM-80-08 LED extrapolated life, calculated per IESNA TM-21-21. Optional true amber LED for turtle sensitive areas. Wavelengths: 585nm to 597nm. RGBW with white CCT available in 3000K and 4000K. Quad chip technology, enabling optimal color mixing under each individual optic.

FINISH

Five-stage preparation process including preheating of cast aluminum parts for air extraction, and an environmentally friendly alloy sealant. Polyester powder coating is applied through an electrostatic process and oven cured for long term finish.

CERTIFICATION

UL Certified to Canadian and U.S. safety standards. Certified for use in wet locations. Rated IP65. Photometric testing performed by an independent laboratory in accordance with IES LM-79-08 standards at 25°C. Actual performance may differ as a result of end-user environment and application. Mounting with SPG cables for indoor only.

WARRANTY


5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <https://www.acuitybrands.com/support/warranty/terms-and-conditions>

MOUNTING


The mounting plate is designed to fit on a 4" (102mm) octagonal electrical box using 3.5" (89mm) C/C mounting holes.

MEASUREMENTS

Maximum weight: 11 lbs (5.0 kg)

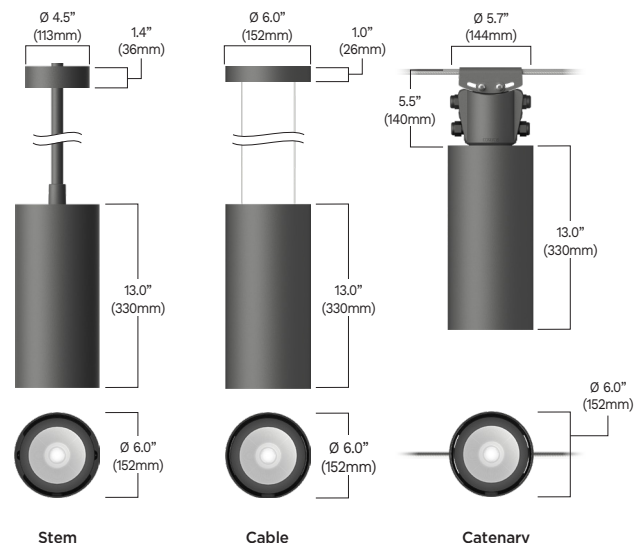

ORDERING CODE

*SERIES	*DOWNLIGHT OUTPUT	*DOWNLIGHT DISTRIBUTION	CCT ³	*VOLTAGE	DOWNLIGHT LENS
SYP605 	<u>Static White</u> L1L20 2249 lm / 21w L1L35 3732 lm / 39w L1L50 4900 lm / 58w <u>RGBW</u> L1RGBW 349 lm / 24w ^{1,6} <u>True Amber</u> L1LK2A 562 lm / 9w ⁵ Delivered lumens calculated at 4000K/80CRI except for RGBW and amber. Flood optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	NR Narrow optic 11° FLD Flood optic 30° VWD Very wide optic 55°	27K 2700K 30K 3000K 35K 3500K 40K 4000K	120 120V 277 277V 347 347V 480 480V HVOLT 347V-480V MVOLT 120V-277V	ESL Elliptical spread lens ^{4,6} SL Solite lens ^{5,6}
	<u>Static White</u> L1L25 2403 lm / 19w L1L45 4400 lm / 39w L1L60 6105 lm / 63w <u>True Amber</u> L1LK3A 662 lm / 9w ⁶ Delivered lumens calculated at 4000K/80CRI except for amber. Type V distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	LD1 Type I distribution ² LD2 Type II distribution ² LD3 Type III distribution ² LD5 Type V distribution ²			
	<u>Very Narrow Distribution</u> L1L06 661 lm / 15w Delivered lumens calculated at 4000K/80CRI. Very narrow optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	VNR Very narrow optic 6°	Required field for all outputs except True amber.		

DOWNLIGHT LOUVERS	*MOUNTING	SUSPENSION LENGTH	CONDUIT COVER	MOUNTING ACCESSORY	CONTROLS
HL Hexcell louver	CAT3 Catenary suspension attachment SPG Black power cord with aircraft cable STM Field-cuttable hang straight stem	12IN 12" 24IN 24" 36IN 36" 48IN 48" 60IN 60" Available up to 240" in 12" increments. Required field for SPG, STM.	SWK Decorative cover for 3/4" conduit junction box ⁷	STC Set of 3 stabilizer cables ⁸	NLTAIR2 nLight AIR 2.0 wireless control ⁹

SURGE PROTECTOR	EMERGENCY	*FINISH	WOOD FINISH ¹³	ENVIRONMENT	HEIGHT MATCHING
SP Surge protector	REM7 Remote emergency battery, 90 min, 7W ¹⁰	BKT Jet black BZT Bronze CHT Champagne DGT Gun metal GRT Titanium gray MST Matte silver SGT Steel gray WHT Snow white CMC Custom matched color ¹¹ RAL RAL color ¹²	ADG American douglas BRC Birch CHN Chestnut CRY Cherry KNP Knotty pine MPL Maple OFL Oak RSW Rosewood TEK Teak WLN Walnut	MG Marine grade paint ¹⁴ NT Natatorium suitable ¹⁵	UH Uniform height matching 18" (457mm) housing

NOTES


- *- Denotes a required field
- 1- Delivered lumens with all channels turned on. RGBW uses DMX512/RDM as a control input. Available only with 30K, 40K. Not available with 347, 480 or HVOLT.
- 2- Not available with ESL, SL, HL.
- 3- For IDA certification compliance, luminaire must be ordered with 3000K or warmer.
- 4- 37" x 80".
- 5- Lumen conversion factor (LCF) 0.9.
- 6- Not available with HL.
- 7- Painted to match fixture color.
- 8- Available only with STM.
- 9- Not available with 480V, HVOLT, CAT3, REM7.
- 10- Remote mount 50ft - 12" (305mm) square enclosure with access cover. The remote enclosure must be interior (cable by others). Not available with 347V, 480V, HVOLT, NLTAIR2, CAT3.
- 11- Contact factory to coordinate custom matching color.
- 12- Specify RAL number.
- 13- Faux wood finish not applied to driver housing, lens frame or accessories. Additional delay required. Not compatible with marine grade paint or natatorium suitable.
- 14- Marine grade paint for harsh, coastal environment and exposure to salt water. Additional delay required.
- 15- Available only in WHT and BKT.

LUMINIS.COM

Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: info@luminis.com
 260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5


TYPICAL PHOTOMETRY SUMMARY

SYP605-L1L06-VNR




Total Lms: 661 Lumens
Total Input Watts: 15 W
Efficacy: 441 Lumens/Watt
BUG: B1-U0-G0
CCT/CRI: 4000K/80
Maximum Candela: 41436 @ 0°

SYP605-L1L50-NR




Total Lms: 4771 Lumens
Total Input Watts: 58 W
Efficacy: 82.3 Lumens/Watt
BUG: B3-U0-G0
CCT/CRI: 4000K/80
Maximum Candela: 56342 @ 0°

SYP605-L1L50-FLD




Total Lms: 4900 Lumens
Total Input Watts: 58 W
Efficacy: 84.5 Lumens/Watt
BUG: B3-U0-G0
CCT/CRI: 4000K/80
Maximum Candela: 12950 @ 0°

SYP605-L1L50-FLD-ESL




Total Lms: 4459 Lumens
Total Input Watts: 58 W
Efficacy: 76.9 Lumens/Watt
BUG: B3-U0-G1
CCT/CRI: 4000K/80
Maximum Candela: 4004 @ 0°

SYP605-L1L50-FLD-HL




Total Lms: 2807 Lumens
Total Input Watts: 58 W
Efficacy: 48.4 Lumens/Watt
BUG: B3-U0-G0
CCT/CRI: 4000K/80
Maximum Candela: 11288 @ 0°

SYP605-L1L50-VWD




Total Lms: 5050 Lumens
Total Input Watts: 58 W
Efficacy: 87.1 Lumens/Watt
BUG: B3-U0-G0
CCT/CRI: 4000K/80
Maximum Candela: 6544 @ 0°H/7.5°V

SYP605-L1L60-LD1




Total Lms: 6457 Lumens
Total Input Watts: 63 W
Efficacy: 102.5 Lumens/Watt
BUG: B2-U0-G1
CCT/CRI: 4000K/80
Maximum Candela: 3296 @ 90°H/50°V

SYP605-L1L60-LD2




Total Lms: 6586 Lumens
Total Input Watts: 63 W
Efficacy: 104.5 Lumens/Watt
BUG: B2-U0-G1
CCT/CRI: 4000K/80
Maximum Candela: 2795 @ 72.5°H/52.5°V

SYP605-L1L60-LD3



Total Lms: 6407 Lumens
Total Input Watts: 63 W
Efficacy: 101.7 Lumens/Watt
BUG: B2-U0-G1
CCT/CRI: 4000K/80
Maximum Candela: 2794 @ 55°H/62.5°V

SYP605-L1L60-LD5




Total Lms: 6105 Lumens
Total Input Watts: 63 W
Efficacy: 96.9 Lumens/Watt
BUG: B2-U0-G1
CCT/CRI: 4000K/80
Maximum Candela: 1791 @ 135°H/62.5°V

LUMEN CONVERSION FACTOR (LCF)


CCT	CRI	LCF
2700K	80	0.91
3000K	80	0.94
3500K	80	0.98
4000K	80	1.00

All Photometry shown use the 80CRI 4000K LEDs.
Please visit our web site www.luminis.com for complete I.E.S. file.


OPTION DETAILS

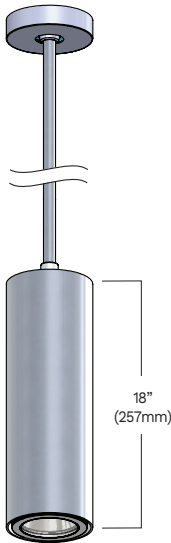


UH
Tall housing to match SYP602 or SYP606.

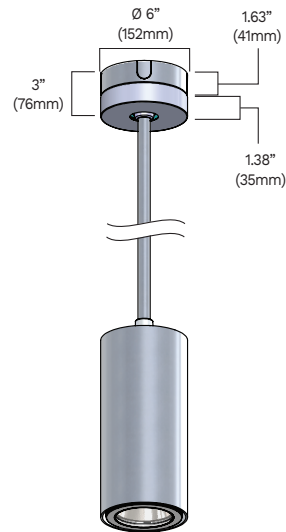


SWK
Adaptor box for surface 3/4" conduit feed (4 sides plus back entry).
NOTE: Shown with stem (STM) option.

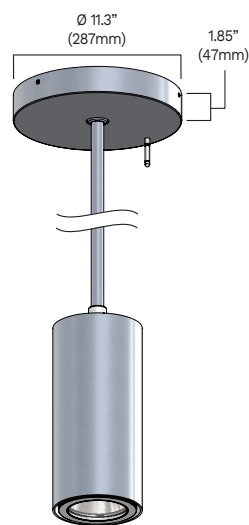

NLTAIR2
nLight AIR 2.0 wireless control mounted on canopy and black antenna.
NOTE: Shown with stem (STM) option.

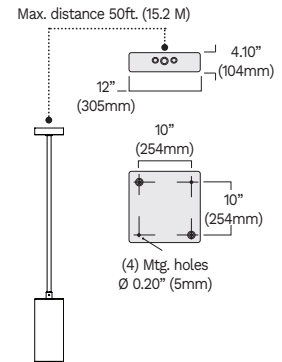

REM7
Remote mount 120/277V emergency battery pack (1110 lm/90 min). Test switch provided within enclosure with 5" (127mm) leads.

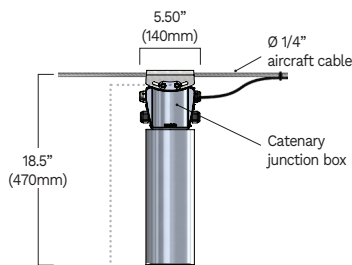

ANGLE ADJUSTMENT MECHANISM




Power cable in:
3 conductor x 14 gauge AWG.
The 2 cable glands located at the top can accommodate a cable ranging from 10mm - 14mm.

Control cable in:
The 2 cable glands on the bottom can accommodate a cable ranging from 6mm - 11mm.

CAT3
Cast aluminum catenary junction box with 4 sealed connectors by Luminis and pre-inserted into housing.

Ready to accept 1/4" or 1/2" stainless steel suspension cable.
Weight: 12.5 lbs (5.7 kg)

(Structural design, power cable, control cable, stainless steel catenary cable, cable fittings, and fittings for mounting to support structure provided by others.)



STM
Standard heavy duty 45° hang straight swivel, with Ø 4.5" (114mm) canopy and universal mounting plate.



STC
Set of three stabilizer cables. For stem mount only.