

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Our recessed LED module is the most economical means to create a well lit environment with exceptional energy efficiency and near zero maintenance. Great for retrofit into existing downlight cans or new construction and remodel applications. Adjustable torsion spring and retention allows fitment into many 5" and 6" cans. The LED module maintains at least 70% light output for 35,000 hours. Indoor and Outdoor Use.

**CONSTRUCTION** — Aluminum spun reflector with deep regression for reduced glare. Combined LED and driver printed circuit board attached. Inner reflector cone funnels light through the pressed-in diffused lens.

**OPTICS** — Diffused lens at end of mixing chamber to provide even light distribution for general illumination, equivalent to 65W BR30 lamp.

Wide flood beam angle at >45°.

**ELECTRICAL** — Center 2 Edge™ (patent pending) technology created for a single point source. Primary power disconnect provided for simple connection to a dedicated LED connector in the housing.

Dimming down to 10%. For compatible dimmers, refer to Compatible Dimmers Chart.

835-lumen E series has an input wattage of 11.9 watts, 70 lumens per watt, equivalent to 65-watt incandescent.

E Series' patent pending driver has zero inrush, which allows power loads to be calculated with actual rated wattages.

Example: 50 units of 65BEMW LED fixtures can be installed in line with a 600-watt dimmer. 600W/11.9W = 50 fixtures.

**INSTALLATION** — Suitable for installation in standard and shallow-height rough-in sections.

E26 socket adapter ships standard, except product shipping to California.

Twin torsion springs ensure easy installation for 5" and 6" recessed housings.

**LISTINGS** — CSA certified to US and Canadian safety standards. ENERGY STAR® certified. Can be used to comply with California Title 24 Part 6 High Efficacy LED Light Source Requirements. Wet location listed. WSEC ASTM E283 for Air-Tight (with IC housings).

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/support/customer-support/terms-and-conditions](http://www.acuitybrands.com/support/customer-support/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

**PATENTS PENDING.**

Catalog Number
Notes
Type



65BEMW



65SEMW

### LED Recessed Downlighting

# 65BE/65SE

5" / 6" LED Module

IC/Non-IC  
Retrofit



E26 adaptor

#### Specifications


Aperture: 5-5/8 (14.3)

Ceiling opening: Determined by rough-in

Overlap trim: 7-5/8 (19.4)

Height: 2-3/4 (7.1)

All dimensions are inches (centimeters) unless otherwise indicated.

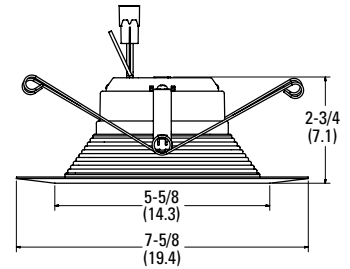

### ORDERING INFORMATION

For shortest lead times, configure product using **bolded** options.

**Example:** 65BEMW LED 27K 90CRI L7XLED T24

Series/Finish	Lamp	CCT / W / Lumens <sup>1</sup>	CRI	Voltage	Options
<b>65BEMW</b> 5" / 6" Baffle LED module, matte white	<b>LED</b>	<b>27K</b> 2700 K / 12.1W / 750L <b>30K</b> 3000 K / 11.9W / 835L	<b>90CRI</b> 90CRI	(blank) 120V	L/SKTWHIP No E26 Adapter (CA only) <sup>2</sup>
<b>65SEMW</b> 5" / 6" Smooth LED module, matte white		<b>35K</b> 3500 K / 11.7W / 825L <b>40K</b> 4000 K / 11.9W / 845L <sup>3</sup> <b>50K</b> 5000 K / 12.12W / 825L <sup>4</sup>			

#### Housing options

<b>L7XLED T24</b> 6" new construction rough-in LED base	<b>LC6</b> 6" new construction rough-in <sup>5</sup>	<b>IC21</b> 6" IC shallow new construction housing <sup>5</sup>
L7XRLED T24 6" remodel rough-in LED base	LCP 6" new construction shallow rough-in <sup>5</sup>	<b>IC21R</b> 6" IC shallow remodel housing <sup>5</sup>
LC6LED T24 6" new construction rough-in LED base	<b>LSLED T24</b> 5" new construction rough-in LED base	<b>IC22</b> 6" IC new construction housing <sup>5</sup>
<b>L7X</b> 6" new construction rough-in <sup>5</sup>	LSRLED T24 5" remodel rough-in LED base	<b>IC22R</b> 6" IC remodel housing <sup>5</sup>
<b>L7XR</b> 6" remodel rough-in <sup>5</sup>	<b>L5</b> 5" new construction rough-in <sup>5</sup>	<b>IC23</b> 6" IC new construction housing, no plate <sup>5</sup>
<b>L7XP</b> 6" new construction shallow rough-in <sup>5</sup>	<b>LSR</b> 5" new construction rough-in <sup>5</sup>	<b>IC23R</b> 6" IC remodel housing, no plate <sup>5</sup>
<b>L7XPR</b> 6" remodel shallow rough-in <sup>5</sup>		

**Accessories:** Order as separate catalog number.

<b>TSA6 J6</b> 6" torsion spring adaptor (pack of 6)	RK2 CG52178 E26 E SERIES SKT ADAPTER U	E26 Adapter (Single Unit Pack)
	RK2 CG52178 E26 E SERIES SKT ADAPTER J10	E26 Adapter (Pack of 10)
	RK2 CG52178 E26 E SERIES SKT ADAPTER J25	E26 Adapter (Pack of 25)

#### Notes

- Total system delivered lumens.
- L/SKTWHIP must be selected for standard lumen outputs for product shipping to California.
- Not available for Smooth option.
- Not available in Baffle option.
- Must be ordered on a separate line.

# 5"/6" LED Module

## TRIM INSERTS

TRIM INSERTS (for field configuration; ordered separately)

Example: 65SEBN R4


Series/Finish				Packaging	
65BEMB	6" Baffle, Matte Black	65SEMB	6" Smooth, Matte Black	R4	Retail Pack of 4 units
65BEBN	6" Baffle, Brush Nickel	65SEBN	6" Smooth, Brush Nickel		
65BEORB	6" Baffle, Oil-Rubbed Bronze	65SEORB	6" Smooth, Oil-Rubbed Bronze		



6" Baffle, Matte Black (65BEMB)



6" Baffle, Brush Nickel (65BEBN)



6" Baffle, Oil-Rubbed Bronze (65BEORB)



6" Smooth, Matte Black (65SEMB)



6" Smooth, Brush Nickel (65SEBN)



6" Smooth, Oil-Rubbed Bronze (65SEORB)



Pre-Install color finish trim insert over white 6" E Series Module.



Press down color finish tabs for post-installation to create final LED 6" module.

# 5"/6" LED Module

## PHOTOMETRICS

### Distribution Curve


### Distribution Data

### Output Data


### Coefficient of Utilization

### Illuminance Data at 30" Above Floor for a Single Luminaire


**65BEMW LED, 27K, input watts: 11.9, delivered lumens: 772, LM/W = 62, test no. ISF 35429P1, tested in accordance with IESNA LM 79-08**

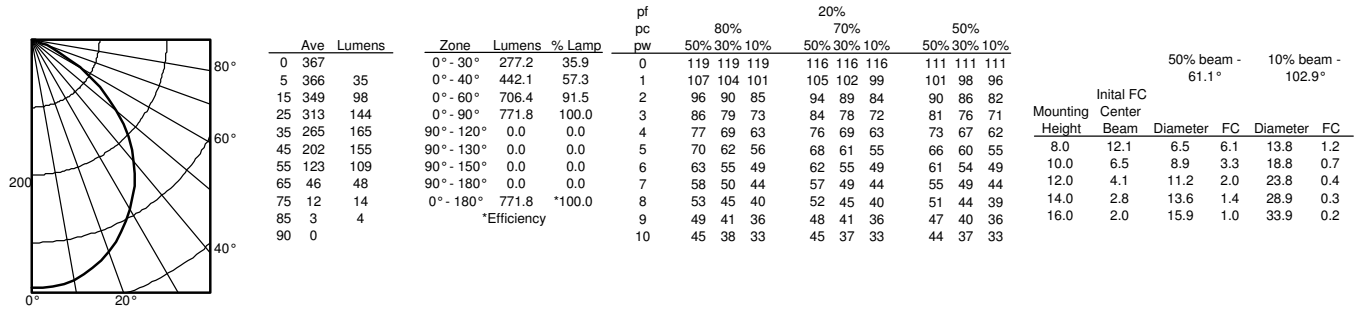


**65BEMW LED, 30K, input watts: 11.9, delivered lumens: 859, LM/W = 70, test no. ISF 35429, tested in accordance with IESNA LM 79-08**

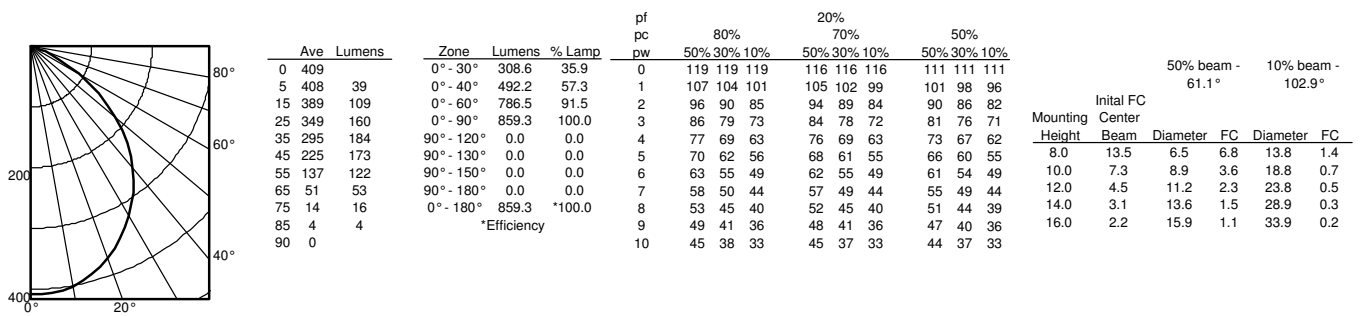

**65BEMW LED, 35K, input watts: 11.9, delivered lumens: 849, LM/W = 71, test no. ISF 35429P2, tested in accordance with IESNA LM 79-08**

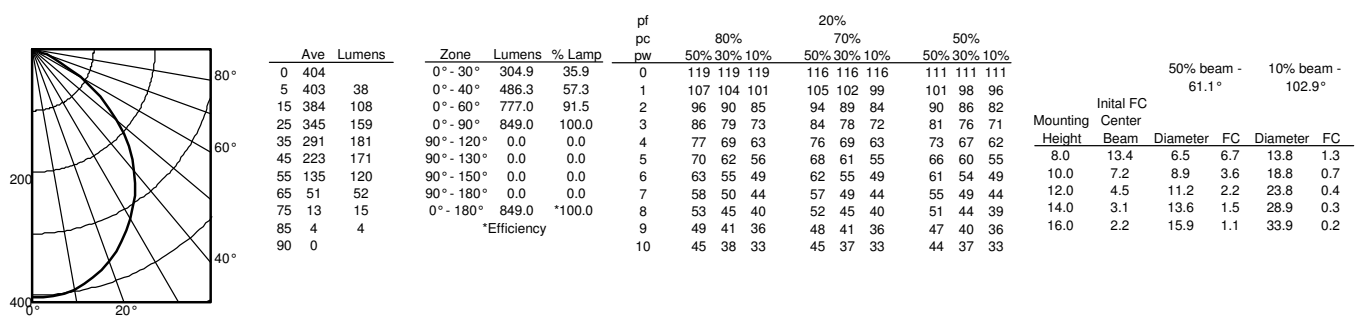

**65BEMW LED, 40K, input watts: 11.9, delivered lumens: 870, LM/W = 71, test no. ISF 35429P3, tested in accordance with IESNA LM 79-08**

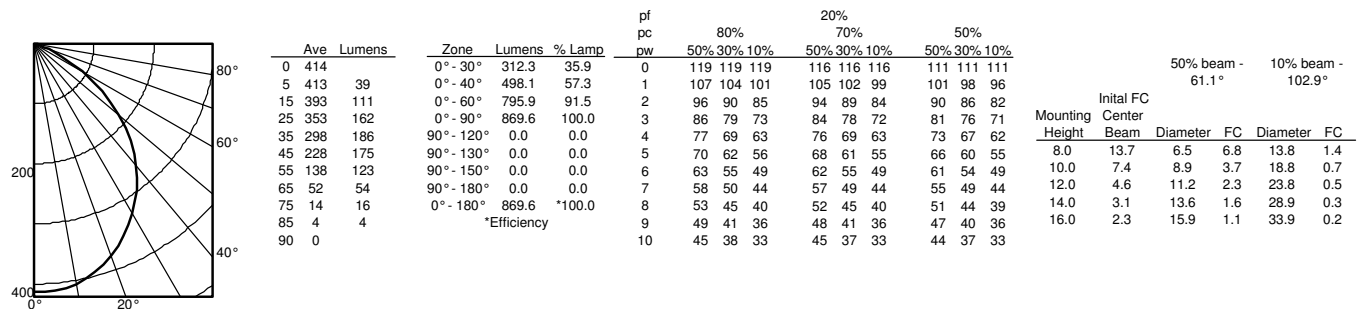

# 5"/6" LED Module

## ADDITIONAL DATA 65BEMW/65SEMW LED 27K

6"/5" ENERGY DATA	
Lumens	750
Color Temperature	2700K
CRI	90
Lu/Watts	62
Operating temp	-20°C (-4°F) to 40°C (104°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	12.1W
Input power	12.1W
Input current	0.1A

## ADDITIONAL DATA 65BEMW/65SEMW LED 30K

6"/5" ENERGY DATA	
Lumens	835
Color Temperature	3000K
CRI	90
Lu/Watts	70
Operating temp	-20°C (-4°F) to 40°C (104°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.9W
Input power	11.9W
Input current	0.1A

## ADDITIONAL DATA 65BEMW/65SEMW LED 35K

6"/5" ENERGY DATA	
Lumens	825
Color Temperature	3500K
CRI	90
Lu/Watts	70
Operating temp	-20°C (-4°F) to 40°C (104°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.7W
Input power	11.7W
Input current	0.1A

## ADDITIONAL DATA 65BEMW LED 40K

6"/5" ENERGY DATA	
Lumens	845
Color Temperature	4000K
CRI	90
Lu/Watts	71
Operating temp	-20°C (-4°F) to 40°C (104°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	11.9W
Input power	11.9W
Input current	0.1A

## ADDITIONAL DATA 65SEMW LED 50K

6"/5" ENERGY DATA	
Lumens	825
Color Temperature	5000K
CRI	90
Lu/Watts	68
Operating temp	-20°C (-4°F) to 40°C (104°F)
EMI/RFI	FCC Title 47 CFR, Part 15, Class B
Sound rating	Class A Standards
Input voltage	120V
Min. power factor	0.99
Input frequency	50/60 Hz
Rated wattage	12.12W
Input power	12.12W
Input current	0.1A