

## **FEATURES & SPECIFICATIONS**

INTENDED USE — To be powered by Quantum ELMLT series unit (6V, 9.6V, 12V or 18V) with adequate battery capacity as part of an emergency lighting system providing light for the path of egress. Remote lamp head matches the appearance of the Quantum ELMLT series units. Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate. Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.

**CONSTRUCTION** — Single or twin heads available. Fully adjustable lamp heads to meet all aiming requirements. Strong, compact and corrosion-resistant with a UL94V-0 flame rating. Constructed of UV-stabilized thermoplastic that resists discoloration by natural or artificial sunlight.

## US Patent No. D484,272.

OPTICS — LED, available in 5W or 6W lamp.

The typical life of the LED is 10 years.


**INSTALLATION** — Universal mounting base for use with single- or twin-head applications. Mounts to a single-gang switch box.

LISTINGS — UL Listed. Standard damp location listed -25° to 40°C (-13° to 104°F).

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <a href="http://www.acuitybrands.com/support/warranty/terms-and-conditions">www.acuitybrands.com/support/warranty/terms-and-conditions</a>

**NOTE:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

## **FIXTURE DIMENSIONS**

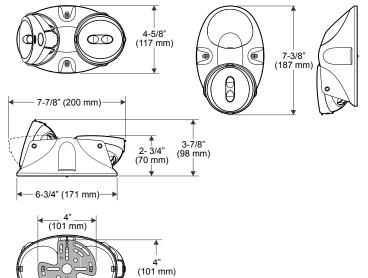

Mounting Bracket

|  | ELA LT24 LP06VS | 6 - 18 | 5.5 |  |  |  |
|--|-----------------|--------|-----|--|--|--|
| Recommended output wattage at recommended input voltage. |                 |        |     |  |  |  |

ELA LT24 LP05VS

Input volts

6 - 18

**Output watts** 

5.1

|   | Specifications    |                |  |  |
|---|-------------------|----------------|--|--|
|   | <u>Single</u>     | Twin           |  |  |
| Length:   | 7-3/8" (187mm)    | 7-7/8" (200mm) |  |  |
| Depth:<br>Height:   | 4-5/8" (117mm)    | 4-5/8" (117mm) |  |  |
|   | 2-3/4" (70mm)     | 2-3.4" (70mm)  |  |  |
| Shipping Weight:  | 1-3/4lbs(0.77 kg) | 2lbs(0.91 kg)  |  |  |
| All dimensions and in these (as when shows) and are sub-amatics in directed |                   |                |  |  |

All dimensions are inches (centimeters) unless otherwise indicated

| ORDERING IN | ORDERING INFORMATION Lead times will vary depending on options selected. Consult with your sales representative. Example: ELA WT LT24 LP06VS |                      |   |  |  |  |
|-------------|--|----------------------|---|--|--|--|
| ELA         |  |                      | LT24  |  |  |  |
| Series      | Housing color  | Number of heads      | Fixture   | Distribution   |  |  |
| ELA         | W White  | SGL Single<br>T Twin | LT24 Quantum LED LT24 series adjustable lamp head | LP05VS Linear pattern 5W lamp, voltage-sensing, 6-18V DC input<br>LP06VS Linear pattern 5.5W lamp, voltage sensing, 6-18V DC input |  |  |



**Unit Accessories** 

**Remote Fixture** 

ELA LT24

**Adjustable LED Lamp Head** 



24

**N** 



Catalog

Туре

1

(Single)