

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

To be powered by 6 or 12 volt battery equipment as part of an emergency lighting system providing light for the path of egress.

### CONSTRUCTION

Single or twin heads available.

Fully adjustable lamp heads meet all aiming requirements.

Lamp head and mounting plate constructed of lightweight thermoplastic.

Removable bezel and slip-on lamp terminals simplify maintenance and lamp replacement.

Strong, compact and corrosion-resistant with a UL94V-0 flame rating.

### OPTICS

Glass sealed-beam PAR36 lamp(s).

### INSTALLATION

Universal mounting plate for use with single or twin-head applications.


Mounts to single-gang switch box.

### LISTINGS

Listed in accordance with UL 1598 and CSA C22.2 No. 250.

**Note:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

### Unit Accessories

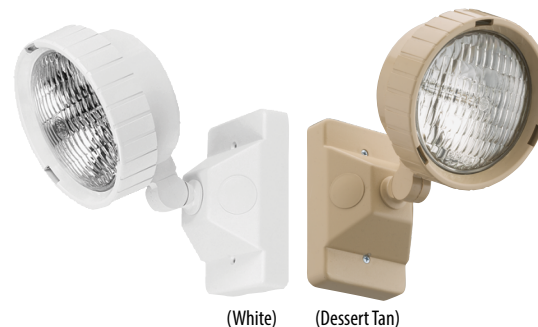

# ELA

Remote Fixture

### Specifications

	Mounting Base	Single	Twin
Length:	3-1/8" (79mm)	-3/4" (121mm)	13" (330mm)
Depth:		4-9/16" (116mm)	3-11/16" (93mm)
Height:	5" (127mm)	7-3/4" (197mm)	6-5/8" (168mm)
Shipping Weight:		1-3/4lbs(0.77 kg)	2lbs(0.91 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

For shortest lead times, configure product using **standard options (show in bold)**.

**Example:** ELA N1206

Series	Housing color	Number of heads	Fixture	Lamp type
<b>ELA</b>	<b>(blank)</b> Desert tan W Ivory white B Black ITN Instrument tan	<b>(blank)</b> Single T Twin	<b>(blank)</b> Standard PAR36 sealed-beam	<u>PAR36 sealed-beam</u> N1206 12W/6V incandescent H0606 6W/6V halogen N2512 25W/12V incandescent H0806 8W/6V halogen H1206 12W/6V halogen <b>H0812</b> 8W/12V halogen H1212 12W/12V halogen