


# MARK ARCHITECTURAL LIGHTING™

## Slot 2 LED Recessed Linear

Type:

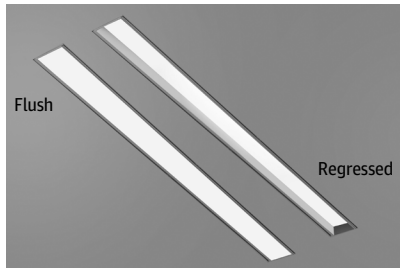

Slot 2 LED takes both form and function a step further with increased efficacy and integral controls creating a digitally addressable luminaire that is perfect where visually harmonious illumination and energy efficiency are desired.

Slot 2 LED is the ideal choice for spaces that emphasize lines and clean contemporary design. It is a perfect fit for Armstrong TechZone™ ceiling systems. A regressed lens option provides added dimension to the sleek, slender design and the flush lens now has a Wet Label option.

Project:

Catalog Number:

DO NOT TYPE HERE. Autopopulated field.

### Specification Features

#### Housing

Nominal 2" x 2', 3', 4', 5', 6', 7', 8' and continuous rows in 1" increments as standard, upper housing fabricated from cold-rolled steel with extruded aluminum ceiling trim.

#### Finish

Polyester powder coat painted finish.

#### Reflector

Precision-formed steel; high reflectance matte white powder coat; 93% reflectivity.

#### Shielding

Flush Lens: Snap-in 90% transmissive satin acrylic lens. Lens is not sealed or gasketed.

Regressed Lens: Lay-in 90% transmissive satin acrylic lens.

#### Mounting

Recessed. Available for sheetrock, 9/16" slot grid or 15/16" inverted tee ceilings, or 9/16" inverted tee.

#### Certification

CSA certified to meet U.S. and Canadian standards (UL1598 and UL8750). This product is IC rated. Optional Damp (DPL) or Wet (WL) location listings available with specified nomenclature. Wet location listing is suitable for covered ceiling mount installation only, where any water exposure is beneath the non-porous mount surface.

#### Government Procurement

BAA - Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

#### Fixture Performance - SL2L\*

Lumens Output Fixture Style	400 LMF		600 LMF**		800LMF**		1000LMF	
	RLP	FLP	RLP	FLP	RLP	FLP	RLP	FLP
Delivered Lumens/FT	234	308	404	533	534	705	654	862
Input Watts/FT	4	4	6	6	8	8	11	11
Lumen/Watt	68	89	69	91	67	88	62	82

\* CCT (35K)

\* Consult factory for customized lumen output and wattage

\*\*Based on calculated values

Note: UGR data available on Page 5

BABA - Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

#### Warranty

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

#### A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning when used with Acuity Brands controls products.

All configurations of this luminaire are calibrated and tested to meet the Acuity Brands' specification for chromatic consistency - including color rendering, color fidelity, and color temperature tolerance around standard CIE chromaticity coordinates.


To learn more about Acuity A+ standards, specifications, and testing, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus)

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

### Technical Drawing

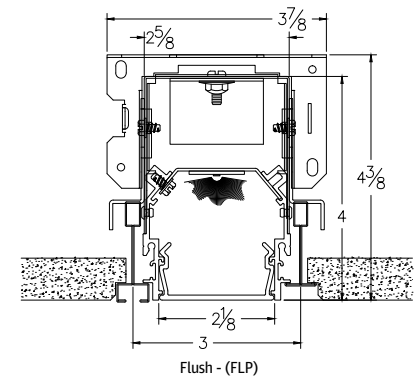

#### LED Components

Linear: Nichia® - 757 Series LED chips (available in 80 or 90 CRI)

#### LED Life


Rated 65,000 hours (L80) at 25 °C ambient temperature.

#### Color Consistency

The Acuity Brands circuit boards for the linear LED components use a precise binning algorithm which creates a consistent color temperature from board to board. Color variation is no greater than a 2.5 Step MacAdam (2.5SDCM) along the black body locus from board to board.

#### Driver

eldoLED constant current driver options delivers ultra-smooth dimming resolution from 100% to 0.1%, while assuring flicker free, low current inrush, 89% efficiency and low EMI.

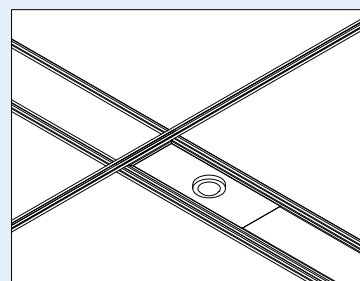


Occupancy Sensor (PDT) and/or Photocell (ADC)

#### Integrated Controls

Optional nLight® embedded controls make luminaire addressable- allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Simply connect all the nLight enabled control devices using standard CAT5 Cabling. (Input option: NLIGHT)

#### Photometry

For photometry information refer to [www.marklighting.com](http://www.marklighting.com).

 Design Select options indicated by this color background.

**Ordering**

Example: SL2L LOP 4FT FLP FL 80CRI 30K 600LMF DARK 277 EC NLIGHT

--	--	--	--	--	--

Series	Linear Length Plan	Total Run Length	Fixture Style	Ceiling Trim	Direct Light Source Color Rendering																											
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>SL2L</b> Slot 2 LED</td> <td style="background-color: #e0e0e0;">Linear Recessed</td> </tr> </table>	<b>SL2L</b> Slot 2 LED	Linear Recessed	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>LOP</b> Linear</td> <td style="background-color: #e0e0e0;">Optimized Plan</td> </tr> </table>	<b>LOP</b> Linear	Optimized Plan	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td><b>2FT</b> 2'</td> <td><b>7FT</b> 7'</td> </tr> <tr> <td><b>3FT</b> 3'</td> <td><b>8FT</b> 8'</td> </tr> <tr> <td><b>4FT</b> 4'</td> <td><b>_FT_</b> *Specify continuous linear feet in 1" increments (7FT6 = 7FT 6IN)</td> </tr> <tr> <td><b>5FT</b> 5'</td> <td><b>_FT_</b> **Specify continuous linear feet in 1 foot increments</td> </tr> <tr> <td><b>6FT</b> 6'</td> <td></td> </tr> </table>	<b>2FT</b> 2'	<b>7FT</b> 7'	<b>3FT</b> 3'	<b>8FT</b> 8'	<b>4FT</b> 4'	<b>_FT_</b> *Specify continuous linear feet in 1" increments (7FT6 = 7FT 6IN)	<b>5FT</b> 5'	<b>_FT_</b> **Specify continuous linear feet in 1 foot increments	<b>6FT</b> 6'		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>RLP</b><sup>13</sup> Regressed Lens</td> <td style="background-color: #e0e0e0;"><b>FL</b><sup>4</sup> 5/8" Flange(sheetrock)</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>FLP</b><sup>2</sup> Flush Lens</td> <td style="background-color: #e0e0e0;"><b>FLINB</b><sup>21,22</sup> 5/8" Flange (sheetrock) Install From Below</td> </tr> <tr> <td></td> <td style="background-color: #e0e0e0;"><b>TG</b> 9/16" or 15/16" Flat or Inverted Tee</td> </tr> <tr> <td></td> <td style="background-color: #e0e0e0;"><b>GB</b><sup>3</sup> Trimless (sheetrock)</td> </tr> <tr> <td></td> <td style="background-color: #e0e0e0;"><b>WFL</b> Perimeter Mount, 5/8" Flange (Sheetrock)</td> </tr> <tr> <td></td> <td style="background-color: #e0e0e0;"><b>WTG</b> 9/16" Flat or Inverted Tee, Perimeter Mount</td> </tr> </table> <p><small>*For metal pan, hard wood or other ceiling types consult factory.</small></p>	<b>RLP</b> <sup>13</sup> Regressed Lens	<b>FL</b> <sup>4</sup> 5/8" Flange(sheetrock)	<b>FLP</b> <sup>2</sup> Flush Lens	<b>FLINB</b> <sup>21,22</sup> 5/8" Flange (sheetrock) Install From Below		<b>TG</b> 9/16" or 15/16" Flat or Inverted Tee		<b>GB</b> <sup>3</sup> Trimless (sheetrock)		<b>WFL</b> Perimeter Mount, 5/8" Flange (Sheetrock)		<b>WTG</b> 9/16" Flat or Inverted Tee, Perimeter Mount	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>80CRI</b> 80 CRI</td> <td style="background-color: #e0e0e0;"><b>90CRI</b> 90 CRI</td> </tr> </table>	<b>80CRI</b> 80 CRI	<b>90CRI</b> 90 CRI
<b>SL2L</b> Slot 2 LED	Linear Recessed																															
<b>LOP</b> Linear	Optimized Plan																															
<b>2FT</b> 2'	<b>7FT</b> 7'																															
<b>3FT</b> 3'	<b>8FT</b> 8'																															
<b>4FT</b> 4'	<b>_FT_</b> *Specify continuous linear feet in 1" increments (7FT6 = 7FT 6IN)																															
<b>5FT</b> 5'	<b>_FT_</b> **Specify continuous linear feet in 1 foot increments																															
<b>6FT</b> 6'																																
<b>RLP</b> <sup>13</sup> Regressed Lens	<b>FL</b> <sup>4</sup> 5/8" Flange(sheetrock)																															
<b>FLP</b> <sup>2</sup> Flush Lens	<b>FLINB</b> <sup>21,22</sup> 5/8" Flange (sheetrock) Install From Below																															
	<b>TG</b> 9/16" or 15/16" Flat or Inverted Tee																															
	<b>GB</b> <sup>3</sup> Trimless (sheetrock)																															
	<b>WFL</b> Perimeter Mount, 5/8" Flange (Sheetrock)																															
	<b>WTG</b> 9/16" Flat or Inverted Tee, Perimeter Mount																															
<b>80CRI</b> 80 CRI	<b>90CRI</b> 90 CRI																															

--	--	--	--	--	--

Direct LED Color Temp	Direct LED Light Output	Direct Distribution	Minimum Dimming Level	Voltage	Finish	Emergency Options																																
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>27K</b><sup>*</sup> 2700K</td> <td style="background-color: #e0e0e0;"><b>30K</b> 3000K</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>35K</b> 3500K</td> <td style="background-color: #e0e0e0;"><b>40K</b> 4000K</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>50K</b><sup>*</sup> 5000K</td> <td></td> </tr> </table>	<b>27K</b> <sup>*</sup> 2700K	<b>30K</b> 3000K	<b>35K</b> 3500K	<b>40K</b> 4000K	<b>50K</b> <sup>*</sup> 5000K		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>400LMF</b> 400 Lumens per FT</td> <td style="background-color: #e0e0e0;"><b>600LMF</b> 600 Lumens per FT</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>800LMF</b> 800 Lumens per FT</td> <td style="background-color: #e0e0e0;"><b>1000LMF</b> 1000 Lumens per FT</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>_LMF</b><sup>*9</sup> ## Lumens per FT (Limited to 300LMF to 1000LMF in 50LMF increments)</td> <td></td> </tr> </table>	<b>400LMF</b> 400 Lumens per FT	<b>600LMF</b> 600 Lumens per FT	<b>800LMF</b> 800 Lumens per FT	<b>1000LMF</b> 1000 Lumens per FT	<b>_LMF</b> <sup>*9</sup> ## Lumens per FT (Limited to 300LMF to 1000LMF in 50LMF increments)		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>(blank)</b> Standard Distribution</td> <td style="background-color: #e0e0e0;"><b>WW</b><sup>5</sup> Wall Wash</td> </tr> </table>	<b>(blank)</b> Standard Distribution	<b>WW</b> <sup>5</sup> Wall Wash	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>NODIM</b> Non - Dim</td> <td style="background-color: #e0e0e0;"><b>MIN1</b> Constant current, dimming to 1%</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>DARK</b> Constant current, dimming to 0.1%</td> <td style="background-color: #e0e0e0;"><b>MIN10</b><sup>15</sup> Constant current, dimming to 10%</td> </tr> </table>	<b>NODIM</b> Non - Dim	<b>MIN1</b> Constant current, dimming to 1%	<b>DARK</b> Constant current, dimming to 0.1%	<b>MIN10</b> <sup>15</sup> Constant current, dimming to 10%	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>120</b> 120V</td> <td style="background-color: #e0e0e0;"><b>277</b> 277V</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>347</b><sup>7</sup> 347V</td> <td></td> </tr> </table>	<b>120</b> 120V	<b>277</b> 277V	<b>347</b> <sup>7</sup> 347V		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>(blank)</b> White (satin)</td> <td style="background-color: #e0e0e0;"><b>xxx/BLKT</b> Black (satin)</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>xxx/SLVT</b> Silver (satin)</td> <td style="background-color: #e0e0e0;"><b>xxx/AMF</b> Anti-Microbial White (satin)</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>xxx/RALTB</b> <a href="#">RAL paint finish</a></td> <td></td> </tr> </table> <p><small>xxx = fill in with the appropriate ceiling trim. Only trims are painted. RALTB is for pricing only. Replace with applicable RAL number and texture when placing order.</small></p>	<b>(blank)</b> White (satin)	<b>xxx/BLKT</b> Black (satin)	<b>xxx/SLVT</b> Silver (satin)	<b>xxx/AMF</b> Anti-Microbial White (satin)	<b>xxx/RALTB</b> <a href="#">RAL paint finish</a>		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>(blank)</b> No Emergency</td> <td style="background-color: #e0e0e0;"><b>_E10WLC</b><sup>8</sup> Number of 4ft Emergency Section(s) with battery pack</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>_EC</b><sup>10</sup> # of Emergency Circuits</td> <td style="background-color: #e0e0e0;"><b>WEC</b> Entire run on EC</td> </tr> </table>	<b>(blank)</b> No Emergency	<b>_E10WLC</b> <sup>8</sup> Number of 4ft Emergency Section(s) with battery pack	<b>_EC</b> <sup>10</sup> # of Emergency Circuits	<b>WEC</b> Entire run on EC
<b>27K</b> <sup>*</sup> 2700K	<b>30K</b> 3000K																																					
<b>35K</b> 3500K	<b>40K</b> 4000K																																					
<b>50K</b> <sup>*</sup> 5000K																																						
<b>400LMF</b> 400 Lumens per FT	<b>600LMF</b> 600 Lumens per FT																																					
<b>800LMF</b> 800 Lumens per FT	<b>1000LMF</b> 1000 Lumens per FT																																					
<b>_LMF</b> <sup>*9</sup> ## Lumens per FT (Limited to 300LMF to 1000LMF in 50LMF increments)																																						
<b>(blank)</b> Standard Distribution	<b>WW</b> <sup>5</sup> Wall Wash																																					
<b>NODIM</b> Non - Dim	<b>MIN1</b> Constant current, dimming to 1%																																					
<b>DARK</b> Constant current, dimming to 0.1%	<b>MIN10</b> <sup>15</sup> Constant current, dimming to 10%																																					
<b>120</b> 120V	<b>277</b> 277V																																					
<b>347</b> <sup>7</sup> 347V																																						
<b>(blank)</b> White (satin)	<b>xxx/BLKT</b> Black (satin)																																					
<b>xxx/SLVT</b> Silver (satin)	<b>xxx/AMF</b> Anti-Microbial White (satin)																																					
<b>xxx/RALTB</b> <a href="#">RAL paint finish</a>																																						
<b>(blank)</b> No Emergency	<b>_E10WLC</b> <sup>8</sup> Number of 4ft Emergency Section(s) with battery pack																																					
<b>_EC</b> <sup>10</sup> # of Emergency Circuits	<b>WEC</b> Entire run on EC																																					


--	--	--	--	--	--

Control Input	Primary Sensor <sup>12</sup>	Secondary Sensor <sup>12</sup>	Tertiary Zone	Options																										
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>(blank)</b> Non-dim<sup>11</sup></td> <td style="background-color: #e0e0e0;"><b>ZT</b> 0 10V</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>NLIGHT</b> nLight enabled</td> <td style="background-color: #e0e0e0;"><b>NLTAIR2</b><sup>17</sup> nLight Air (Wireless Enabled)</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>ECOD</b><sup>*,16</sup> Lutron Hi-Lume digital driver</td> <td style="background-color: #e0e0e0;"><b>DALI</b><sup>19</sup> Dali</td> </tr> </table>	<b>(blank)</b> Non-dim <sup>11</sup>	<b>ZT</b> 0 10V	<b>NLIGHT</b> nLight enabled	<b>NLTAIR2</b> <sup>17</sup> nLight Air (Wireless Enabled)	<b>ECOD</b> <sup>*,16</sup> Lutron Hi-Lume digital driver	<b>DALI</b> <sup>19</sup> Dali	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>(blank)</b> Single Zone, No Sensor</td> <td style="background-color: #e0e0e0;"><b>NS</b> Multi-zone, No Sensor Main Zone, No Sensors</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>PDT</b><sup>13</sup> Dual Technology Occupancy Sensor, PIR and Microphonics Sensor, No Sensors</td> <td style="background-color: #e0e0e0;"><b>ADC</b><sup>13</sup> Daylight Dimming Sensor, No Sensors</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>API</b><sup>14</sup> Passive Infrared Occupancy Sensor and Daylight Dimming Sensor, No Sensors</td> <td style="background-color: #e0e0e0;"><b>APD</b><sup>14</sup> Dual Technology Occupancy Sensor and Daylight Dimming Sensor, No Sensors</td> </tr> </table>	<b>(blank)</b> Single Zone, No Sensor	<b>NS</b> Multi-zone, No Sensor Main Zone, No Sensors	<b>PDT</b> <sup>13</sup> Dual Technology Occupancy Sensor, PIR and Microphonics Sensor, No Sensors	<b>ADC</b> <sup>13</sup> Daylight Dimming Sensor, No Sensors	<b>API</b> <sup>14</sup> Passive Infrared Occupancy Sensor and Daylight Dimming Sensor, No Sensors	<b>APD</b> <sup>14</sup> Dual Technology Occupancy Sensor and Daylight Dimming Sensor, No Sensors	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>(blank)</b> No additional zones/sensors</td> <td style="background-color: #e0e0e0;"><b>SNS</b> Multi-zone, with no sensor in secondary zone, No Sensors</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>SPDT</b><sup>13</sup> Dual Technology Occupancy Sensor, PIR and Microphonics Sensor, No Sensors</td> <td style="background-color: #e0e0e0;"><b>SADC</b><sup>13</sup> Daylight Dimming Sensor, No Sensors</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>SAPI</b><sup>14</sup> Passive Infrared Occupancy Sensor and Daylight Dimming Sensor, No Sensors</td> <td style="background-color: #e0e0e0;"><b>SAPD</b><sup>14</sup> Dual Technology Occupancy Sensor and Daylight Dimming Sensor, No Sensors</td> </tr> </table>	<b>(blank)</b> No additional zones/sensors	<b>SNS</b> Multi-zone, with no sensor in secondary zone, No Sensors	<b>SPDT</b> <sup>13</sup> Dual Technology Occupancy Sensor, PIR and Microphonics Sensor, No Sensors	<b>SADC</b> <sup>13</sup> Daylight Dimming Sensor, No Sensors	<b>SAPI</b> <sup>14</sup> Passive Infrared Occupancy Sensor and Daylight Dimming Sensor, No Sensors	<b>SAPD</b> <sup>14</sup> Dual Technology Occupancy Sensor and Daylight Dimming Sensor, No Sensors	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>(blank)</b> No additional zones/sensors</td> <td style="background-color: #e0e0e0;"><b>TNS</b> Multi-zone, with no sensor in tertiary zone</td> </tr> </table>	<b>(blank)</b> No additional zones/sensors	<b>TNS</b> Multi-zone, with no sensor in tertiary zone	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0e0e0;"><b>CP</b><sup>18</sup> Chicago Plenum</td> <td style="background-color: #e0e0e0;"><b>BAA</b> Buy America(n) Act and/or Build America Buy America Qualified</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>WL</b><sup>3,20</sup> Wet Location Listing</td> <td style="background-color: #e0e0e0;"><b>DPL</b><sup>20</sup> Damp Location Listing</td> </tr> <tr> <td style="background-color: #e0e0e0;"><b>PWS</b> 6' Pre-Wire, 3/8" Diameter, 18 Gauge</td> <td></td> </tr> </table>	<b>CP</b> <sup>18</sup> Chicago Plenum	<b>BAA</b> Buy America(n) Act and/or Build America Buy America Qualified	<b>WL</b> <sup>3,20</sup> Wet Location Listing	<b>DPL</b> <sup>20</sup> Damp Location Listing	<b>PWS</b> 6' Pre-Wire, 3/8" Diameter, 18 Gauge	
<b>(blank)</b> Non-dim <sup>11</sup>	<b>ZT</b> 0 10V																													
<b>NLIGHT</b> nLight enabled	<b>NLTAIR2</b> <sup>17</sup> nLight Air (Wireless Enabled)																													
<b>ECOD</b> <sup>*,16</sup> Lutron Hi-Lume digital driver	<b>DALI</b> <sup>19</sup> Dali																													
<b>(blank)</b> Single Zone, No Sensor	<b>NS</b> Multi-zone, No Sensor Main Zone, No Sensors																													
<b>PDT</b> <sup>13</sup> Dual Technology Occupancy Sensor, PIR and Microphonics Sensor, No Sensors	<b>ADC</b> <sup>13</sup> Daylight Dimming Sensor, No Sensors																													
<b>API</b> <sup>14</sup> Passive Infrared Occupancy Sensor and Daylight Dimming Sensor, No Sensors	<b>APD</b> <sup>14</sup> Dual Technology Occupancy Sensor and Daylight Dimming Sensor, No Sensors																													
<b>(blank)</b> No additional zones/sensors	<b>SNS</b> Multi-zone, with no sensor in secondary zone, No Sensors																													
<b>SPDT</b> <sup>13</sup> Dual Technology Occupancy Sensor, PIR and Microphonics Sensor, No Sensors	<b>SADC</b> <sup>13</sup> Daylight Dimming Sensor, No Sensors																													
<b>SAPI</b> <sup>14</sup> Passive Infrared Occupancy Sensor and Daylight Dimming Sensor, No Sensors	<b>SAPD</b> <sup>14</sup> Dual Technology Occupancy Sensor and Daylight Dimming Sensor, No Sensors																													
<b>(blank)</b> No additional zones/sensors	<b>TNS</b> Multi-zone, with no sensor in tertiary zone																													
<b>CP</b> <sup>18</sup> Chicago Plenum	<b>BAA</b> Buy America(n) Act and/or Build America Buy America Qualified																													
<b>WL</b> <sup>3,20</sup> Wet Location Listing	<b>DPL</b> <sup>20</sup> Damp Location Listing																													
<b>PWS</b> 6' Pre-Wire, 3/8" Diameter, 18 Gauge																														

\* Requires longer lead time.

**Notes**


1. Supplied with lift and shift lay-in lens.
2. Supplied with snap-in lens.
3. Wet Location label not available with regressed lens, sensor options or PWS. Cannot be installed on vertical surfaces.
4. Not intended for post sheetrock installation.
5. Wall wash not available with RLP lens or all sensor options.
6. No longer applicable.
7. Not available with 2' sections, E10WLC or sensors. Only available with NODIM or MIN1 with ZT.
8. Default battery pack is integral, battery pack will be remote on 2' & 3' (RE10WLC) if 5' or 6' unit, integral battery pack is only available with ZT or NLTAIR2. Battery will be remote with RLP, WW or sensors. Only 1 integral battery pack per unit. CP listing must have an integral battery. Remote batteries are not wet location listed, they may be used with a wet location fixture is the battery itself is mounted in a dry location.
9. Not available with ECOD control input.
10. Standard 4' EC section, defaults to end of run. 2ft, 3ft and 5ft powers entire fixture, 6ft powers 3ft EC section.
11. Only available with NODIM option.
12. Sensors not available with WW, NODIM driver, WL, RLP, downlights or 2' or 3' units. Not available with 347 & NLIGHT together. Default location for sensor is the left side of the fixture. For runs, the first fixture will include the sensor.
13. Requires ZT or NLIGHT Control Input.
14. Requires ZT, NLIGHT or NLTAIR2 Control Input.
15. MIN10 not available with 347, sensors, NLIGHT or NLTAIR2, requires ZT.
16. ECOD not available with sensors and requires MIN1 dimming.
17. Must select MIN1 or DARK. Not available with RLP, WW, PDT, ADC or 347, DPL or WL.
18. CP not available with NLTAIR2.
19. DALI is only available with DARK or MIN1. It is not available with sensors or downlights.
20. Lens is not sealed or gasketed.
21. 1" increments will have extended lead time.
22. Not available with RLP regressed lens option.




Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

Maximum order quantity for Design Select lead times is 350 linear feet.

**Technical Drawing**

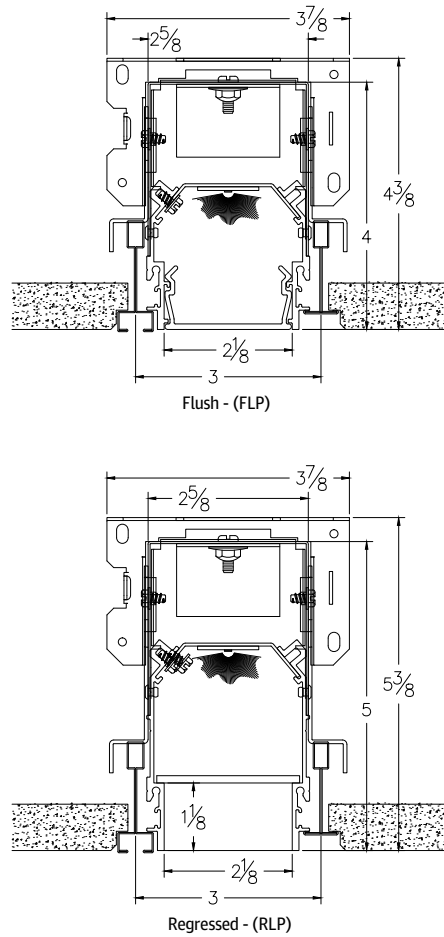


**Ceiling Trim**

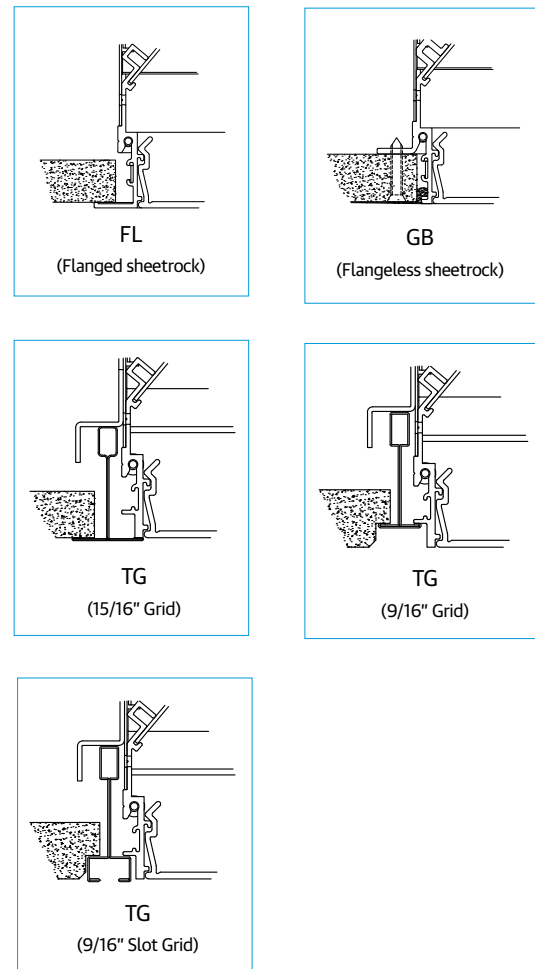


**Emergency Battery**

Internally Mounted (E10WLCP)

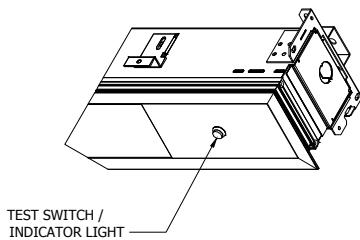

Remote Mounted (RE10WLCP)

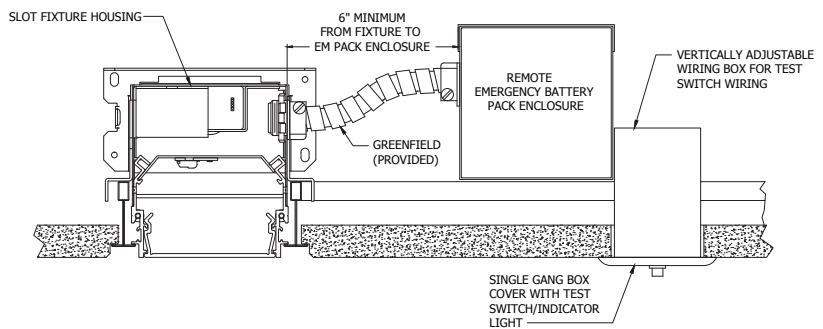


**Notes**

- Delivers 700 lumens per 4FT length. Default location is the right side of fixture and end of run.
- Provided with 4FT of flexible conduit. Maximum of 25FT remote distance if extended. Extension provided by others.
- See ordering tree notes for remote battery pack scenarios.

**nLight Air Wireless**

To Make fixture NLTAIR2 compatible the following components are required:

- 1) rpp20 D
- 2) rPODB 2P DX

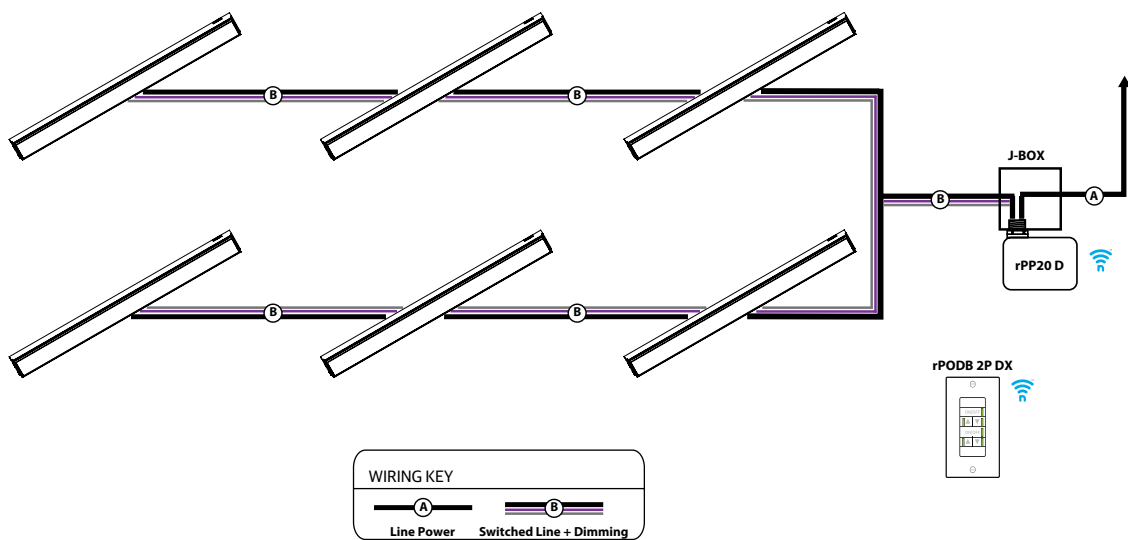


**Continuous Runs**


Slot 2 LED continuous rows can be configured in 1" increments.

**Run Patterns, Corners and Junction**


Slot 2 LED patterns be configured in 1' increments with illuminated 90° inside and outside corners, T junctions, and X junctions with standard 2' corner and junction lengths. For custom angles, corner or junction lengths, consult factory.




90° Corner




T Junction



X Junction



Inside Corner





Outside Corner

**Layout Sketch**


Please draw and configure your linear run below.

**OPTICS**


Slot LED's patent-pending, precision lumen DIRECTIR optics condition and refract light to deliver accurately controlled, striation-free, and uniform white light. All lumen DIRECTIR optics are injection-molded, optical grade, UV-resistant acrylic with selective finishing/polishing treatment.

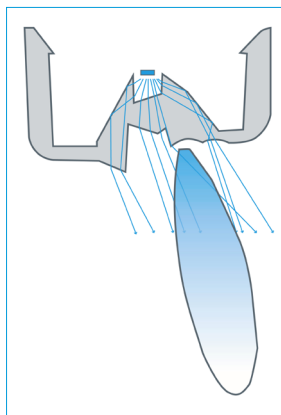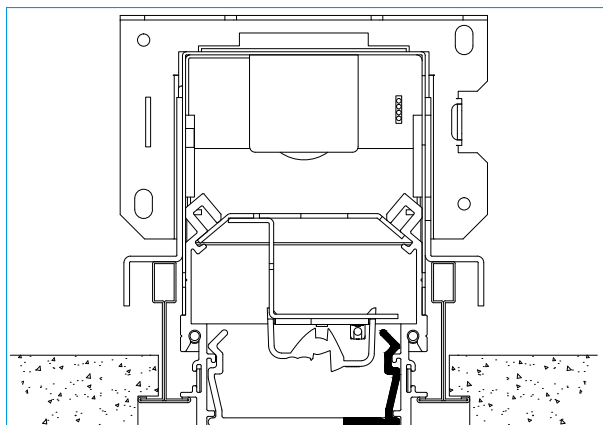

Optional Wall Wash (WW)



**INTEGRATED SENSOR LAYOUT**

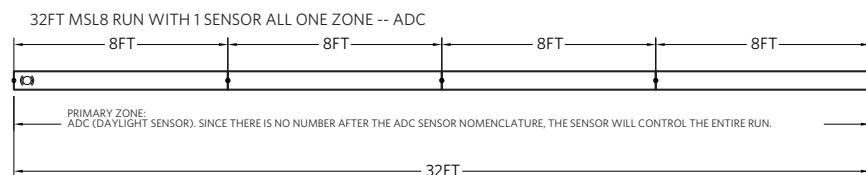

**Notes:**  
● Only one sensor per zone


**OCCUPANCY DETECTION COVERAGE**

At the 7.5 ft (2.9 m) hanging height of a typical pendant mount fixture the sensor provides 10 ft (3.05 m) radial detection of small motion. At a 9 ft (2.74 m) hanging height the radius is 12 ft (3.66 m) for small motion.

Adequate for walking motion detection from mounting heights between 7.5 ft (2.29 m) and 20 ft (6.10 m).

Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor.

Initial detection of walking motion into long coverage segment will occur at distances of 2x the mounting height up to 15 ft (4.57 m) and 1.75x up to 20 ft (6.10 m). Lens assembly rotates 15° to enable adjustment in order to line up long segments.

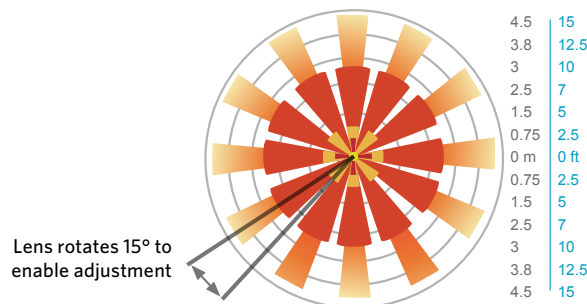

**UGR CHART**

Lumen Package	UGR (70% 50% 20% REFLECTANCE USING A 4H X 8H ROOM SIZE)					
	Crosswise			Endwise		
	FLP	RLP	WW	FLP	RLP	WW
400LMF	22.1	22.2	19.6	20.8	18.2	20.3
600LMF	24	24.1	21.5	22.7	20.1	22.3
800LMF	25	25	22.4	23.7	21.1	23.2
1000LMF	25.7	25.7	23.1	24.4	21.8	23.9

\*UGR varies based on luminaire options and is affected by application dependent parameters. Numbers depicted here are considered "Luminaire-UGR" and/or "Point-UGR" values. To determine a more precise maximum UGR value ("Application-UGR"), a full lighting design layout should be completed with the selected luminaire configuration for each application.

\*\* Click here for more information on UGR FAQ