

FEATURES & SPECIFICATIONS

INTENDED USE — Recessed housing rated IC or Non-IC. For remodel construction only.

Approved for factory assembled wiring only.

Approved for direct burial in insulation.

CONSTRUCTION — Air-tight standard. Tested to meet current energy codes.

Aluminum housing with three remodel clips for installation in existing plaster, sheet rock or mechanical ceiling.

Heavy-gauge galvanized steel raceway arm.

Galvanized steel junction box with four built-in Romex clamps. Five 1/2" knockouts with slots for pryout. Not suitable for pulling wires.

Rated for 90° C.

Ground wire provided.

Removable J-box doors for easy access.

ELECTRICAL — Durable medium base porcelain socket with nickel-plated copper alloy screw shell and contact.

Socket clips to top of housing to prevent paint overspray in socket screw shell.

Socket attaches to reflector to ensure proper and consistent lamp position.

Thermal protection provided against improper lamp usage.

120 volt only.

INSTALLATION — Air-tight housing suitable for air-tight installations. Refer to energy codes for proper installations.

2x8 and 2x6 existing ceiling or T-bar ceiling panel installation.

Clip adjustment on housing (max. 5/8" and min. 1/2") allows for flush mounting with ceiling face.

LISTINGS — UL Listed to US and Canadian safety standards. Damp location listing (See trim selection for wet location listing).

WARRANTY — 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions


Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Catalog Number
Notes
Type

4" Remodel Housing

L3R

INCANDESCENT
IC/Non-IC
Remodel Construction

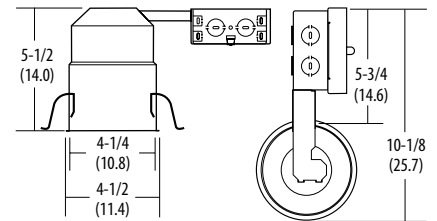

Specifications

Height: 5-1/2 (14.0)
Length: 10-1/8 (25.7)
Width: 5-3/4 (14.6)
Ceiling opening: 4-1/4 (10.8)
Ceiling cutout template: 4.01

All dimensions are inches (centimeters) unless otherwise specified.

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: L3R R6

Series	Options	Packaging
L3R	Shipped installed in fixture PHC Poke-home wire connector	R6 Resale pack of six U Unit

Notes

See trim summary on reverse side for maximum wattages.

L3R 4" Remodel Housing

Description
Catalog number Maximum wattage¹

General/Task

Open Narrow Flange

- 301** White
- 301MW** Matte white
- 301A** Clear diffuse, white plastic flange
- 301AZ** Clear specular anodized
- 301BLZ** Black specular anodized

<i>IC</i>		30 R20 35 PAR20
<i>Non IC</i>		50 PAR20

Baffle Narrow Flange

- 3B1W** White
- 3B1MW** Matte white

<i>IC</i>		50 PAR20 50 R20
-----------	---	--------------------

Baffle Deep Narrow Flange

- 3B2W** White

<i>IC</i>		30 R20 35 PAR20
<i>Non IC</i>		50 R20

Description
Catalog number Maximum wattage¹

Accent/Wallwash

Eyeball Narrow Flange

- 3E1MW** Matte white

<i>IC</i>		50 PAR20 50 R20
-----------	---	--------------------

Notes

- 1 Maximum wattage listed. Lower wattage lamps may be used.
- 2 All trims are damp location listed.

LED Gimbal Module (Damp location)



Example: 4G1MB LED
L3R¹

ORDERING INFORMATION For shortest lead times, configure product using **bolded options**.

4G1		LED			
Series/Finish		Lamps	CCT / CRI / W / Lumens ²		Voltage
<u>Series</u>	<u>Finish</u>	LED	30K 90CRI	3000K / 93CRI / 7.7W / 500L	(blank) 120V
4G1	4" Gimbal module		40K 90CRI	4000K / 94CRI / 8W / 560L	
	MB Matte black ²				
	BN Brush nickel ²				

Notes

- 1 L3R must be ordered on separate line.
- 2 Total system delivered lumens.