



Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

# 4" BASICS SERIES™ LED RETROFIT ADJUSTABLE TRIM

## ADJUSTABLE RETROFIT FOR STANDARD 4" RECESSED HOUSINGS

### 4RLA G2 06LM



### PRODUCT DESCRIPTION

Energy efficient LED adjustable trim module fits into standard 4" IC or non-IC recessed housings • Replaces 50W incandescent lamp, producing over 600 lumens • Adjustable gimbal design allows for up to 35° vertical aiming • Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers • LED retrofit module is designed to provide 50,000 hours of life • 5 year warranty

### PRODUCT SPECIFICATIONS

**LED Retrofit Adjustable Trim** Cast aluminum trim with white gimbal and flange. All-in-one design where LED light engine mounts directly to trim for ease of installation into existing 4" recessed housings with medium base sockets • Up to 35° vertical adjustment • Provided with push-in friction springs.

**LED Light Engine** LEDs mounted directly to aluminum housing designed to provide superior thermal management and ensure long life • 2700K or 3000K LED color temperature • 90 CRI minimum • Accommodates 120 volts AC at 60Hz • Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers • For a list of compatible dimmers, see [JUNORETROBASICS-DIM](#).

**Electrical Connections** Trim features quick connect plug installed as standard for installation into QC4 and QC4R housings with mating connector • Trim ships as standard with a medium base socket adapter whip for installation into 4" incandescent housings with medium base sockets • Product shipping to California does not include medium base socket adapter (L/SKTWHIP).

**Optical System** Trims are offered with choice of 25° narrow flood or 65° wide flood beam patterns • Ships without E26 screw base socket adapter with L/SKTWHIP option • LED source concealed with lensed optic.

**Life** Rated for 50,000 hours at 70% lumen maintenance.

**Labels** ENERGY STAR® Certified • Certified to the high efficacy requirements of California T24 • UL and cUL classified for use with most standard UL listed 4" recessed incandescent housings and Juno QC4 and QC4R; see below for specific compatibility requirements • Damp location.

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

**Note:** Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

### INSTALLATION

The LED retrofit adjustable trim is provided with push-in friction springs as standard.

### COMPATIBLE HOUSINGS

The 4RLA G2 retrofit adjustable trim is compatible with most 4" recessed housings measuring at least 4" high with an inside diameter between 4" and 4-1/2".

**Compatible housings include, but not limited to:**

**Juno housings:** IC1 and TC1 Series

**Juno quick-connect LED housings:** QC4 and QC4R

**VuLite® housings:** V4IC and V4TC Series

**Lithonia® housings:** L3 Series


**Halo® housings:** H99 Series

**Thomas® housings:** PS4 Series

**Capri® housings:** P4 and R4 Series



### DIMENSIONS

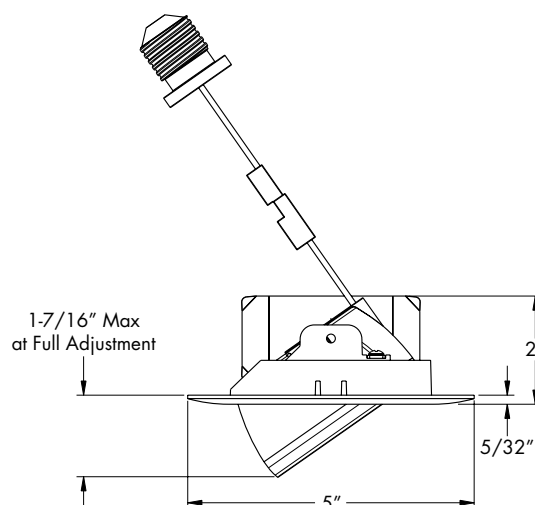

### PERFORMANCE DATA

	27K	30K
Input Voltage	120V	120V
Input Power Typical	10.5W	10.5W
Frequency	60Hz	60Hz
EMI/RFI	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)
Minimum starting temp	-30°C (-22°F)	-30°C (-22°F)
CRI	90 min.	90 min.
CCT	2700K	3000K

### ACCESSORIES

Replacement E26 screw base adapter for installation into incandescent housings.

**LEDRETROWHIP** Unit Pack

**LEDRETROWHIP J10** Job pack 10 pcs

**LEDRETROWHIP J25** Job pack 25 pcs



# 4" BASICS SERIES™ LED RETROFIT ADJUSTABLE TRIM

## ADJUSTABLE RETROFIT FOR STANDARD 4" RECESSED HOUSINGS

### 4RLA G2 06LM

#### ORDERING INFORMATION

Ordering Example: 4RLA G2 06LM 27K 90CRI NFL 120 FRPC WH

Series	Generation	Lumens	Color Temperature	Color Rendering Index
<b>4RLA</b> 4" Juno Basics Retrofit Adjustable	<b>G2</b> Generation 2	<b>06LM</b> 600 Nominal Lumens	<b>27K</b> 2700K <b>30K</b> 3000K	<b>90CRI</b> 90+ CRI

Distribution	Voltage	Driver	Finish	Options
<b>NFL</b> Narrow Flood <b>WFL</b> Wide Flood	<b>120</b> 120V	<b>FRPC</b> Forward/Reverse Phase Cut	<b>WH</b> White	<b>L/SKTWHIP</b> <sup>1</sup> Less Socket Whip (California Only) E26 screw base adapter not included

Notes:

1 Required for shipments to California.

Paris perfectly with Juno housings for a complete downlight solution: Order housings as separate catalog number.

**QC4 Series** - New Construction Quick Connect LED Housing



**QC4R Series** - Remodel Quick Connect LED Housing



**IC1FW LEDT24** - Firewall Fire Rated Quick Connect LED Housing




# 4" BASICS SERIES™ LED RETROFIT ADJUSTABLE TRIM

## ADJUSTABLE RETROFIT FOR STANDARD 4" RECESSED HOUSINGS



### 4RLA G2 06LM

**CBCP** • Centerbeam candlepower  
**FC** • Footcandles at beam center  
(aim point)

In vertical aiming applications, aim point (X) is determined by dividing distance from the wall (D) by the tangent of the desired aim angle (A) [0.5774 for 30°, 1.0 for 45°].



Horizontal Aiming Angles




Vertical Aiming Angles

FIXTURE	Beam Type	Beam Spread°	CBCP	0°				30°				30°				
				MH	FC	L	W	FC	L	W		D	FC	X	L	W
With Wide Flood Optic	WFL	65°	517	3	57	3.8	3.8	37	5.9	4.4		1	65	1.7	*	2.5
				4	32	5.1	5.1	21	7.9	5.9		2	16	3.5	*	5.1
				5	21	6.4	6.4	13	9.8	7.4		3	7	5.2	*	7.6
				6	14	7.6	7.6	9	11.8	8.8		4	4	6.9	*	10.2
				7	11	8.9	8.9	7	13.8	10.3		5	3	8.7	*	12.7
				3	265	1.3	1.3	172	1.8	1.5		1	299	1.7	2.1	0.9
				4	149	1.8	1.8	97	2.4	2.0		2	75	3.5	4.2	1.8
With Narrow Flood Optic	NFL	25°	2389	5	96	2.2	2.2	62	3.0	2.6		3	33	5.2	6.2	2.7
				6	66	2.7	2.7	43	3.6	3.1		4	19	6.9	8.3	3.5
				7	49	3.1	3.1	32	4.2	3.6		5	12	8.7	10.4	4.4

\*Covers full length of wall based on typical mounting heights of 8-12 feet.

#### PHOTOMETRIC REPORT

Test Report#: PT11151101R  
Catalog No: 4RLA G2 06LM 27K 90CRI NFL 120 FRPC WH  
Luminaire Spacing Criteria: 0.42  
Luminaire LPW: 60



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	2389
5	2105
15	864
25	253
35	79
45	26
55	10
65	6
75	2
85	0
90	0

Multiplier: 3K - 1.03

#### AVERAGE INITIAL FOOTCANDLES Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Walls 50%, Floors 20%

Spacing	RCR1	RCR3	RCR5
4'	44	40	36
5'	28	25	23
6'	20	18	16
7'	16	14	13
8'	13	11	10
9'	10	9	8
10'	7	6	6

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	544	N/A	85.7
0-40°	595	N/A	93.8
0-60°	626	N/A	98.7
0-90°	634	N/A	100.0

#### INITIAL FOOTCANDLES (One Unit: 10.5W, 24.3° Beam)


Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4'	149.3	1.7
6'	66.4	2.6
8'	37.3	3.4
10'	23.9	4.3

#### LUMINANCE (Average cd/m²)

Angle in Degrees	Average 0-90°
45°	17578
55°	8505
65°	6215
75°	4531
85°	538

#### PHOTOMETRIC REPORT

Test Report#: PT10151401R  
Catalog No: 4RLA G2 06LM 27K 90CRI WFL 120 FRPC WH  
Luminaire Spacing Criteria: 1.02  
Luminaire LPW: 62



#### CANDLEPOWER DISTRIBUTION (Candelas)

Degrees Vertical	0°
0	517
5	513
15	474
25	384
35	228
45	101
55	50
65	21
75	5
85	0
90	0

Multiplier: 3K - 1.03

#### AVERAGE INITIAL FOOTCANDLES Multiple Units (Square Array, 60'x60' room)

Ceiling 80%, Walls 50%, Floors 20%

Spacing	RCR1	RCR3	RCR5
4'	44	37	31
5'	28	24	20
6'	20	16	14
7'	16	13	11
8'	13	11	9
9'	10	8	7
10'	7	6	5

#### ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixture
0-30°	356	N/A	54.7
0-40°	498	N/A	76.6
0-60°	623	N/A	95.8
0-90°	650	N/A	100.0

#### INITIAL FOOTCANDLES (One Unit: 10.5W, 66.7° Beam)

Distance to Illuminated Plane (Feet)	Footcandles Beam Center	Beam Diameter
4'	32.3	5.3
6'	14.4	7.9
8'	8.1	10.5
10'	5.2	13.2

#### LUMINANCE (Average cd/m²)

Angle in Degrees	Average 0-90°
45°	99567
55°	60770
65°	34529
75°	14162
85°	0