



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

TRAC-MASTER®

Recessed Trac System

TRAC SECTIONS, CONNECTORS & ACCESSORIES

TREC



PRODUCT DESCRIPTION

Flanged, single-circuit trac sections for recessing into plaster board or suspended grid ceiling. For straight runs only. Accepts all Trac-Master and Trac-Lites trac fixtures.

PRODUCT SPECIFICATIONS

Construction Extruded aluminum flanged channel • One-piece thermoplastic insulator • Injection molded polycarbonate dead-end with set screw • Standard lengths may be cut-to-length by installer.

Electrical Two 12 gauge solid copper conductors • Rated 20 amps at 120 volts • Aluminum channel used as system ground • One-piece insulator insures consistent conductor spacing for reliable electrical contact • Insulating bushings supplied at mounting hole locations to prevent shorts to ground.

Government Procurement

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.


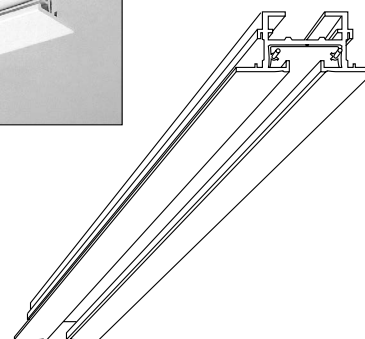

Labels UL listed, CSA certified.

PRODUCT INSTALLATION

Debossed polarity line provides visual cue to proper trac, trac connector and fixture alignment • Supplied with toggle bolts • Insulator stays same length as extrusion to simplify field-cutting of trac • Connectors and feeds simply push into trac sections.

WARRANTY - 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

DIMENSIONS





Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

ORDERING INFORMATION




Example: TREC 8FT WH

Series	Length	Finish
TREC Trac-Master Recessed Track Section	4FT 4-foot track section; actual length 43-7/8"	WH White
	8FT 8-foot track section; actual length 91-7/8"	

Trac Connectors

T121 WH	T123 WH
End Feed Connector With wiring box for electrifying trac. Requires above-ceiling access.	Mini Straight Connector Mechanically and electrically joins two trac sections end to end.
	

Accessories

T31N BL, SL, WH	T32 BL, WH	T33 BL, WH
Pendant Adapter Adapts corded, swag or chain-hung fixture to trac. Includes loop hook for chain installation and strain relief for direct cord suspension. Chain installation accepts cord diameters up to 0.270" and supports up to 15 lbs. Strain relief installation accepts cord diameters of 0.170" to 0.255", type SVT 18/3, and supports up to 5 lbs. May also be specified with GTYPE, HTYPE or LTYPE Alternate Mounting Adapters (i.e. T31N HTYPE WH). SA max. UL Listed. Not available in HTYPE BL.	Plant or Utility Hook Supports up to 25 lbs. Not UL Listed.	Outlet Adapter Provides electrical receptacle. Not UL Listed.
		

Note: GTYPE, HTYPE and LTYPE available in BL or WH finishes only.

