

FEATURES & SPECIFICATIONS

INTENDED USE — Wet location, recessed LED troffer for general illumination of demanding environments subject to dust and moisture. Typical applications include shower areas, bathrooms, recreational facilities and canopies.

Certain airborne contaminants may adversely affect the functioning of LEDs and other electronic components, depending on various factors such as concentrations of the contaminants, ventilation, and temperature at the end-user location. [Click here for a list of substances that may not be suitable for interaction with LEDs and other electronic components.](#)

CONSTRUCTION — Housing is made from 20-gauge cold rolled steel. Door frame is 16-gauge painted aluminum and lens is diffused acrylic. Solid silicone gasketing design. Durable IK10 rated luminaire.

Finish: All CRS (cold rolled steel) and aluminum parts are finished with electrostatically deposited, thermally set, polyester powder paint after fabrication. Door frame finish available in black, white and silver colors. Enclosure finish available in white, Antimicrobial white and super-durable white.

OPTICS — Long-life LEDs, coupled with high-efficiency drivers, provide extended service life. Lumen maintenance of L80/60,000 hours, L70>100,000 hours.

ELECTRICAL — Thermally protected, resetting, Class P, UL listed, CSA certified driver is standard.

LED driver delivers dimming from a 0-10V control signal. Dims to 1% standard.

Luminaire Surge Protection Level: Designed to withstand up to 6kV/3kA per ANSI C82.77-5-2015.

Optional integrated nLight controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Connection to nLight is simple. nLight AIR is commissioned easily through an intuitive mobile app.

SENSOR — **Integrated sensor (individual control):** Sensor Switch SBG family offers low- or high-mount options and integrated occupancy sensors with optional dimming that can allow the luminaire to power off when the space is unoccupied or enough ambient light is entering the space. See page 4 for more details on the integrated sensor.

Integrated Bluetooth Sensor (individual control): Sensor Switch SBG family offers low- or high-mount options and integrated occupancy sensors with dimming photocells that allow for changing settings using Bluetooth® communication (up to 100 ft. range) using the SensorSwitch VLP mobile app.

Integrated Smart Sensor (nLight Air Wireless Platform): The SBG sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is available with an integrated photocell using Digital Passive Infrared technology for motion detection, and optional dimming.

INSTALLATION — Lay-in grid or in-ceiling sheet rock installation using swing-arms with range from 1" to 2" grid height. See drawings for other critical dimensions. Swing-arms are not intended to secure fixture without additional support. Line voltage supply wiring entrance opening is 7/8".

LISTINGS — CSA certified to meet U.S. and Canadian standards (UL1598 and UL8750) or NOM Certified. IC rated. Wet location listed. IP65 & IP66 rated from room side (overlap door only). FPA option: NSF Splash Zone 2 (overlap door only & DWAM finish only). For ambient temperature ratings, see chart on page 3.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed.

Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

| |
|----------------|
| Catalog Number |
| Notes |
| Type |

LED Recessed Wet Location Troffer

WRTL



Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks marked by a **shaded background***

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

WRTL LED Recessed Wet Location Troffer



A+ Capable options indicated by this color background.

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 2WRTL G L48 18000LM IAW AFL MVOLT GZ1 40K 80CRI WH

| Series | | Trim type | | Length | | Nominal Lumens ‡ | | | | | |
|--------|--|-----------|--------------------------------|--------|-------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| WRTL | Recessed wet location troffer, 1' wide ‡ | G | Grid (9/16" - 1 1/2" W x 2" H) | L24 | 24" ‡ | <u>1x4:</u> | | <u>2x2:</u> | | <u>2x4:</u> | |
| | | F | Flange | L48 | 48" | 3000LM | 3,000 lumens | 3000LM | 3,000 lumens | 3000LM | 3,000 lumens |
| 2WRTL | Recessed wet location troffer, 2' wide | | | | | 5000LM | 5,000 lumens | 5000LM | 5,000 lumens | 5000LM | 5,000 lumens |
| | | | | | | 7000LM | 7,000 lumens | 7000LM | 7,000 lumens | 7000LM | 7,000 lumens |
| | | | | | | 10000LM | 10,000 lumens ‡ | 10000LM | 10,000 lumens ‡ | 10000LM | 10,000 lumens ‡ |
| | | | | | | 12000LM | 12,000 lumens ‡ | 12000LM | 12,000 lumens ‡ | 12000LM | 12,000 lumens ‡ |
| | | | | | | | | 15000LM | 15,000 lumens ‡ | 15000LM | 15,000 lumens ‡ |
| | | | | | | | 18000LM | 18,000 lumens ‡ | 18000LM | 18,000 lumens ‡ | |
| | | | | | | | | | 24000LM | 24,000 lumens ‡ | |
| | | | | | | | | | 30000LM | 30,000 lumens ‡ | |

| Door frame | | Diffuser type | | Distribution | | Voltage | | Driver | | Color temperature | | Color rendering index | |
|------------|------------------------------|---------------|--------------------------------|--------------|-----------------------|---------|----------|--------|---|-------------------|--------|-----------------------|--------|
| OAW | Overlapping aluminum, white | AFL | Acrylic, frosted (.125" Thick) | MD | Medium distribution | MVOLT | 120-277V | GZ1 | 0-10V dimming ‡ | 30K | 3000 K | 80CRI | 80 CRI |
| OAN | Overlapping aluminum, silver | | | ND | Narrow distribution ‡ | 120 | 120V | EZ1 | eidoLED 0-10V ECOdrive. Linear dimming to 1% min. | 35K | 3500 K | 90CRI | 90 CRI |
| OAM | Overlapping aluminum, black | | | | | 208 | 208V | 40K | | 4000 K | | | |
| IAW | Inset aluminum, white | | | | | 240 | 240V | 50K | | 5000 K | | | |
| IAN | Inset aluminum, silver | | | | | 277 | 277V | | | | | | |
| IAM | Inset aluminum, black | | | | | 347 | 347V ‡ | | | | | | |

| Options | | | | | Finish | |
|----------|---|------------------------|--|----------------|--------------------|---|
| ETS | Generator Transfer Device ‡ | Individual Controls: ‡ | | | nLight Wireless: ‡ | |
| IE10WLCP | EM Self-diagnostics battery pack, 10W, Constant Power Certified in CA Title 20 MAEDBS ‡ | SBG6 | 360° High Mount sensor, (15-30' mounting heights), on/off occupancy (LINK) | | NLTAIR2 APIRM | Embedded wireless controls from nLight; passive Infrared Occ sensor with autodimming photocell for medium (15-30') mounting height applications (LINK) |
| | | SBG10 | 360° Low Mount Sensor, (8-15' mounting heights), on/off occupancy (LINK) | | NLTAIREM2 APIRM | Embedded wireless controls from nLight with UL924 listed emergency operation; passive Infrared Occ sensor with autodimming photocell for medium (15-30') mounting height applications (LINK) |
| FPA | Food processing area ‡ | SBG6 P | 360° High Mount Sensor, (15-30' mounting heights), on/off photocell (LINK) | | NLTAIRER2 APIRM | Embedded wireless controls from nLight with UL924 listed emergency operation via power sense leads; Passive Infrared Occ sensor with auto-dimming photocell for medium (15-30') mounting height applications (LINK) |
| | | SBG10 P | 360° Low Mount Sensor, (8-15' mounting heights), on/off photocell (LINK) | | | |
| SF | Single fusing | SBG6 D 3V | 360° High Mount sensor, (15-30' mounting heights), high/low occupancy dimming (LINK) | | NLTAIR2 APIR | Embedded wireless controls from nLight; passive Infrared occ sensor with autodimming photocell for low mounting height applications (LINK) |
| DF | Double fusing | SBG10 D 3V | 360° Low Mount sensor, (8-15' mounting heights), high/low occupancy dimming (LINK) | | | |
| RRL_ | RELOC®-Ready luminaire ‡ | Bluetooth Sensors: | | NLTAIREM2 APIR | | |
| SPD | Surge protection, 10kV | SBG6 OCC BTP | 360° High Mount Sensor, (15-45' mounting heights), on/off occupancy, utilizes smart hub for Bluetooth® programmability (LINK) | | NLTAIRER2 APIR | Embedded wireless controls from nLight with UL924 listed emergency operation via power sense leads; passive Infrared Occ sensor with auto dimming photocell for low mounting height applications (LINK) |
| | | SBG10 OCC BTP | 360° Low Mount Sensor, (7-15' mounting heights), on/off occupancy, utilizes smart hub for Bluetooth® programmability (LINK) | | | |
| SLD | Step level dimming, 100% to 50% | SBG6 HL BTP | 360° High Mount Sensor, (15-45' mounting heights), high/low/ (off) occupancy dimming, utilizes smart hub for Bluetooth® programmability (LINK) | | NLTAIR2 APIRH | Embedded wireless controls from nLight with UL924 listed emergency operation; passive infrared occ sensor with autodimming photocell for high mounting height applications (LINK) |
| | | SBG10 HL BTP | 360° Low Mount Sensor, (7-15' mounting heights), high/low/ (off) occupancy dimming, utilizes smart hub for Bluetooth® programmability (LINK) | | | |
| | | SBG6 ADC BTP | 360° High Mount Sensor, (15-45' mounting heights), on/off occupancy with auto dimming photocell, utilizes smart hub for Bluetooth® programmability (LINK) | | NLTAIRER2 APIRH | Embedded wireless controls from nLight with UL924 listed emergency operation via power sense leads; passive infrared occ sensor with auto-dimming photocell for high mounting height applications (LINK) |
| | | SBG10 ADC BTP | 360° Low Mount Sensor, (7-15' mounting heights), on/off occupancy with auto dimming photocell, utilizes smart hub for Bluetooth® programmability (LINK) | | | |
| | | SBG6 ANL BTP | 360° High Mount Sensor, (15-45' mounting heights), high/low/ (off) occupancy dimming with auto dimming photocell, utilizes smart hub for Bluetooth® programmability (LINK) | | NLTAIR2 | Embedded wireless controls from nLight (LINK) |
| | | SBG10 ANL BTP | 360° Low Mount Sensor, (7-15' mounting heights), high/low/ (off) occupancy dimming with auto dimming photocell, utilizes smart hub for Bluetooth® programmability (LINK) | | NLTAIREM2 | Embedded wireless controls from nLight with UL924 listed emergency operation (LINK) |
| | | | | | NLTAIRER2 | Embedded wireless controls from nLight with UL924 listed emergency operation via power sense leads (LINK) |

WRTL LED Recessed Wet Location Troffer

CONFIGURATIONS

| Lumens | 1' X 4' | 2' X 2' | 2' X 4' |
|----------|---------|---------|---------|
| 3,000LM | X | X | X |
| 5,000LM | X | X | X |
| 7,000LM | X | X | X |
| 10,000LM | X | X | X |
| 12,000LM | X | X | |
| 15,000LM | | X | X |
| 18,000LM | | X | X |
| 24,000LM | | | X |
| 30,000LM | | | X |

| | |
|---|--|
| Accessories: Ships separate from fixture. | |
| XRTL XLF FLANGE KIT | Field installable extra-large flange kit |

Option Value Ordering Restrictions

| Option Value | Restriction |
|--|--|
| 1x4 10000LM, 12000LM | Non-IC rated. Must specify voltage. |
| 2x2 10000LM | Not available with SLDM option. |
| 2x2 12000LM | Not available with SLDM option. |
| 2X2 15000LM, 18000LM | Not available with SLDM or IE10WLCP options. |
| 2X4 10000LM, 12000LM, 15000LM, 18000LM, 24000LM, 30000LM | Not available with SLDM option. |
| 347V | Not available with EZ1, ETS, IE10WLCP, or SLDM options. |
| BGTD | Not available with MVOLT, 208v, 240v, 347v, OR IE10WLCP. Only available with 120v or 277v. For use in ambient temperatures ranging from -4°F (-20°C) to 77°F (25°C). |
| IE10WLCP | Must specify voltage. Not available with MVOLT, 347v, or BGTD. Not available with 1x4 7000LM. For use in ambient temperatures from 0°C (32°F) to 25°C (77°F). See spec sheet PS1055LCP (10W Linear Constant Power) for more information. Meets CA Title 20 compliance. |
| ETS | Not available with 347V. |
| EZ1 | Not available with 347V. |
| Finish | Only DWAM and WH paint finish are NSF Certified for non-food contact. |
| FPA | Provides NSF labeling for Splash Zone 2 (non-food contact). Only available with OAW overlapping doorframe and WH or DWAM finish. |
| IE10WLCP | Not available on 2WRTL L24 15000LM or 18000LM or 347V. |
| Individual Controls | Cannot be used with other control options-MSE or nLight. Not available with BGTD. Not available with GZ1. |
| L24 | Not available with 2WRTL |
| ND | Not available on WRTL L48 nLight Wireless ER option sensors are not available with ETS. ER and EM options are not available with IE10WLCP. |
| nLight | Cannot be used with other control options-MSE or nLight. Not available with BGTD. Not available with GZ1. |
| Nominal Lumens | Not all lumen packages are available with every length/width combination. See configuration chart for availability. |
| RRL_ | See ordering information on page 7 |
| SLDM | Note available with 347V, IE10WLCP or ETS option. Not available with WRTL L48 10000LM or 12000LM, 2WRTL L24 10000LM, 12000LM, 15000LM, or 18000LM, or 2WRTL L48 10000LM, 12000LM, 15000LM, 18000LM, 24000LM, or 30000LM. |
| WRTL | Only available with L48 length. |
| XLF | For use with inset doors only. |

| Maximum Ambient Temperatures (Celsius) | | | | | |
|--|---------------|-----------|-------------------------------------|----------|-----|
| Fixture size | Lumen package | IC rating | Standard fixture including controls | IE10WLCP | ETS |
| 1 X4 | 3000LM | IC | 40 | 30 | 30 |
| | 5000LM | IC | 40 | 30 | 30 |
| | 7000LM | IC | 40 | 30 | 30 |
| | 10000LM | NON-IC | 40 | 25 | 35 |
| | 12000LM | NON-IC | 40 | 25 | 35 |
| 2X2 | 3000LM | IC | 40 | 30 | 30 |
| | 5000LM | IC | 40 | 30 | 30 |
| | 7000LM | IC | 40 | 30 | 30 |
| | 10000LM | NON-IC | 40 | 25 | 35 |
| | 12000LM | NON-IC | 40 | 25 | 35 |
| | 15000LM | NON-IC | 40 | N/A | 25 |
| 2X4 | 18000LM | NON-IC | 35 | N/A | N/A |
| | 3000LM | IC | 40 | 30 | 30 |
| | 5000LM | IC | 40 | 30 | 30 |
| | 7000LM | IC | 40 | 30 | 30 |
| | 10000LM | IC | 40 | 30 | 30 |
| | 12000LM | IC | 40 | 30 | 30 |
| | 15000LM | NON-IC | 40 | 25 | 35 |
| | 18000LM | NON-IC | 40 | 25 | 35 |
| | 24000LM | NON-IC | 40 | 25 | 35 |
| | 30000LM | NON-IC | 35 | N/A | N/A |




WRTL LED Recessed Wet Location Troffer

| | | | Out of the box settings | | | | | Fixture Image with Sensor | Notes |
|--------------|---------------------|-----------------------|---------------------------|-----------------------|--------------------|----------------------|-----------------------|---------------------------|--|
| Control Type | Sensor Nomenclature | Sensor Used | Unoccupied Time Until Dim | Dim to Off Time Delay | Occupied Dim Level | Unoccupied Dim Level | Daylighting Set Point | | |
| Standalone | SBG10 | SBG 10 EZ WH 0V | 5M | n/a | 100% | 0V | n/a | | |
| | SBG10 D | SBG 10 EZ WH 3V | 5M | n/a | 100% | 30% | n/a | | |
| | SBG10 P | SBG 10 EZ P WH 0V 10M | 10M | n/a | 100% | 0V | 5FC | | |
| | SBG6 | SBG 6 EZ WH 0V | 5M | n/a | 100% | 0V | n/a | | |
| | SBG6 D | SBG 6 EZ WH 3V | 5M | n/a | 100% | 30% | n/a | | |
| | SBG6 P | SBG 6 EZ P WH 0V 10M | 10M | n/a | 100% | 0V | 5FC | | |
| Bluetooth | SBG10 OCC BTP | SBG10 BTP OCC | 10M | n/a | 10V | n/a | n/a | | Not a dimming sensor, so no dim to off, it just goes off |
| | SBG10 HL BTP | SBG10 BTP HL | 10M | 2.5M | 10V | 10% | n/a | | |
| | SBG10 ADC BTP | SBG10 BTP ADC | 10M | 2.5M | 10V | 10% | 50FC | | |
| | SBG10 ANL BTP | SBG10 BTP ANL | 10M | n/a | 10V | 10% | 50FC | | Never off due to occupancy |
| | SBG6 OCC BTP | SBG6 BTP OCC | 10M | n/a | 10V | n/a | n/a | | Not a dimming sensor, so no dim to off, it just goes off |
| | SBG6 HL BTP | SBG6 BTP HL | 10M | 2.5M | 10V | 10% | n/a | | |
| | SBG6 ADC BTP | SBG6 BTP ADC | 10M | 2.5M | 10V | 10% | 50FC | | |
| | SBG6 ANL BTP | SBG6 BTP ANL | 10M | n/a | 10V | 10% | 50FC | | Never off due to occupancy |
| NLTAIR2 | APIR | RSBG10 | 7.5M | 2.5M | 100% | 10% | 50FC | | |
| NLTAIREM2 | NLTAIR2 APIRM | RSBG6 | | | | | | | |
| NLTAIRER2 | APIRH | RSBG40 | | | | | | | |
| NLTAIR2 | NLTAIR2KO | RIO | n/a | n/a | 80% | n/a | n/a | | Not a sensor |


MOUNTING DATA

Rough-in

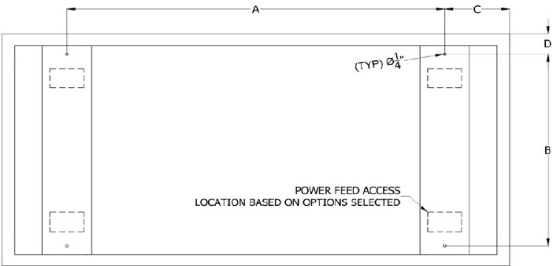

| LUMINAIRE | DIMENSIONS | | | |
|-----------|------------|---------|--------|---------|
| | A | B | C | D |
| 2X2 | 12-3/16" | 20-3/8" | 6-1/4" | 2-3/16" |
| 2X4 | 38" | 20-1/2" | 6-1/4" | 2-3/16" |
| 1X4 | 38" | 8-3/8" | 6-3/4" | 2-3/16" |


Weight: (may vary with options or accessories)
1x4: 36 lbs (16.3kg)
2x2: 36 lbs (16.3kg)
2x4: 53 lbs (24.0kg)

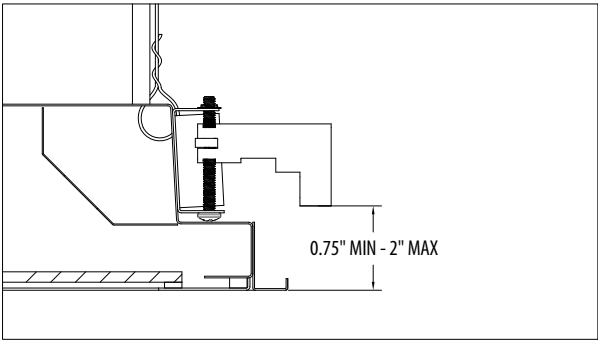




Swing-Arm Reach: 1 3/4"
Swing-arm adjustable range: .75" - 2"

DIMENSIONS


All dimensions are in inches (centimeters) unless otherwise indicated.
Dimensions may vary with options or accessories.

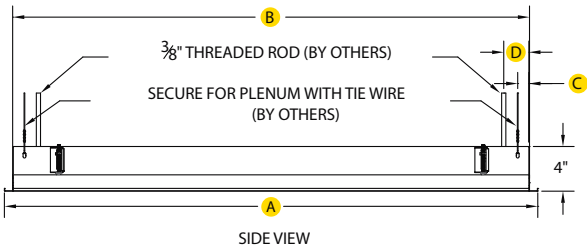




| Series | Length | (A) Flange Length | (B) Housing Length | (C) Tie Wire | (D) Threaded Rod |
|--------|--------|-------------------|--------------------|--------------|------------------|
| 2WRTL | L48 | 47-3/4" | 46-1/4" | 1" | 2-1/4" |
| 2WRTL | L24 | 23-3/4" | 22-1/4" | 1" | 2-1/4" |
| WRTL | L48 | 47-3/4" | 46-1/4" | 3/4" | 1-1/2" |




GRID MOUNTING INSET




FLANGE MOUNTING INSET

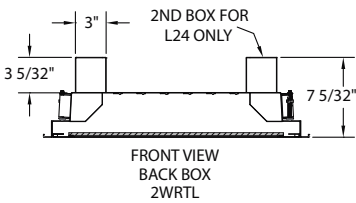


GRID MOUNTING OVERLAP




FLANGE MOUNTING OVERLAP




1X4 with Sensor, Inset Door Frame




2X2 with Sensor, Inset Door Frame

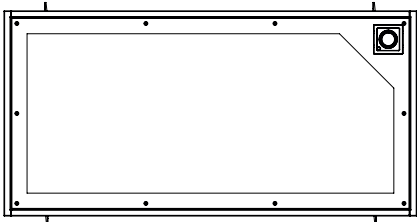

2X4 with Sensor, Inset Door Frame

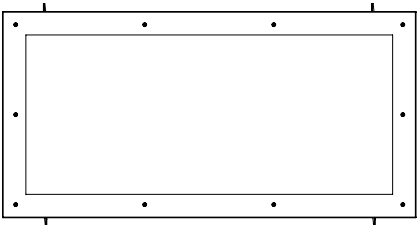

2X4 Overlap Door



2X4 with Sensor, Inset Door, Surface Mount Kit

PHOTOMETRICS

See www.Acuitybrands.com
Photometry files contain UGR rating charts.

OPERATIONAL DATA

| 2WRTL 2 X 2 | | | | | CCT | 3000K | | 3500K | | 4000K | | 5000K | |
|-------------|----------------|---------------|---------|---------|--------------|----------------|-------|--------|-------|-------|-------|-------|-------|
| | | | | | CRI | 80CRI | 90CRI | 80CRI | 90CRI | 80CRI | 90CRI | 80CRI | 90CRI |
| Series | Fixture length | Lumen package | Voltage | Wattage | Distribution | Nominal Lumens | | | | | | | |
| 2WRTL | L24 | 3000LM | 347 | 26 | ND | 2906 | 2543 | 2946 | 2603 | 3027 | 2644 | 3088 | 2745 |
| | | | MVOLT | 26 | | | | | | | | | |
| | | | 347 | 26 | MD | 2908 | 2545 | 2949 | 2605 | 3029 | 2646 | 3090 | 2747 |
| | | | MVOLT | 26 | | | | | | | | | |
| | | 5000LM | 347 | 43 | ND | 4874 | 4265 | 4942 | 4366 | 5077 | 4434 | 5178 | 4603 |
| | | | MVOLT | 41 | | | | | | | | | |
| | | | 347 | 43 | MD | 4877 | 4268 | 4945 | 4369 | 5081 | 4437 | 5182 | 4606 |
| | | | MVOLT | 41 | | | | | | | | | |
| | | 7000LM | 347 | 61 | ND | 6750 | 5906 | 6844 | 6047 | 7031 | 6141 | 7172 | 6375 |
| | | | MVOLT | 57 | | | | | | | | | |
| | | | 347 | 61 | MD | 6755 | 5911 | 6849 | 6051 | 7037 | 6145 | 7177 | 6380 |
| | | | MVOLT | 57 | | | | | | | | | |
| | | 10000LM | 347 | 91 | ND | 9635 | 8430 | 9768 | 8631 | 10036 | 8765 | 10237 | 9099 |
| | | | MVOLT | 84 | | | | | | | | | |
| | | | 347 | 91 | MD | 9642 | 8436 | 9776 | 8637 | 10043 | 8771 | 10244 | 9106 |
| | | | MVOLT | 84 | | | | | | | | | |
| | | 12000LM | 347 | 108 | ND | 11598 | 10148 | 11759 | 10390 | 12081 | 10551 | 12323 | 10954 |
| | | | MVOLT | 102 | | | | | | | | | |
| | | | 347 | 108 | MD | 11607 | 10156 | 141768 | 10398 | 12090 | 10559 | 12232 | 10962 |
| | | | MVOLT | 102 | | | | | | | | | |
| | | 15000LM | 347 | 136 | ND | 14515 | 12701 | 14717 | 13003 | 15120 | 13205 | 15422 | 13709 |
| | | | MVOLT | 133 | | | | | | | | | |
| | | | 347 | 136 | MD | 14526 | 12710 | 14728 | 13013 | 15131 | 13215 | 15434 | 13719 |
| | | | MVOLT | 133 | | | | | | | | | |
| | | 18000LM | 347 | 145 | ND | 15998 | 13998 | 16220 | 14332 | 16665 | 14554 | 16998 | 15109 |
| | | | MVOLT | 142 | | | | | | | | | |
| | | | 347 | 145 | MD | 16010 | 14009 | 16232 | 14342 | 16677 | 14565 | 17011 | 15121 |
| | | | MVOLT | 142 | | | | | | | | | |

| 2WRTL 2 X 4 | | | | | CCT | 3000K | | 3500K | | 4000K | | 5000K | |
|-------------|----------------|---------------|---------|---------|--------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| | | | | | CRI | 80CRI | 90CRI | 80CRI | 90CRI | 80CRI | 90CRI | 80CRI | 90CRI |
| Series | Fixture length | Lumen package | Voltage | Wattage | Distribution | Nominal Lumens | | | | | | | |
| 2WRTL | L48 | 3000LM | 347 | 27 | ND | 3050 | 2668 | 3092 | 2732 | 3177 | 2774 | 3240 | 2880 |
| | | | MVOLT | 22 | | | | | | | | | |
| | | | 347 | 27 | MD | 3004 | 2628 | 3046 | 2691 | 3129 | 2733 | 3192 | 2837 |
| | | | MVOLT | 22 | | | | | | | | | |
| | | 5000LM | 347 | 37 | ND | 4905 | 4292 | 4974 | 4394 | 5110 | 4463 | 5212 | 4633 |
| | | | MVOLT | 36 | | | | | | | | | |
| | | | 347 | 37 | MD | 4832 | 4228 | 4899 | 4328 | 5033 | 4395 | 5134 | 4563 |
| | | | MVOLT | 36 | | | | | | | | | |
| | | 7000LM | 347 | 53 | ND | 6842 | 5987 | 6938 | 6130 | 7128 | 6225 | 7270 | 6462 |
| | | | MVOLT | 52 | | | | | | | | | |
| | | | 347 | 53 | MD | 6740 | 5897 | 6833 | 6037 | 7020 | 6131 | 7161 | 6365 |
| | | | MVOLT | 52 | | | | | | | | | |
| | | 10000LM | 347 | 81 | ND | 9835 | 8606 | 9972 | 8811 | 10245 | 8947 | 10450 | 9289 |
| | | | MVOLT | 76 | | | | | | | | | |
| | | | 347 | 81 | MD | 9687 | 8476 | 9822 | 8678 | 10091 | 8813 | 10293 | 9149 |
| | | | MVOLT | 76 | | | | | | | | | |
| | | 12000LM | 347 | 98 | ND | 11798 | 10323 | 11962 | 10569 | 12289 | 10433 | 12535 | 11142 |
| | | | MVOLT | 95 | | | | | | | | | |
| | | | 347 | 98 | MD | 11620 | 10168 | 11782 | 10410 | 12104 | 10571 | 12347 | 10975 |
| | | | MVOLT | 95 | | | | | | | | | |
| | | 15000LM | 347 | 114 | ND | 14696 | 12859 | 14900 | 13165 | 15308 | 13369 | 15614 | 13879 |
| | | | MVOLT | 111 | | | | | | | | | |
| | | | 347 | 114 | MD | 14475 | 12665 | 14676 | 12967 | 15078 | 13168 | 15379 | 13670 |
| | | | MVOLT | 111 | | | | | | | | | |
| | | 18000LM | 347 | 141 | ND | 17626 | 15423 | 17871 | 15790 | 18361 | 16035 | 18728 | 16647 |
| | | | MVOLT | 135 | | | | | | | | | |
| | | | 347 | 141 | MD | 17361 | 15191 | 17602 | 15553 | 18084 | 15794 | 18446 | 16397 |
| | | | MVOLT | 135 | | | | | | | | | |
| | | 24000LM | 347 | 189 | ND | 23920 | 20930 | 24252 | 21428 | 24916 | 21760 | 25415 | 22591 |
| | | | MVOLT | 182 | | | | | | | | | |
| | | | 347 | 189 | MD | 23560 | 10615 | 23887 | 21106 | 24541 | 21433 | 25032 | 22251 |
| | | | MVOLT | 182 | | | | | | | | | |
| | | 30000LM | 347 | 222 | ND | 29699 | 25986 | 30111 | 26605 | 30936 | 27018 | 31555 | 28049 |
| | | | MVOLT | 221 | | | | | | | | | |
| | | | 347 | 222 | MD | 29252 | 25595 | 29658 | 26205 | 30471 | 26611 | 31080 | 27627 |
| | | | MVOLT | 221 | | | | | | | | | |

OPERATIONAL DATA

| WRTL 1 X 4 | | | | | CCT | 3000K | | 3500K | | 4000K | | 5000K | |
|------------|----------------|---------------|---------|---------|--------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| | | | | | CRI | 80CRI | 90CRI | 80CRI | 90CRI | 80CRI | 90CRI | 80CRI | 90CRI |
| Series | Fixture length | Lumen package | Voltage | Wattage | Distribution | Nominal Lumens | | | | | | | |
| WRTL | L48 | 3000LM | 347 | 24 | ND | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | | | MVOLT | 24 | | | | | | | | | |
| | | | 347 | 24 | MD | 2928 | 2562 | 2969 | 2623 | 3050 | 2664 | 3111 | 2765 |
| | | | MVOLT | 24 | | | | | | | | | |
| | | 5000LM | 347 | 40 | ND | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | | | MVOLT | 41 | | | | | | | | | |
| | | | 347 | 40 | MD | 4892 | 4280 | 4960 | 4382 | 5096 | 4450 | 5198 | 4620 |
| | | | MVOLT | 41 | | | | | | | | | |
| | | 7000LM | 347 | 55 | ND | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | | | MVOLT | 59 | | | | | | | | | |
| | | | 347 | 55 | MD | 6769 | 5923 | 6863 | 6064 | 7052 | 6158 | 7193 | 6393 |
| | | | MVOLT | 59 | | | | | | | | | |
| | | 10000LM | 347 | 84 | ND | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | | | MVOLT | 81 | | | | | | | | | |
| | | | 347 | 84 | MD | 9694 | 8483 | 9829 | 8685 | 10098 | 8819 | 10300 | 9156 |
| | | | MVOLT | 81 | | | | | | | | | |
| | | 12000LM | 347 | 86 | ND | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | | | MVOLT | 96 | | | | | | | | | |
| | | | 347 | 86 | MD | 11825 | 10347 | 11990 | 10594 | 12318 | 10758 | 12565 | 11168 |
| | | | MVOLT | 96 | | | | | | | | | |

RRL - RELOC®-Ready Luminaire

- RRL connectors to be used with the OnePass system.
- Load side of connector factory installed to luminaire.
- 4-pole mating connector with push-in terminations allows for simple installation.
- Touch-safe design on both halves meets UL/CSA requirement.
- Wiping contact design allows safe disconnect under load.



ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: RRLA

| Series | Wiring instructions |
|----------------------------|---|
| RRL RELOC®-ready luminaire | A Hot conductor wired to position #1 (phase A); non-dimming B Hot conductor wired to position #2 (phase B); non-dimming AE Hot conductor wired to position #1 (phase A), hot conductor #2 wired to position #2 (phase B); non-dimming ¹ C12S Hot conductor in position #1 (phase A), low voltage conductor #1 in position #2, low voltage conductor #2 in position #3; dimming ² |

Compatible RELOC® Cables for Industrial Luminaires (ordered and shipped separately)
(click to view RELOC product page for more information)



- Notes
- 1 AE commercial fixtures should disconnect the TSPL before unplugging the RRL so it does not go into discharge mode. Requires fixture to have battery option.
 - 2 C12S option is used with the OnePass for 0-10V/DALI applications. Not for use with dimming sensors.