

Quick Recommendation Guide

Typical Applications

Private Offices		(Typical Energy Savings: 30% - 50%) [†]
Up to 15'x15'		
Without Obstructions	WSX ** / WSX D**	Sensor must have visibility to desktop activity
With Obstructions	WSX PDT VLP ** / WSX PDT D VLP **	Small rooms without direct line of sight (also required if occupant has back to sensor)
Up to 20'x20'	CM PDT 9*	Place within visual sight of main entry door
0-10V Dimming	WSX PDT D VLP ** or SPODMRD**	LED dimming control with or without motion sensor
Conference Rooms		(Typical Energy Savings: 30% - 50%) [†]
Up to 15'x15'	WSX PDT VLP** / WSX PDT D VLP**	Sensor will detect both motion and sound
Up to 20'x20'	CM PDT 9* or two CM PDT 9*	Place within visual sight of main entry door
Up to 30'x30'	WV PDT 16*	Place sensor in corner along entrance wall
Classrooms		(Typical Energy Savings: 40% - 60%) [†]
Up to 30'x30'	WV PDT 16*	Place sensor in corner along entrance wall
Greater than 30'x30'	Mult. WV PDT 16* or CM PDT 9*	Place sensors in opposite corners
Open Office Areas		(Typical Energy Savings: 20% -40%) [†]
8'-10' Mounting Height	Multiple CM PDT 9*	Place sensors on 25' - 30' centers and cover all entrances
Restrooms		(Typical Energy Savings: 50% - 80%) [†]
Private	WSX ** / WSX D**	For rooms without obstructions
Private with Fan	WSX 2P**	No obstructions, relay 1 controls lights, relay 2 is for fan
Up to 4 Stalls	WSX PDT VLP ** / WSX PDT D VLP **	For rooms with obstructions
4 to 7 Stalls	CM PDT 9*	Place within visual sight of the main entry door
More than 7 Stalls	Multiple CM PDT 9*	Contact your Acuity Sales Representative for assistance
Corridors		(Typical Energy Savings: 20% - 60%) [†]
9' Mounting Height	CM 10*	Place sensors 50' on center
12' Mounting Height	CM 10*	Place sensors 60' on center
Gymnasiums		(Typical Energy Savings: 20% - 50%) [†]
25' Mounting Height	LSXR 6	Place sensors on 40' centers and cover all entrances
Warehouses		(Typical Energy Savings: 20% - 50%) [†]
360°, 15' - 45' Mounting Height	LSXR 6	1 sensor per fixture
Aisle Control	LSXR 50	Coverage spans multiple fixtures

* Requires power pack(s). † Results typical; actual savings may differ.

**WSD series may be substituted in place of the WSX; see datasheet for product details.



Wall Switch Sensor
WSX



Wall Switch with Dimming
WSX D



Switch Interface
SPODMRD



Ceiling Mount Sensor
CM



Wide View Sensor
WV




Fixture Mount Sensor
LSXR

Wiring Diagrams



LINE VOLTAGE SENSOR

(i.e., CMR 9)



LOW VOLTAGE


Single Sensor (i.e., CM 9)

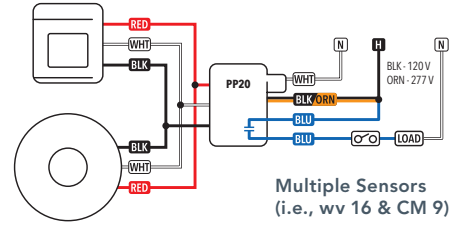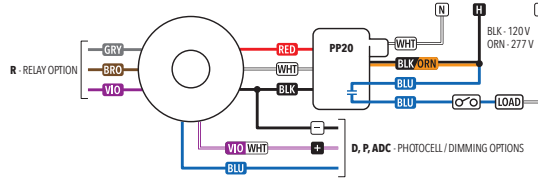

Multiple Sensors (i.e., wv 16 & CM 9)


WIRING TO GROUND (NO NEUTRAL)

Wall Switch Sensor Single Relay




WIRING TO NEUTRAL


Wall Switch Sensor Single Relay



Dual Relay

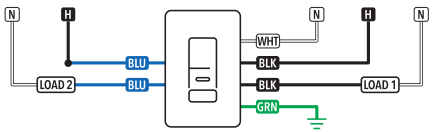

Dual Relay

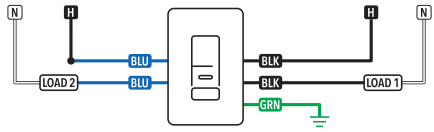

Wire Color Key for Wiring to Ground or Wiring to Neutral


120/277 VAC Wiring

Black*	Line 1 Input	Black Wires can be reversed
Black*	Load 1 Output	
Blue*	Line 2 Input	Blue Wires can be reversed
Blue*	Load 2 Output	

Notes:


- Unit will draw power from either line connection.
- When switching 277 VAC or 347 VAC on both relays, the line inputs must be of the same phase.

BI-LEVEL (AUTO-ON/MANUAL ON) SOLUTION WITH CEILING SENSOR: 2-GANG

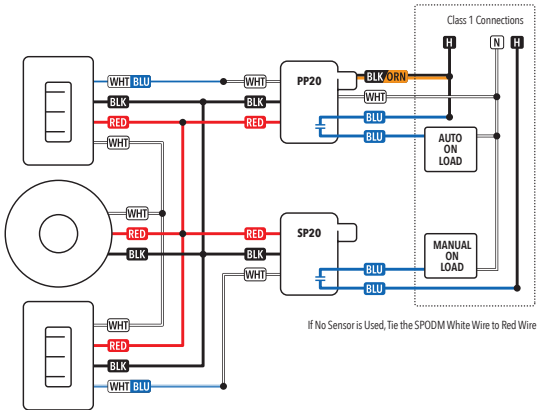


CONVERSION FROM GROUND ONLY (NO NEUTRAL) TO NEUTRAL WIRING WITH WALL SENSOR


The product is pre-configured for wiring without a neutral; however, if connection to neutral is required by code, contractors can quickly and easily convert the unit in seconds.



STEP 1
Remove Yellow Label



STEP 2
Loosen Screws & Remove Metal Link



STEP 3
Connect Neutral to Silver Screw & Ground to Green Screw


LINE VOLTAGE - SINGLE RELAY (I.E., LSXR XX)

Wiring to single Phase Power (120/277/347 VAC)

- Black^{1,2} 120/277 VAC input (red wire for 347 VAC)
 - Black^{1,2,3} Switched line voltage output to luminaire (Red wire for 347 VAC)
 - White Neutral
 - Violet Low voltage dimming output (0-10 VDC)
 - Gray Low voltage common
- Wires present with dimming options only

Notes

- Black wires can be reversed
- Wire is red for HVOLT version (required for 347 VAC)
- Disconnect and cap black output wire going to driver/ballast if switching fixture is not required.

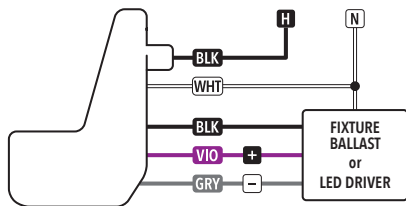

LINE VOLTAGE - DUAL RELAY (I.E., LSXR XX 2P)

Wiring to single Phase Power (120/277/347 VAC)

- Black^{1,2} Pole 1: 120/277 VAC input (red wire for 347 VAC)
- Black^{1,2,3} Pole 1: Switched line voltage output to luminaire (Red wire for 347 VAC)
- White Neutral
- Blue² Pole 2: 120/277/347 VAC Input
- Blue² Pole 2: Switched line voltage output to luminaire

Notes

- Black wires can be reversed.
- Blue wires can be reversed.
- Wire is red 347 VAC version.
- Red wires can be reversed.

