

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The Lithonia Lighting JEBL LED High bay is an affordable LED solution for users who prefer a luminaire with the look and feel of a round form factor. The JEBL delivers comfortable and uniform lighting from mounting heights up to 30ft. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.** [Click here for Acrylic and Polycarbonate Environmental Compatibility table for suitable uses.](#) **Certain airborne contaminants may adversely affect the functioning of LEDs and other electronic components, depending on various factors such as concentrations of the contaminants, ventilation, and temperature at the end-user location.** [Click here for a list of substances that may not be suitable for interaction with LEDs and other electronic components.](#)

**CONSTRUCTION** — JEBL features a white die-cast aluminum housing. Powder coat corrosion resistant finish provides 500 hours salt fog rating. Optional clear polycarbonate or diffuse aluminum reflectors available separately. Corrosion resistant external hardware standard.

**OPTICS** — A .16" thick clear tempered glass lens protects LEDs. Placement, spacing, and aperture of LEDs provides a 120 degree spread of light. Optional frosted glass available.

**ELECTRICAL** — High-efficiency LEDs. 0-10V dimming standard for a dimming range of 100% to 10%. Input voltage is MVOLT (120-277V) and HVOLT (347-480V). Suitable for 50/60Hz.

Luminaire Surge Protection Level: Designed to withstand up to 6kV/3kA per ANSI C82.77-5-2015.

L90 > 54,000 hours.

**CONTROLS** — Dimming and non-dimming sensors, along with nLightAIR, may be factory installed utilizing the wiring box accessory that is attached to the top of the fixture.

**INSTALLATION** — 1/4" NPT eye bolt with 1/2" thick loop and 6' cord with dimming lead provided for easy installation. 3/4" mounting adapter available for stem (by others) or hook mounting. Optional surface mount bracket allows flexibility by adjusting in 15 degree increments for a total range of 150 degrees. Also capable of accepting 3/4" stem (by other) or hook.

**LISTINGS** — UL/C-UL listed to US and Canadian Safety Standards. Wet location listed. For use under covered ceilings. See ambient temperature chart on page 3. IP65 rated. NSF Splash Zone 2 and Non-Food Zone rated. DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

LED High Bay

**JEBL**



### A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks marked by a [shaded background](#)\*

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

\*See ordering tree for details

# LED High Bay



A+ Capable options indicated by this color background.



Looking for Contractor Select readily available configurations? Click here to visit Contractor Select™ spec sheet or go to [www.contractorselect.com](http://www.contractorselect.com)

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** JEBL 18000LM GL MVOLT 40K 80CRI DWHXD

Series	Lumens ‡	Lens	Voltage	Color Temperature	Color Rendering Index	Mounting
JEBL	12000LM 12,000 lumens 18000LM 18,000 lumens 24000LM 24,000 lumens 30000LM 30,000 lumens	GL Glass lens FRGL Frosted Glass lens PFL Polycarbonate Frosted Lens	MVOLT (120-277V) HVOLT (347-480V) 120 120V 208 208V 240 240V 277 277V 347 347V 480 480V	40K 4000 K 50K 5000 K	80CRI 80 CRI	(blank) standard eyebolt PM Pendant mount, 3/4 adapter installed

Options	Finish
<b>WGX</b> wire guard installed <b>SMB</b> Surface mount bracket ‡ <b>WBF</b> Wiring box required for sensor and cord attachment, factory installed <b>SCF120</b> Safety cable 120" <b>SCF240</b> Safety cable 240" <b>HKM</b> Hook, male, damp location ‡ <b>HKF</b> Hook, female, damp location ‡ <b>LPM</b> Loop, male, damp location ‡ <b>LPF</b> Loop, female, damp location ‡ <b>Cordsets:</b> <b>HC3PC3RWT</b> Wet location, hook, 3' cord, plug and receptacle ‡ <b>OCS</b> RELOC® OnePass® selectable cable 6' installed (dry location labeled) ‡ <b>OCU</b> RELOC® OnePass® unselectable cable 6' installed (must specify tap position) (dry location labeled) ‡ <b>CS88</b> Brad Harrison 3P male straight 600V molded plug, 6' type ST00W yellow PVC cord, 16/3, must specify voltage, wet location ‡ <b>CS88L12</b> Brad Harrison 3P male straight 600V molded plug, 12' type ST00W yellow PVC cord, 16/3, must specify voltage, wet location ‡ <b>CS89L12</b> 12' white cord, 16/3, no plug, wet location ‡ <b>CS6G16STOW5D</b> 6' white cord, 16/5, no plug, includes low voltage dimming wires, wet location ‡ <b>C6PW</b> 6' white cord with NEMA twist lock plug, wet location ‡ <b>C12PW</b> 12' white cord with NEMA twist lock plug, wet location ‡ <b>L/DIM</b> less dimming cord ‡	<b>Controls: ‡</b> <b>Non -Dimming Sensors:</b> <b>SBOR10</b> 360° motion sensor integral, low bay 8-15 ft., on/off, IP66 rated. <a href="#">SBOR spec sheet</a> <b>SBOR10 P</b> 360° motion sensor integral with photocell & occupancy sensor, low bay 8-15 ft., on/off, IP66 rated. <a href="#">SBOR spec sheet</a> <b>SBOR6</b> 360° motion sensor integral, high bay 15-30 ft., on/off, IP66 rated. <a href="#">SBOR spec sheet</a> <b>SBOR6 P</b> 360° motion sensor integral with photocell & occupancy sensor, high bay 15-30 ft., on/off, IP66 rated. <a href="#">SBOR spec sheet</a> <b>Dimming Sensors:</b> <b>SBOR10 D 3V</b> 360° motion sensor integral, low bay 8-15 ft., on/off with second time-out period, goes to a dimmed state before turning off max./min. Dim setting, IP66 rated. <a href="#">SBOR spec sheet</a> <b>SBOR6 D 3V</b> motion sensor integral, high bay 15-30 ft., on/off with second time-out period, goes to a dimmed state before turning off max./min. Dim setting, IP66 rated. <a href="#">SBOR spec sheet</a> <b>nLight wireless: ‡</b> <b>NLTAIR2 RSBOR6</b> nLight AIR Generation 2 enabled 360° high mount motion sensor <a href="#">RSBOR spec sheet</a> <b>NLTAIR2 RSBOR10</b> nLight AIR Generation 2 enabled 360° low mount motion sensor <a href="#">RSBOR spec sheet</a>
<b>DBLXD</b> Super durable, black	<b>DWHXD</b> Super durable, white

NOTE: ‡ indicates option chosen has ordering restrictions. Please reference ordering restrictions chart below. Options are sorted alphabetically.

Accessories: Order as separate catalog number.	
JEBLPCLR1 M4	Polycarbonate clear reflector for 12L and 18L
JEBLDALR1 M4	Diffuse Aluminum reflector for 12L and 18L
JEBLPCLR2 M4	Polycarbonate clear reflector for 24L and 30L
JEBLDALR2 M4	Diffuse Aluminum reflector for 24L and 30L
JEBLMTG ADAPTER M12	3/4" mounting adapter
JEBLSMB1 M6	Surface mount bracket for 12L and 18L
JEBLSMB2 M6	Surface mount bracket for 24L and 30L
JEBLSMB1DBLXD	Black surface mount bracket for 12L and 18L
JEBLSMB2DBLXD	Black surface mount bracket for 24L and 30L
JCBLSCL120	Safety cable 120"
JCBLSCL240	Safety cable 240"
JEBLWG1 M6	Wire guard for use with 12000LM or 18000LM fixtures
JEBLWG2 M6	Wire guard for use with 24000LM or 30000LM fixtures

‡ Option Value Ordering Restrictions	
Option value	Restriction
C12PW	Not available with MVOLT or HVOLT. Requires WBF option. If black cord is required remove "W". EX: C12P
C6PW	Not available with MVOLT or HVOLT. If black cord is required remove "W". EX: C6P. Black cord ships standard when DBLXD is ordered.
Controls	Require WBF option.
CS6G16STOW5D	Not available with SBOR10 D 3V, SBOR6 D 3V, SBOR10 P, SBOR6 P, or any NLTAIR@ sensor. Requires WBF option.
CS88	Requires WBF option.
CS88L12	Requires WBF option.
CS89L12	Requires WBF option.
HC3PC3RWT	PM option required. Not available with MVOLT or HVOLT. Requires WBF option.
HKF	PM option required
HKM	PM option required
L/DIM	Select this option when original dimming cord is not required. If this option is selected there will be no access to dimming leads. When L/DIM is ordered without an option requiring the wiring box, it will resort to a damp location listing.
LPF	PM option required
LPM	PM option required
Lumens	See ambient temperature chart on page 3 for compatible ambient rating.
nLight wireless	Normal luminaires (non-emergency) can be used as a normal power sensing device for nearby nLight AIR devices and luminaires with EM emergency options.
OCS	Not available with MVOLT or HVOLT. Requires WBF option. Available also in 10', 15', and 20'. EX: OCS15
OCU	Not available with MVOLT or HVOLT. Requires WBF option.
SMB	Bracket finish will match finish of fixture.

# LED High Bay

## ACCESSORIES



## OPERATIONAL DATA

Lumen package	Voltage	Reflector	CCT	CRI	Nominal lumens			Wattage
					Lens type			
					GL	FRGL	PFL	
12000LM	MVOLT	No reflector	40K	80CRI	13630	11703	11581	95
			50K		13790	11840	11717	
		DALR	40K		12565	11047	10770	
			50K		12713	11176	10896	
	HVOLT	No reflector	40K		13285	11407	11289	92
			50K		13381	11489	11370	
		DALR	40K		12248	10767	10497	
			50K		12337	10845	10573	
18000LM	MVOLT	No reflector	40K		19303	16574	16402	135
			50K		19529	16765	16594	
		DALR	40K		17796	15644	15252	
			50K		18005	15828	15431	
	HVOLT	No reflector	40K		19679	16897	16722	136
			50K		19821	17018	16842	
		DALR	40K		18143	15949	15549	
			50K		18274	16064	15661	
24000LM	MVOLT	No reflector	40K		24181	20762	20547	174
			50K		24464	21006	20788	
		DALR	40K		22294	19598	19107	
			50K		22555	19828	19331	
	HVOLT	No reflector	40K		26558	22803	22566	181
			50K		26749	22967	22729	
		DALR	40K		24485	21524	20985	
			50K		24661	21679	21136	
30000LM	MVOLT	No reflector	40K		30263	25984	25715	215
			50K		30618	26289	26016	
		DALR	40K		27901	24527	23912	
			50K		28228	24815	24193	
	HVOLT	No reflector	40K		31421	26979	26699	218
			50K		31647	27173	26891	
		DALR	40K		28969	25466	24828	
			50K		29178	25649	25006	

## AMBIENT TEMPERATURE RATING


Lumen package	GL/FRGL	PFL	Minimum Ambient Temp
12000LM	55	50	-40
18000LM	55	35	-40
24000LM	50	40	-40
30000LM	45	35	-40

\* All temperatures are listed in Celcius.



# LED High Bay

## DIMENSIONS



All dimensions are in inches  
unless otherwise indicated.

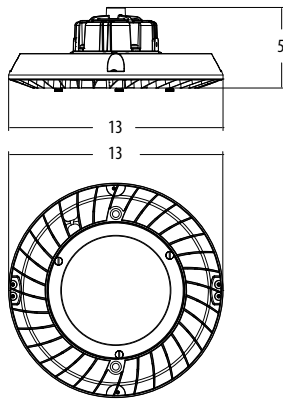



**JEBL 12L/18L**

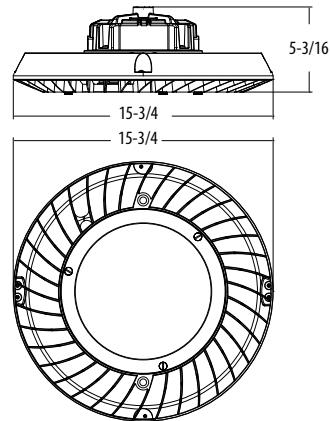



**JEBL 24L/30L**





**JEBLDARL1**



**JEBLDARL2**



**JEBLSMB1**

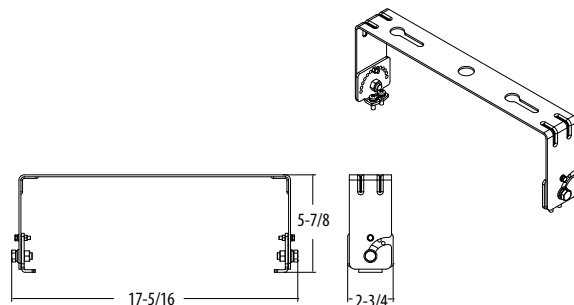

**JEBLSMB2**