

## FEATURES & SPECIFICATIONS

**INTENDED USE** — LED lighted exit signs for marking the means of egress in accordance with NFPA101 (current Life Safety Code).

**CONSTRUCTION** — Injection-molded, flame-retardant, high-impact, thermoplastic housing with snap-fit design components for easy installation. Universal J-box pattern. Universal chevrons are easily removed for directional indication.

Fully assembled single face with extra faceplate for easy field-conversion to double face. Letters 6" high with 3/4" stroke, with 100 ft viewing distance rating, based on UL924 standards.

**OPTICS** — The typical life of the exit LED lamp is 5 years, based on 24/7 operation.

**ELECTRICAL** — Dual-voltage input 120V or 277V AC, 60Hz.

Battery: (EL models) maintenance-free ni-cad battery provides 90 minutes of emergency power. The emergency model includes the test switch, status indicator and rechargeable battery. Allow 24 hours to completely charge for full operation.

**INSTALLATION** — Universal (top-, end-, or back-) mounting (canopy included). Easily removed mounting knockouts. J-box pattern on back panel.

Ships standard with additional face plate.

**LISTINGS** — UL indoor damp location listed 50°-104°F (10°-40°C) standard. Meets UL924, NFPA 101 (current Life Safety Code), FCC Title 47, Part 15, Subpart B, NFPA 70-NEC and OSHA illumination standards.

**WARRANTY** — 2-year limited warranty. (Battery is prorated.) This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

† Exit Signs Certified in the CA Title 20 Appliance Efficiency Database.

Catalog Number
Notes
Type

### Thermoplastic Exits

# EXR & EXG LED




### LED LAMPS



#### Specifications

Length: 11.63 (29.5)  
 Depth: 1.63 (4.1)  
 Height: 7.2 (18.3)  
 Weight: 2.1 lbs

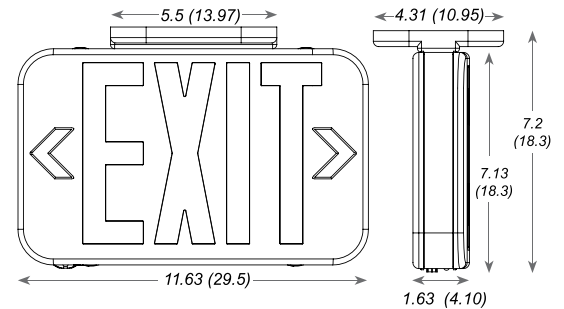

All dimensions are inches (centimeters) unless otherwise specified.



Looking for Contractor Select readily available configurations? Click here to visit Contractor Select™ spec sheet or go to [www.contractorselect.com](http://www.contractorselect.com)

### ORDERING INFORMATION

For shortest lead times, configure product using bolded options.

**Example:** EXR LED B

Series	Housing Color	Operation
<b>EXR LED</b> Red	<b>B</b> Black	<b>EL</b> Nickel cadmium battery
EXG LED Green		

<b>Accessories:</b> Order as separate catalog number. <sup>1</sup>	
ELA WG1	Back-mount wireguard

#### Notes

1 See spec sheet [ELA-WG](#).

## SPECIFICATIONS

BATTERY				
Nickel Cadmium				
Voltage	Typical shelf life <sup>1</sup>	Typical life <sup>1</sup>	Maintenance <sup>2</sup>	Temperature range <sup>3</sup>
1.2	3 years	6-8 years	none	50°F - 104°F (10°C - 40°C)

### Notes

- 1 At 77°F (25°C).
- 2 All life safety equipment, including emergency lighting for path of egress must be maintained, serviced and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service, or testing could jeopardize the safety of occupants and will void all warranties.
- 3 Temperature range where unit will provide capacity for 90 minutes. Higher and lower temperatures affect life and capacity.