



RSXF LED Floodlights

One Family Does It All...

The RSXF LED floodlights are designed with the specifier in mind through its wide assortment of lumen packages, mountings and photometric distributions. The innovative area wide forward distribution will provide even illumination in large yards that rely on perimeter lighting. Not only will these floodlights provide superior lighting, they will do so at prices that will allow customers to meet their financial payback thresholds.

Energy and Maintenance Savings

RSXF LED floodlights save up to 77% when replacing existing metal halide luminaires. Paired with nLight® AIR wireless networked controls, an additional 50+% energy savings can be achieved by dimming the luminaires during periods of low occupancy. With an expected service life of 20 years, these products eliminate costly lamp and ballast changes.

Easy Installation

With the industry's best adjustable slipfitter, the RSXF LED floodlights are easy to install and aim. An integral wiring box makes RSXF easy to install and wire, without accessing the electrical compartment, while the 5-degree adjustment increments make precision aiming easy.

Made to Order and Quick Delivery

RSXF LED floodlights offer an expansive range of lumen packages, photometric distributions, mounting mechanisms, color temperatures and finishes, allowing for seamless upgrades to existing installations. Since the RSXF LED floodlights are made in North America, all of these options are available with an industry-leading delivery of 21 days or less to the job site.



Quick Facts:

- Four sizes replace 70W – 1500W HID luminaires
- 7,000 to 85,000 lumens
- Super-efficient – up to 155 LPW
- Six photometric distributions
- Five unique mounting configurations
- Made in North America
- 5-year warranty



RSXF LED Floodlights

Performance Packages*

Luminaire	RSXF1					RSXF2					RSXF4		
Power Package	P1	P2	P3	P4	P5	P4	P5	P6	P7	P8	P6	P7	P8
Lumens (4000K, WFL)	7,169	9,941	14,154	16,446	22,897	24,730	26,612	29,749	38,495	44,398	69,690	71,181	82,895
Watts	51W	72W	109W	133W	164W	187W	210W	244W	274W	326W	546W	520W	646W
LPW	141	138	130	124	140	132	127	122	140	136	128	137	128
Replaces	175W	250W	400W				1000W				1000W or 1500W		


*The fully configurable RSXF series including the RSXF3 (not shown) is available with additional performance packages, options and accessories. Consult specification sheets for more information or visit www.lithonia.com

Mounting Configurations

RSXF LED floodlights are available with the industry's best adjustable slipfitter and a variety of other mounting options. Compatible with 2 3/8" O.D. tenons, this robust slipfitter makes installation quick and easy with a spacious integral wiring compartment. Aiming can be adjusted in 5-degree increments and hex socket set screws provide a secure and attractive means of attachment to the tenon.



Integral Slipfitter

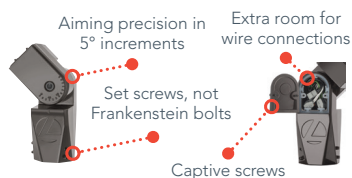

Mountings Designed for the Contractor



Yoke Mount



Adjustable Arm
Square/Round Pole Mount



Adjustable Arm
Wall Mount




Adjustable Arm Wall Mount
with Surface Conduit Box

Photometric Distributions

RSXF LED floodlights have a wide offering of flood photometric distributions that provide superior illumination. Options include an innovative "area wide forward" distribution that evenly illuminates large sites that rely on perimeter lighting.



Area Wide Forward
(AWFD)
Shown at 45° Tilt




Wide Flood
(WFL)
Shown at 45° Tilt



Medium Flood
(MFL)
Shown at 45° Tilt



Narrow Flood
(NFL)



Spot
(SP)



Narrow Spot
(NSP)



Please check the DLC Qualified Products List at www.designlights.org/QPL for more product detail.

Visit www.lithonia.com for more information.