

Hydrel 4750L Empowering Exceptional Lighting Experiences

The 4750L is designed for challenging outdoor applications delivering high performance and efficacy. Complete with Static White, Tunable White and RGBW options, the 4750L is an ideal tool for elevating nighttime experiences.

Best Performance and Efficiency in its category

**2000 LMF (nominal lumens / ft)
High Efficiency 134 LPW**

- Typical competitors are 1000 LMF and less than 90LPW]


Do More with Less

2x the performance: Hydrel 2ft fixtures provide the performance of competitive 4ft fixtures


- Use fewer 4' fixtures
- Use 2' fixtures instead of 4' fixtures
- Illuminate areas not possible with other fixtures
- Smaller fixtures and footprint

Fewer Feet = Reduced Cost


\$\$ < \$\$\$

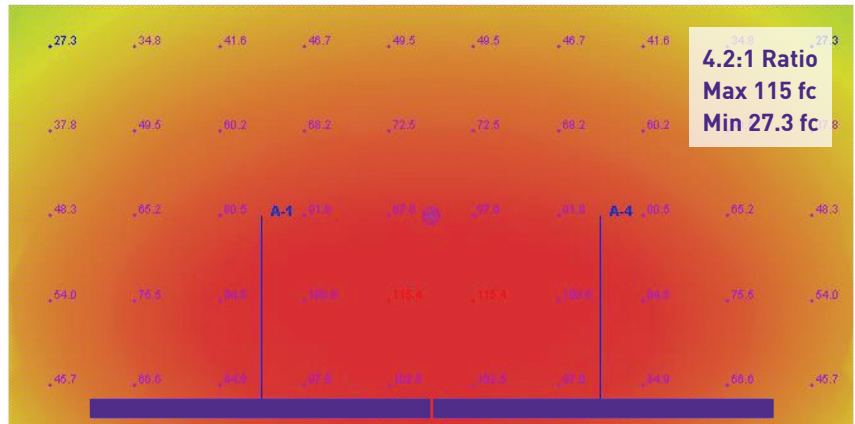

Two 4' competitors (8000 lumens)

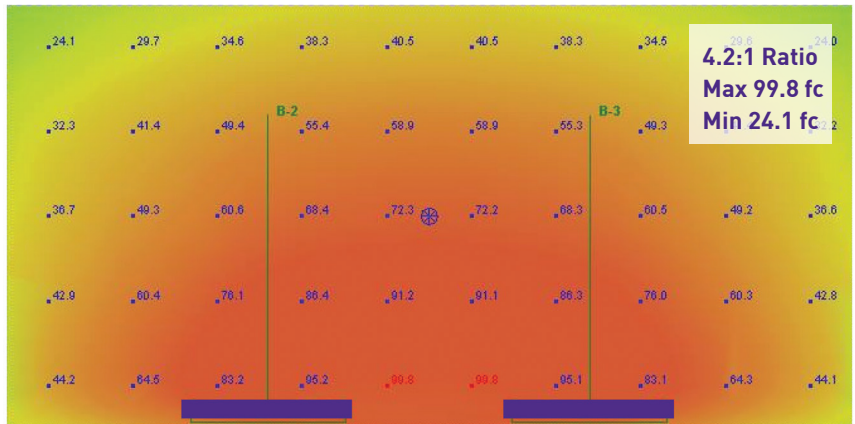

Two 2' Hydrel 4750 (8000 Lumens)

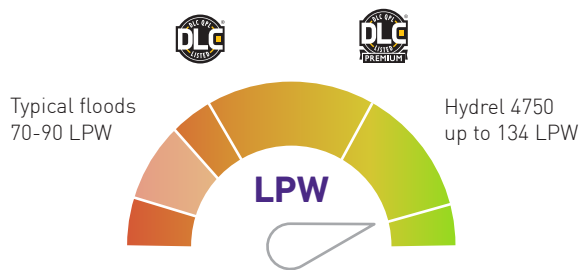


**Hydrel 4750L
up to 134 LPW**

**Typical floods
70-90 LPW**

Product Details

Available in 2' and 4' lengths

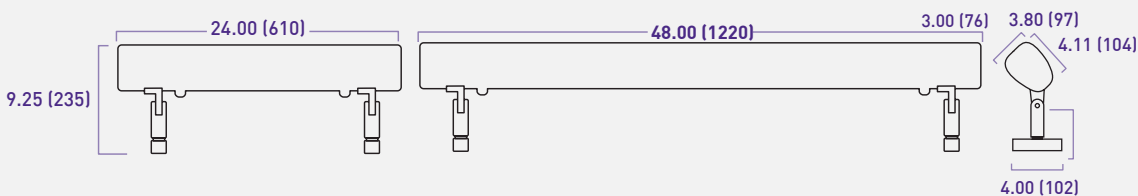

Ratings

IP67
2700K-6500K



Rhythm Range*




3G
Vibration

Design Lights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

Distributions


5 distributions available in individual and continuous run configurations

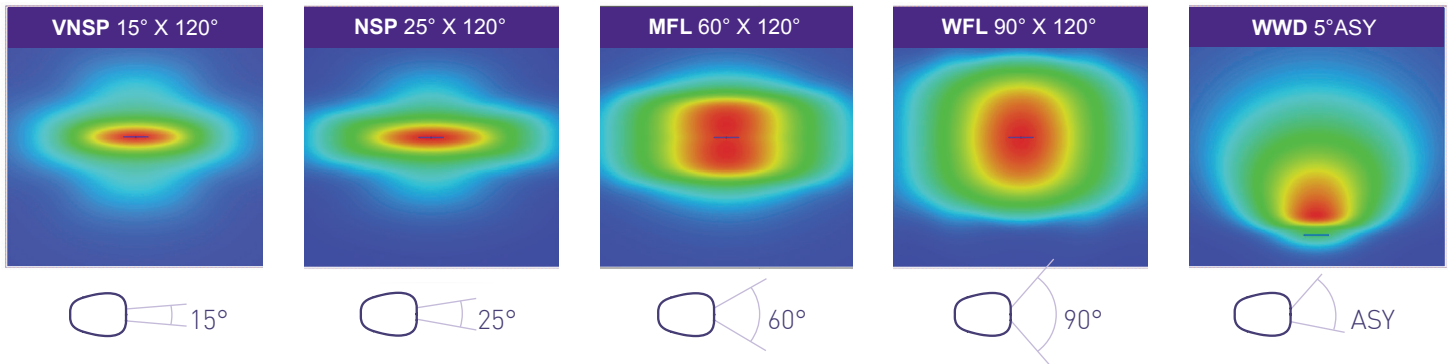


Proven: Durability and Water Management

Water Flow Through

4750L is designed to allow the water to easily flow through the fixture

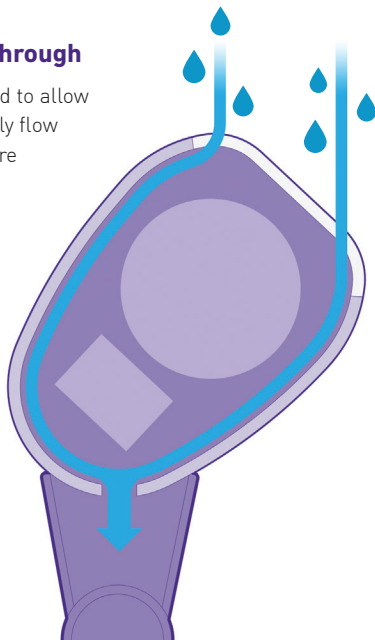


Prevent water intrusion with a double sealed tube design

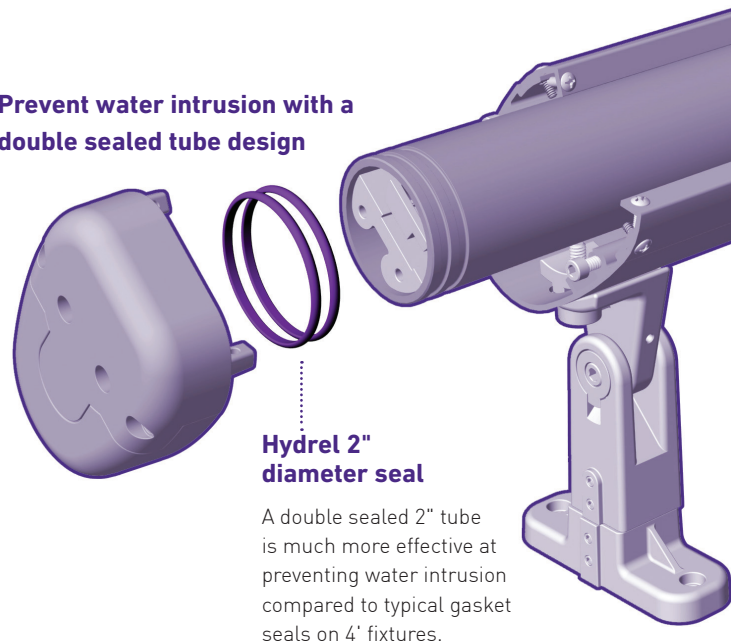


Continuous Run Configuration

IP rated quick connect jumper allows for efficient end to end continuous run installations

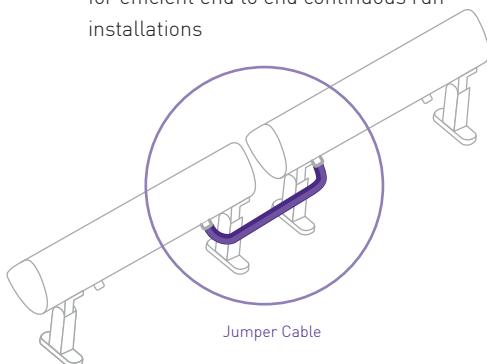

Mounting Options

Ground Mounting

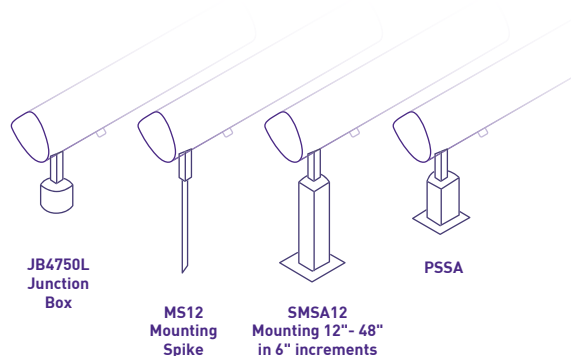

Wall Mounting

