



KBR8 LED

LED Specification Bollard



Catalog Number
Notes
Type


Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

8" Round
(20.3 cm)

Height: 40"
(101.6 cm)

Weight (max): 27 lbs
(12.25 kg)

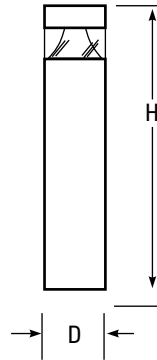

Introduction

The KBR8 Bollard is a stylish, fully integrated LED solution for walkways. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 70% in energy savings over comparable 100W metal halide luminaires, the KBR8 Bollard is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

Ordering Information

EXAMPLE: KBR8 LED 16C 700 40K SYM MVOLT DDBXD

KBR8 LED												
Series	LEDs	Drive current		Color temperature		Distribution		Voltage	Control options	Other options	Finish <i>(required)</i>	
KBR8 LED	Asymmetric 12C 12 LEDs ¹	350	350 mA	30K	3000 K	ASY	Asymmetric ¹	MVOLT ⁵	Shipped installed PE Photoelectric cell, button type DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) ELCW Emergency battery backup, CA Title 20 Noncompliant ⁶	Shipped installed SF Single fuse (120, 277, 347V) ^{4,7} DF Double fuse (208, 240V) ^{4,7} H24 24" overall height H30 30" overall height H36 36" overall height FG Ground-fault festoon outlet L/AB Without anchor bolts (3 bolt base) L/AB4 4 bolt retrofit base without anchor bolts ⁸	DWHXD	White
		450	450 mA ^{3,4}	40K	4000 K			120 ⁵			DNAXD	Natural aluminum
		530	530 mA	50K	5000 K	208 ⁵	DDBXD	Dark bronze				
	700	700 mA	AMBPC	Amber phosphor converted	240 ⁵	DBLXD	Black					
	Symmetric 16C 16 LEDs ²			AMBLW	Amber limited wavelength ^{3,4}			277 ⁵		DDBTXD	Textured dark bronze	
						347 ⁴		DBLBXD	Textured black			
										L/AB	DNATXD	Textured natural aluminum
										L/AB4	DWHGXD	Textured white

Accessories

Ordered and shipped separately.

MRAB U Anchor bolts for KBR8 LED³

NOTES

- Only available in the 12C, ASY version.
- Only available in the 16C, SYM version.
- Only available with 450 AMBLW version.
- Not available with ELCW.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options), or photocontrol (PE option).
- Not available with 347V. Not available with fusing. Not available with 450 AMBLW.
- Single fuse (SF) requires 120, 277, or 347 voltage option. Double fuse (DF) requires 208 or 240 voltage option.
- MRAB U not available with L/AB4 option.



Performance Data

Actual values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Lumen performance may differ as a result of end-user environment and application. Actual wattage may differ by +/- 8% when operating between 120-480V +/- 10%.

Light Engines	Drive Current	System Watts	3000 K					4000 K					5000 K					Limited Wavelength Amber					
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	
Asymmetric 3 Engines (12 LEDs)	350	16	641	40	1	1	1	809	51	1	1	1	870	54	1	1	1						
	530	22	947	43	1	1	1	1,191	54	1	1	1	1,282	58	1	1	1						
	700	31	1,214	40	1	1	1	1,527	51	1	1	1	1,646	55	1	1	1						
	Amber 450	16																324	20	0	1	0	
Symmetric 4 Engines (16 LEDs)	350	20	888	44	1	0	0	1,116	56	1	0	0	1,203	60	1	0	0						
	530	28	1,254	45	1	0	0	1,598	57	1	0	1	1,719	61	1	0	1						
	700	39	1,608	41	1	0	1	2,022	52	1	0	1	2,180	56	2	0	1						
	Amber 450	20																374	19	0	0	0	

Note: Available with phosphor-converted amber LED's (nomenclature AMBPC). These LED's produce light with 97+% >530 nm. Output can be calculated by applying a 0.7 factor to 4000 K lumen values and photometric files.

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.00	0.98	0.97	0.95


Electrical Load

Light Engines	Drive Current (mA)	System Watts	Current (A)				
			120	208	240	277	347
12C	350	16W	0.158	0.118	0.114	0.109	0.105
	530	22W	0.217	0.146	0.136	0.128	0.118
	700	31W	0.296	0.185	0.168	0.153	0.139
	Amber 450	16W	0.161	0.120	0.115	0.110	0.106
16C	350	20W	0.197	0.137	0.128	0.121	0.114
	530	28W	0.282	0.178	0.162	0.148	0.135
	700	39W	0.385	0.231	0.207	0.185	0.163
	Amber 450	20W	0.199	0.139	0.130	0.123	0.116

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [KBR8 Bollard homepage](#).

Isofootcandle plots for the KB LED Bollards. Distances are in units of mounting height (3').

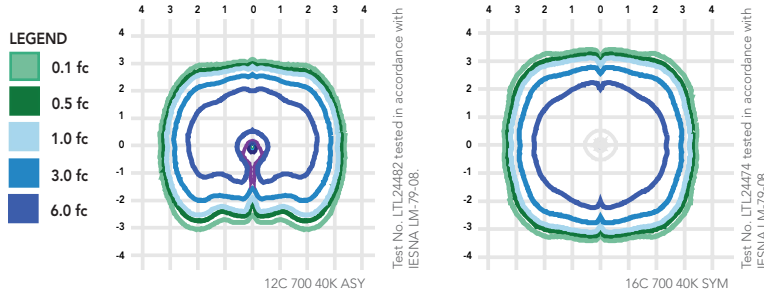

FEATURES & SPECIFICATIONS

INTENDED USE

The rugged construction and clean lines of the KBA bollard is ideal for illuminating building entryways, walking paths, and pedestrian plazas, as well as any other location requiring a low mounting height light source with fully cutoff illumination.

CONSTRUCTION

One-piece 8-inch round extruded aluminum shaft with thick side walls for extreme durability, a high-impact clear acrylic lens and welded top cap. Die-cast aluminum mounting ring allows for easy leveling even in sloped locations and a full 360-degree rotation for precise alignment during installation. Three 1/2" x 11" anchor bolts with double nuts and washers and 3 3/4" bolt circle template ensure stability. Overall height is 42" standard.

FINISH

Exterior parts are protected by a zinc-infused super durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering for maximum retention of gloss and luster. A tightly controlled multi-stage process ensures a minimum 3-mil thickness for a finish that can withstand the elements without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Two fully cutoff optical distributions are available: symmetrical and asymmetrical. IP66 sealed LED light engine provides smoothly graduated illumination without any uplight. Light engines are available in standard 4000 K (>70 CRI) or optional 3000 K (>80 CRI) or 5000 K (67 CRI). Limited-wavelength amber LEDs are also available.

ELECTRICAL

Light engines consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (L95/100,000 hours at 700mA at 25°C). Class 2 electronic drivers are designed for an expected life of 100,000 hours with < 1% failure rate. Electrical components are mounted on a removable power tray.

LISTINGS

CSA certified to U.S. and Canadian standards. Light engines are IP66 rated. Rated for -40°C minimum ambient. Cold-weather emergency battery backup rated for -20°C minimum ambient.

GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.
BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act. Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY

Five-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

